

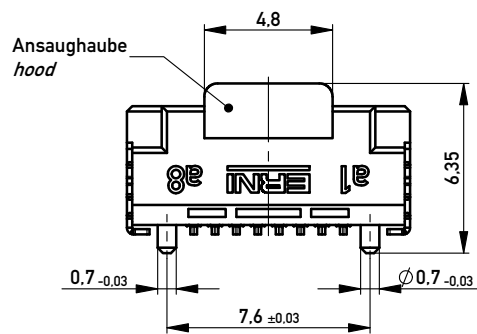
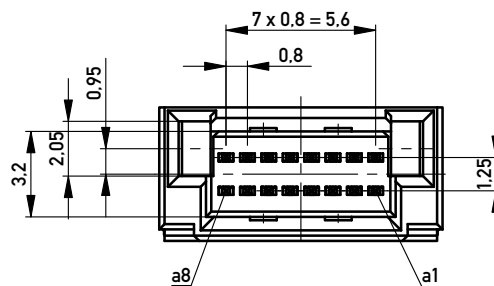



ohne Ansaughaube - without hood

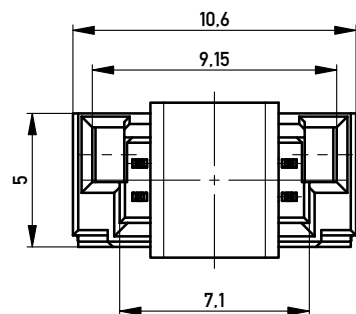


ohne Ansaughaube - without hood

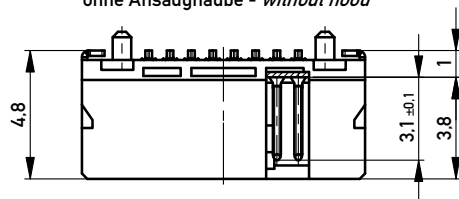


Leiterplatten-Layout Vorschlag für SMT
PCB-Layout Proposal for SMT

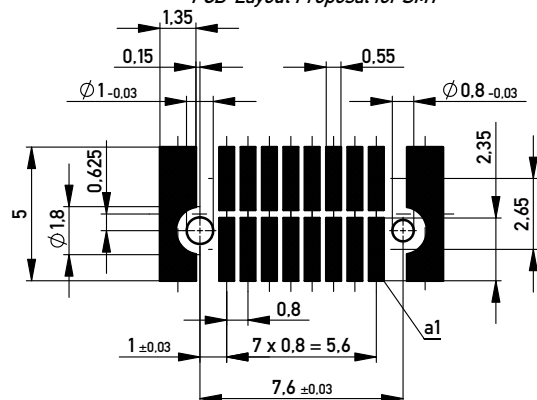

Verpackt in Gurtverpackung - Tape on Reel Packaging
Verpackungseinheit: 720 Stück - Packaging unit: 720 pcs

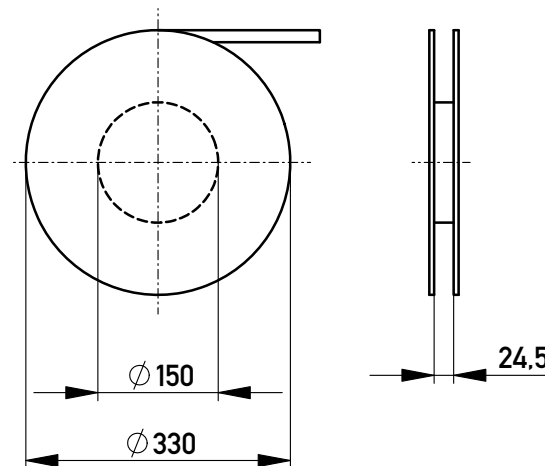

Abspulrichtung - Reel off Direction

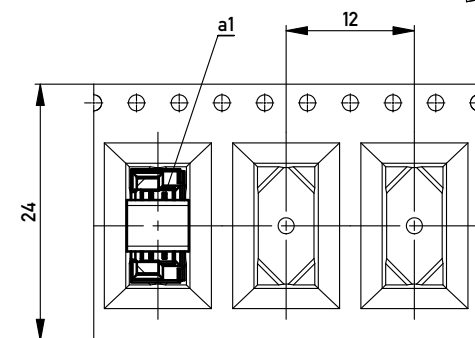

Anforderungsstufe 2
Performance Level 2

Kontaktbereich vergoldet
Mating Area gold plating

Anschlussbereich verzinkt 4-6 µm
Terminal Area 4-6 µm tin plating

Koplanarität der Anschlüsse ≤ 0,1 mm
Coplanarity Area of Termination ≤ 0,1 mm

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 9006 to be observed.

Proprietary notice pursuant to ISO 9001 to be observed.	Information:			Tolerances		 All Dimensions in mm		Scale		5:1	
	All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.			Subject to modification without prior notice. Drawing will not be updated.		Designation					
						0,8 DRC-Q, M 1mm, 16 polig <i>0,8 DRC-Q, M 1mm, 16 pin</i>					
						454927					
c		24.09.2012		 www.ERNI.com		I		A3			
Index		Date				Class		DRCQ			