

Photo Interrupter

KIT5033C

Description

The KIT5033C is a photo interrupter high-performance standard type, combines high-output GaAs IRED with high sensitive phototransistor..

Features

- Snap-in mount
- GAP : 5.0mm
- 3 kinds of mounting plate thicknesses :
1.0mm, 1.2mm, 1.6mm
- RoHS compliant

Applications

- Printers.
- Copiers
- ATM
- Ticket vending machines

Absolute Maximum Ratings ($T_a=25^{\circ}\text{C}$, Unless otherwise specified)

Characteristic		Symbol	Ratings	Unit
Input	Power Dissipation	P_D	75	mW
	Forward Current	I_F	50	mA
	Reverse Voltage	V_R	6	V
	Peak Forward Current ^{*1}	I_{FP}	1	A
Output	Collector Current	I_C	20	mA
	Collector-Emitter Voltage	V_{CEO}	35	V
	Emitter-Collector Voltage	V_{ECO}	6	V
Operating Temperature ^{*2}		T_{opr}	-30 ~ +95	$^{\circ}\text{C}$
Storage Temperature ^{*2}		T_{stg}	-40 ~ +100	$^{\circ}\text{C}$

*1 : Pulse width (tw) $\leq 100\mu\text{s}$, Period (T) = 10msec.



*2 : No icebond or dew.

The contents of this data sheet are subject to change without advance notice for the purpose of improvement.
When using this product, would you please refer to the latest specifications.

Electrical Characteristics (T_a=25°C)












Characteristic		Symbol	Test Condition	Min.	Typ.	Max.	Unit
Input	Forward Voltage	V _F	I _F =20mA	-	1.2	1.4	V
	Peak Wavelength	λ _p	I _F =20mA	-	940	-	nm
	Reverse Current	I _R	V _R =5V	-	-	10	uA
Output	Dark Current	I _{CEO}	V _{CE} =10V, E=0lux	-	1	100	nA
	Peak Wavelength	λ _p	-	-	880	-	nm
Transfer Charac- teristics	Collector Current	I _C	V _{CE} =5.0V, I _F =20mA	0.5	-	15.0	mA
	C-E Saturation Voltage	V _{CE(sat)}	I _C =0.5mA, I _F =20mA	-	-	0.4	V
Response Time	Rise Time	t _r	V _{CC} =5.0V, I _C =2mA RL=100Ω	-	3	15	usec
	Fall Time	t _f		-	4	20	usec

* Circuit for Measuring Response Time

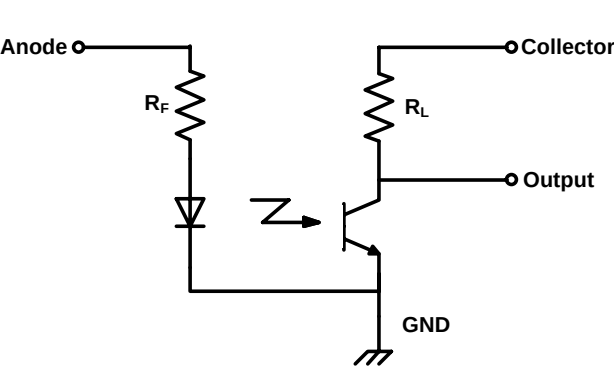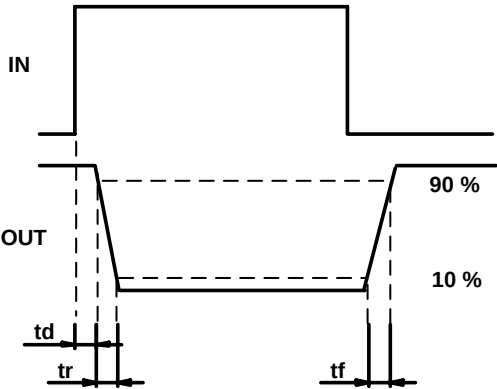


The contents of this data sheet are subject to change without advance notice for the purpose of improvement.
When using this product, would you please refer to the latest specifications.

Characteristics

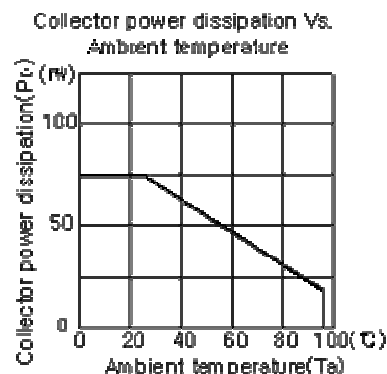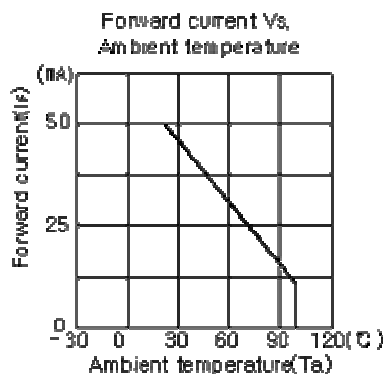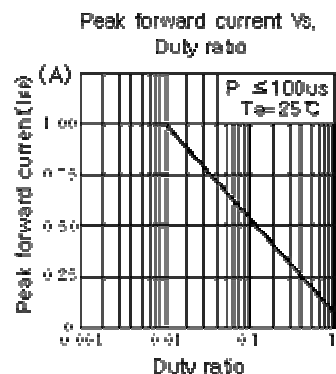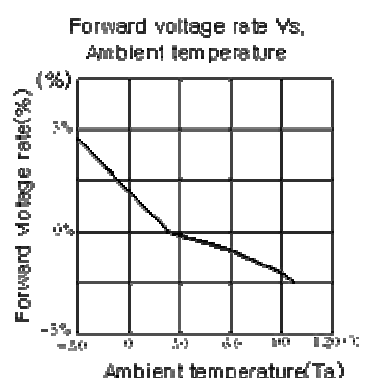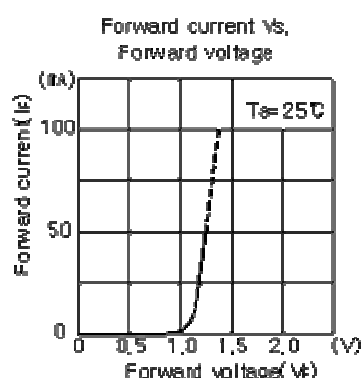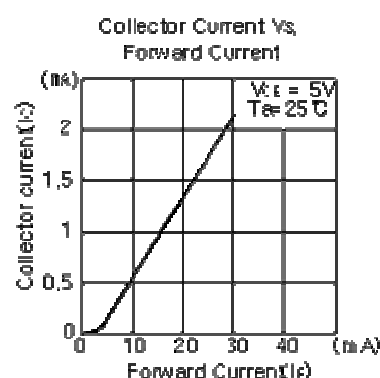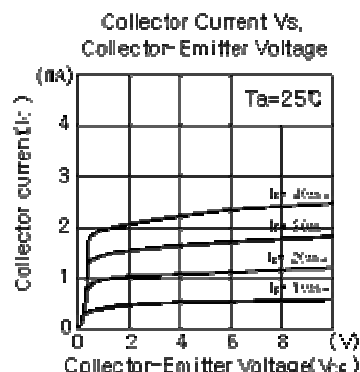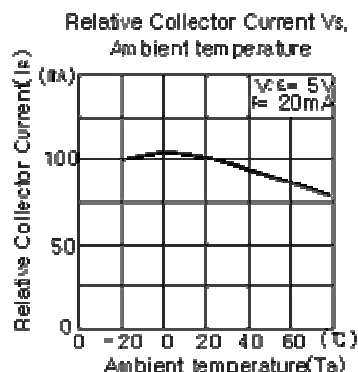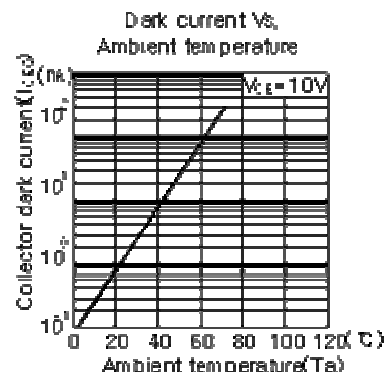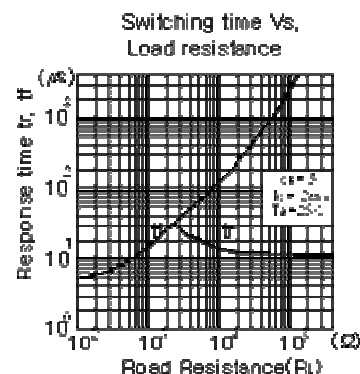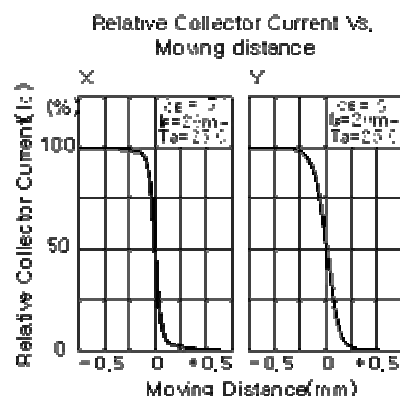


Method of measuring position detection characteristic

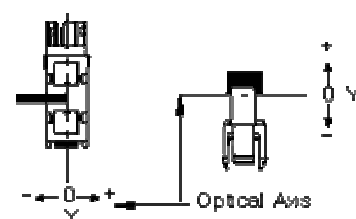

The contents of this data sheet are subject to change without advance notice for the purpose of improvement. When using this product, would you please refer to the latest specifications.

Package Outline Dimensions

(ALL DIMENSIONS IN MILLIMETERS)

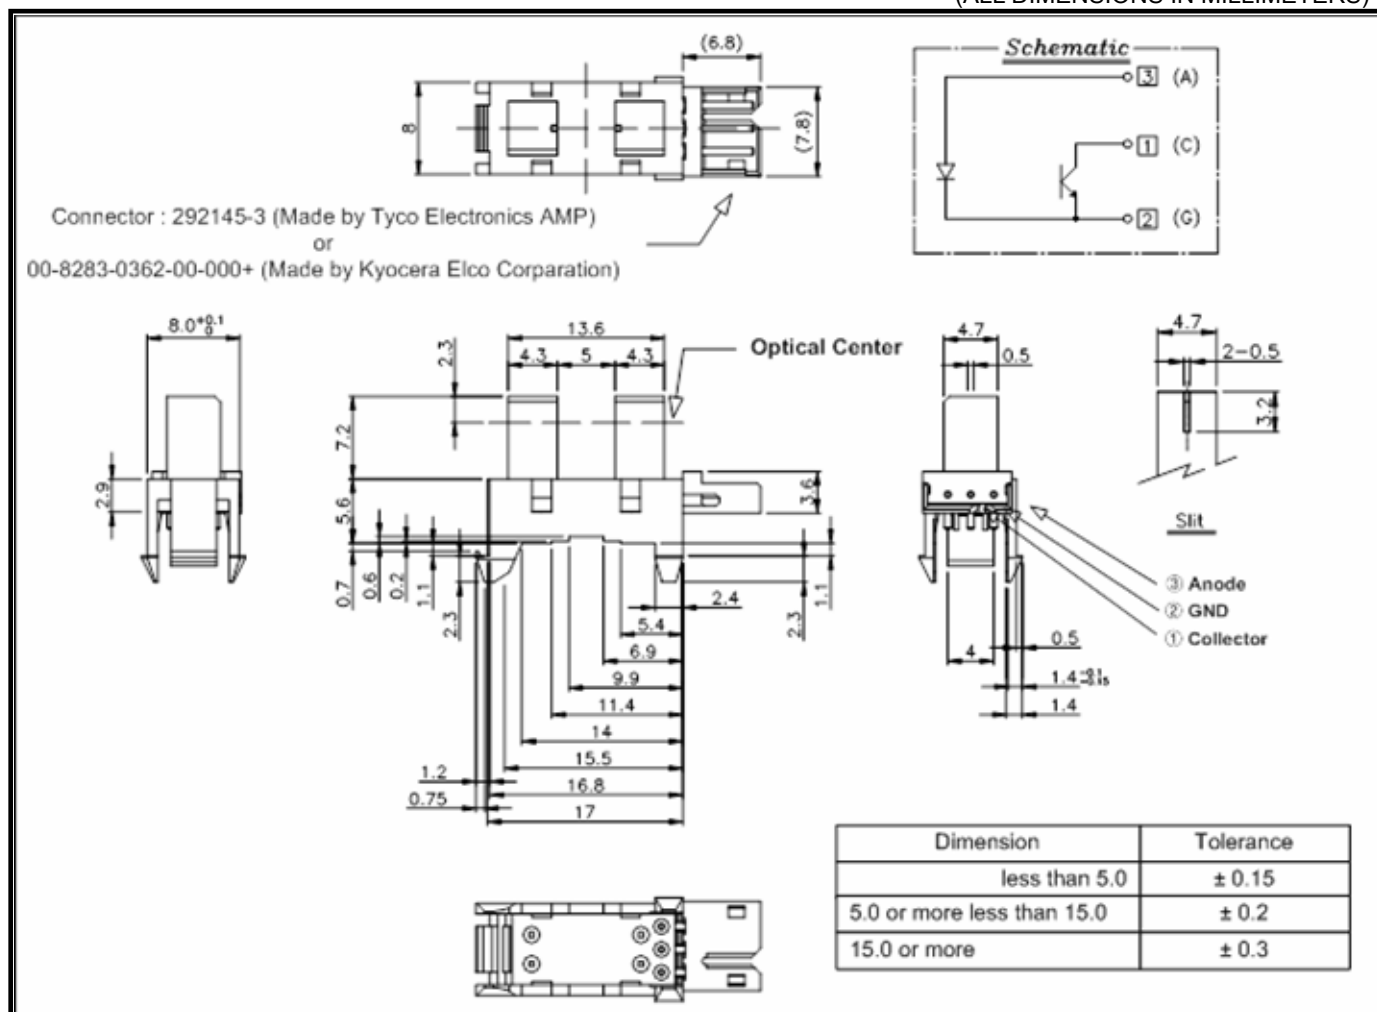

The contents of this data sheet are subject to change without advance notice for the purpose of improvement.
When using this product, would you please refer to the latest specifications.