

K1526D Series
9x14 mm, 5.0 Volt, CMOS/TTL, VCXO



- Former Champion Technologies, Inc. Product
- Phase-Locked Loops (PLL's), Clock Recovery, Reference Signal Tracking, Synthesizers, Frequency Modulation/Demodulation

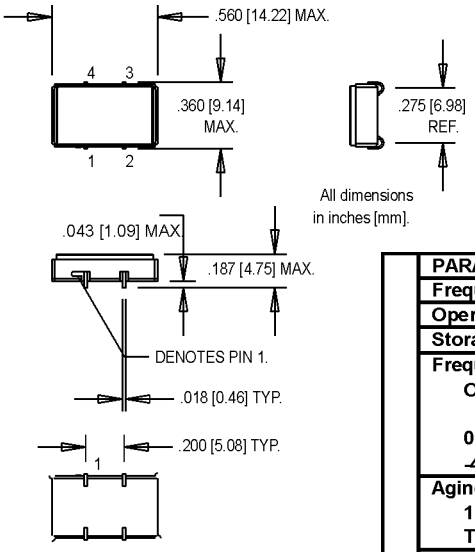

SUGGESTED SOLDER PAD LAYOUT



Ordering Information

K1526D X X -R 00.0000 MHz

- Product Series
- Model Selection
  - A: ±100 - ±150 ppm Pull*
  - D: ±80 - ±130 ppm Pull*
- Temperature Range
  - Blank: 0°C to +70°C
  - M: -40°C to +85°C
- RoHS Compliance
  - Blank: non-RoHS compliant part
  - -R: RoHS compliant part
- Frequency (customer specified)

* Above 40 MHz, pull is ±100 ppm or ±80 ppm minimum (no maximum)

Pin Connections


PIN	FUNCTION
1	Voltage Control
2	Ground & Gnd Plane
3	Output
4	+Vdd

	PARAMETER	Symbol	Min.	Typ.	Max.	Units	Condition/Notes
Electrical Specifications	Frequency Range	F	2		40	MHz	
	Operating Temperature	T_A	(See ordering information)				
	Storage Temperature	T_S	-40		+125	°C	
	Frequency Stability	ΔF/F					
	Overall		Inclusive of Calibration, Temperature, Voltage, Load, and Aging				
	0°C to +70°C				±25	ppm	
	-40°C to +85°C				±50	ppm	
	Aging						
	1st Year		-3		+3	ppm	
	Thereafter (per year)		-1		+1	ppm	
	Pullability/APR		(See ordering information)				
	Control Voltage	Vc	0.5	2.5	4.5	V	
	Linearity						Positive Monotonic Slope
	2.000 to 33.000 MHz				5	%	
	33.001 to 160.000 MHz				10	%	
	Modulation Bandwidth	fm	20			KHz	±3dB
	Input Impedance	Zin	50k			Ohms	@ 10 kHz
	Input Voltage	Vdd	4.5	5.0	5.5	V	
	Input Current	Idd			26	mA	
	Output Type						HCMOS/TTL
	Load		5 TTL or 15 pF HCMOS				See Note 1
	Symmetry (Duty Cycle)						See Note 2
	TTL & CMOS < 33 MHz		45		55	%	
	CMOS ≥ 33 MHz		40		60	%	
	Logic "1" Level	Voh	4.5			V	
	Logic "0" Level	Vol			0.5	V	
	Output Current				±16	mA	
	Rise/Fall Time	Tr/Tf			4	ns	
	Start up Time				10	ms	
	Phase Jitter @ 26 MHz	ϕJ		4		ps RMS	Integrated 12 kHz – 20 MHz
	Phase Noise (Typical)	10 Hz	100 Hz	1 kHz	10 kHz	100 kHz	Offset from carrier
	@ 26 MHz	-65	-95	-115	-130	-140	dBc/Hz
Environmental	Mechanical Shock	Per MIL-STD-202, Method 213, Condition C (100 g's, 6 mS duration, ½ sinewave)					
	Vibration	Per MIL-STD-202, Method 201 & 204 (10 g's from 10-2000 Hz)					
	Hermeticity	Per MIL-STD-202, Method 112, (1x10-8 atm. cc/s of Helium)					
	Thermal Cycle	Per MIL-STD-883, Method 1010, Condition B (-55°C to +125°C, 15 min. dwell, 10 cycles)					
	Solderability	Per EIAJ-STD-002					

1. TTL load – see load circuit diagram #1. HCMOS load – see load circuit diagram #2.
2. Symmetry is measured at 1.4 V with TTL load, and at 50% Vdd with HCMOS load.

MtronPTI reserves the right to make changes to the product(s) and service(s) described herein without notice. No liability is assumed as a result of their use or application.

MtronPTI Lead Free Solder Profile

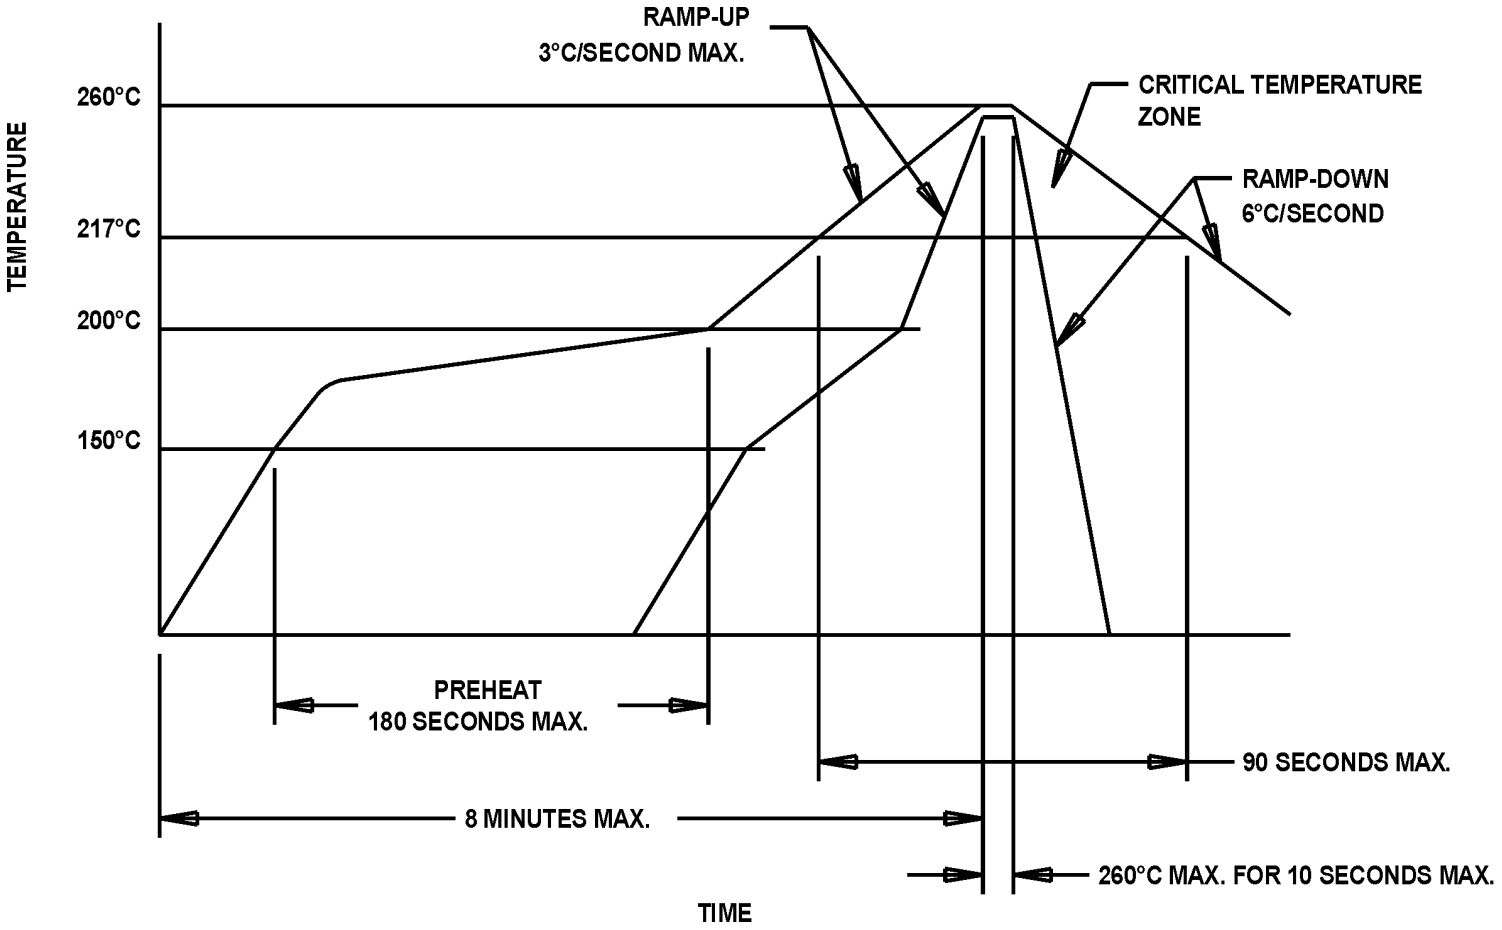

MtronPTI reserves the right to make changes to the product(s) and service(s) described herein without notice. No liability is assumed as a result of their use or application.

Please see **www.mtronpti.com** for our complete offering and detailed datasheets. Contact us for your application specific requirements: MtronPTI **1-800-762-8800.**