
REV	DATE	ECO#
A	05/07/93	1258

DRAWING NOT TO SCALE
ALL DIMENSIONS IN INCHES

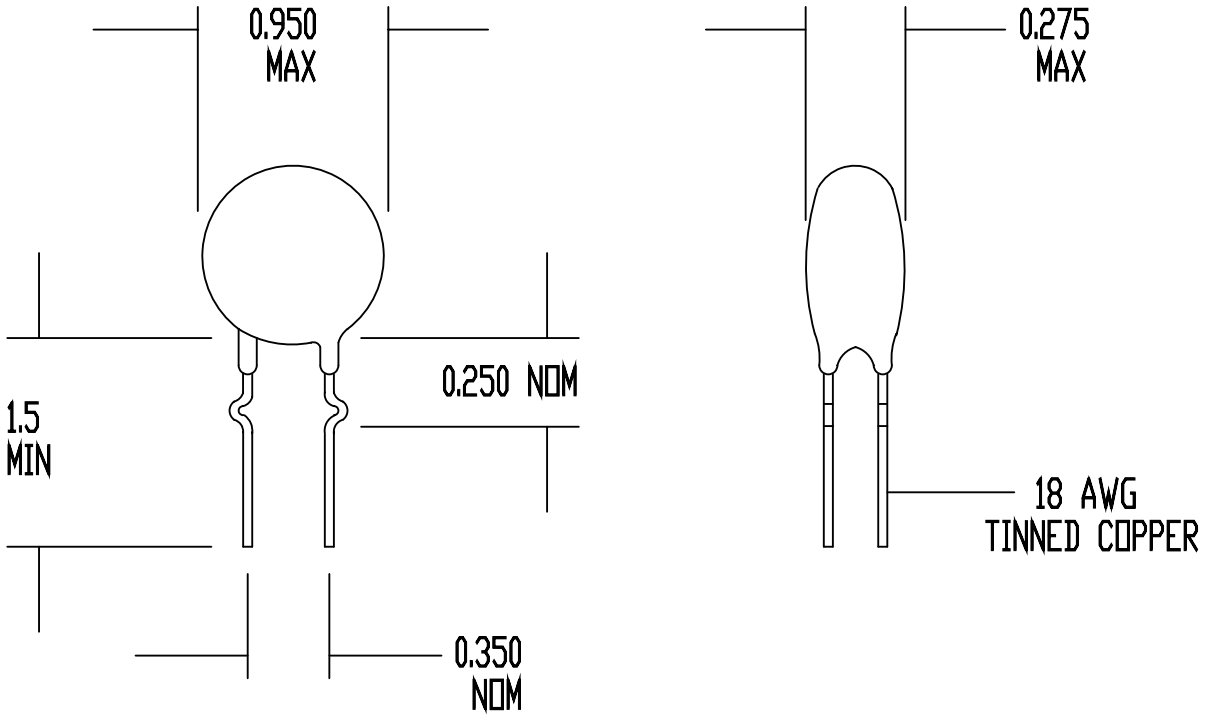

SPECIFICATIONS:

RESISTANCE AT 25 DEG C = 7 OHMS +/- 15%
MAXIMUM CONTINUOUS CURRENT (Imax) = 10 AMPS
RESISTANCE AT Imax = 0.08 OHMS NOMINAL
MAXIMUM VOLTAGE RATING = 265 VAC (RMS)
MAXIMUM SURGE RATING = 100 JOULES
ENCAPSULATION = SILICONE RESIN
MARKING = OPTIONAL
LEADS = RODAN P/N STL-209-45

DRAWN BY D. NGUYEN		AMETHERM Circuit Protection Thermistors
DATE 11/05/90	ORIG. F.T.	
REV A	APP	SURGE-GARD INRUSH CURRENT LIMITER
SHEET 1 OF 1		SG336