
This document was generated on 03/22/2010

# PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

**Part Number:** 0026481073

**Status:** Active

**Description:** 3.96mm (.156") Pitch KK® Header, Breakaway, Vertical, Polarizing Wall, 7 Circuits, Tin (Sn) Plating



*Series image - Reference only*

**Documents:**

3D Model
Packaging Specification (PDF)
Drawing (PDF)
Product Specification PS-08-50 (PDF)
RoHS Certificate of Compliance (PDF)

## Agency Certification

| | |
|---|---|
| CSA | LR19980 |
| UL | E29179 |

## General

| | |
|---|---|
| Product Family | PCB Headers |
| Series | 41681 |
| Application | Wire-to-Board |
| Product Name | KK® |

## Physical

| | |
|---|---|
| Breakaway | Yes |
| Circuits (Loaded) | 7 |
| Circuits (maximum) | 7 |
| Color - Resin | Black |
| Durability (mating cycles max) | 25 |
| Flammability | 94V-0 |
| Glow-Wire Compliant | No |
| Lock to Mating Part | None |
| Material - Metal | Brass |
| Material - Plating Mating | Tin |
| Material - Plating Termination | Tin |
| Material - Resin | Polyester |
| Number of Rows | 1 |
| Orientation | Vertical |
| PC Tail Length (in) | 0.172 In |
| PC Tail Length (mm) | 4.37 mm |
| PCB Locator | No |
| PCB Retention | None |
| PCB Thickness Recommended (in) | 0.062 In |
| PCB Thickness Recommended (mm) | 1.60 mm |
| Packaging Type | Bag |
| Pitch - Mating Interface (in) | 0.156 In |
| Pitch - Mating Interface (mm) | 3.96 mm |
| Plating min: Mating (µin) | 200 |
| Plating min: Mating (µm) | 5 |
| Plating min: Termination (µin) | 200 |
| Plating min: Termination (µm) | 5 |
| Polarized to Mating Part | No |
| Polarized to PCB | No |
| Shrouded | No |
| Stackable | No |
| Temperature Range - Operating | 0°C to +75°C |
| Termination Interface: Style | Through Hole |

## Electrical

**EU RoHS**
ELV and RoHS Compliant
**REACH SVHC**
Not Reviewed
**Halogen-Free Status**
Not Reviewed

**China RoHS**

**Need more information on product environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, click here

Please visit the Contact Us section for any non-product compliance questions.

**Search Parts in this Series**
41681Series

**Mates With**
3069 , 2139 , 2145 , 6442 , 7674 , 7675 , 41695 , L ink:41815

| | |
|---|---|
| Current - Maximum per Contact | 7A |
| Voltage - Maximum | 250V |

## Solder Process Data

| | |
|---|---|
| Lead-free Process Capability | Wave Capable (TH only) |

## Material Info


| | |
|---|---|
| Old Part Number | 41681A07A102 |


## Reference - Drawing Numbers

| | |
|---|---|
| Product Specification | PS-08-50 |
| Sales Drawing | SD-41681-001 |

This document was generated on 03/22/2010


**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

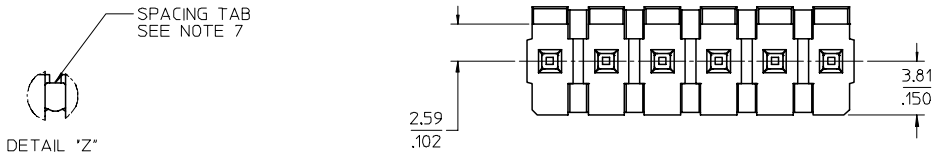


PCB LAYOUT:COMPONENT SIDE
RECOMMENDED PCB THICKNESS:
1.57±0.18/.062±.007


| CIRCUIT | A | B |
|---|---|---|
| 2 | 6.78/7.87<br>.267/.310 | 3.96<br>.156 |
| 3 | 10.74/11.84<br>.423/.466 | 7.92<br>.312 |
| 4 | 14.71/15.80<br>.579/.622 | 11.89<br>.468 |
| 5 | 18.67/19.76<br>.735/.778 | 15.85<br>.624 |
| 6 | 22.63/23.72<br>.891/.934 | 19.81<br>.780 |
| 7 | 26.59/27.69<br>1.047/1.090 | 23.77<br>.936 |
| 8 | 30.56/31.65<br>1.203/1.246 | 27.74<br>1.092 |
| 9 | 34.52/35.61<br>1.359/1.402 | 31.70<br>1.248 |
| 10 | 38.48/39.57<br>1.515/1.558 | 35.66<br>1.404 |
| 11 | 42.44/43.54<br>1.671/1.714 | 39.62<br>1.560 |
| 12 | 46.41/47.50<br>1.827/1.870 | 43.59<br>1.716 |
| 13 | 50.37/51.46<br>1.983/2.026 | 47.55<br>1.872 |
| 14 | 54.33/55.42<br>2.139/2.182 | 51.51<br>2.028 |
| 15 | 58.29/59.39<br>2.295/2.338 | 55.47<br>2.184 |
| 16 | 62.26/63.35<br>2.451/2.494 | 59.44<br>2.340 |
| 17 | 66.22/67.31<br>2.607/2.650 | 63.40<br>2.496 |
| 18 | 70.18/71.27<br>2.763/2.806 | 67.36<br>2.652 |
| 19 | 74.14/75.23<br>2.919/2.962 | 71.32<br>2.808 |
| 20 | 78.11/79.20<br>3.075/3.118 | 75.29<br>2.964 |
| 21 | 82.07/83.16<br>3.231/3.274 | 79.25<br>3.120 |
| 22 | 86.03/87.12<br>3.387/3.430 | 83.21<br>3.276 |
| 23 | 89.94/91.08<br>3.541/3.586 | 87.17<br>3.432 |
| 24 | 93.85/95.00<br>3.695/3.740 | 91.14<br>3.588 |

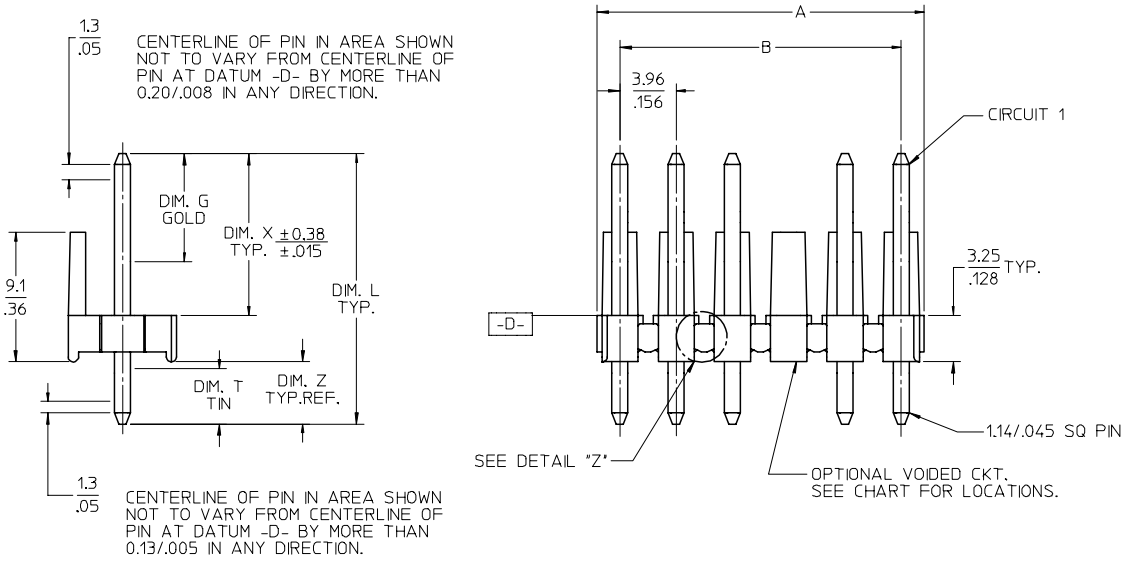


NOTES:
1. MATERIAL: HEADER: GLASS FILLED POLYESTER, 94V-0, MOLDED BLACK
   PINS- BRASS
2. FINISH:
   (102) = OVERALL TIN: (0.00508)/.000200 MIN.
   OVERALL COPPER UNDERCOAT: (0.00254)/.000100 MIN.
   (208) = SELECT GOLD: (0.00038)/.000015 MIN. OVER
   SELECT TIN: (0.00254)/.000100 MIN. OVER
   NICKEL OVERALL: (0.000127)/.000050 MIN.
   (228) = SELECT GOLD: (0.00076)/.000030 MIN.
   SELECT TIN: (0.00254)/.000100 MIN.
   OVER NICKEL OVERALL: (0.00127)/.000050 MIN.
   (501) = OVERALL GOLD: (0.00051)/.000020 MIN.
   OVER NICKEL OVERALL: (0.00076)/.000030 MIN.
   (503) = OVERALL GOLD: (0.00076)/.000030 MIN.
   OVER NICKEL OVERALL: (0.00127)/.000050 MIN.

   * THE PRIMARY SHIPPING CARTON WILL BE LABELD "COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC". CARTONS WITHOUT MAY CONTAIN PRODUCT WITH TIN/LEAD PLATINGS.

3. PRODUCT SPECIFICATION: PS-08-50.
4. PACKAGING: SEE CHART
5. SOLDERABILITY: PER SMES-152.
6. PIN PUSH-OUT FORCE: PRIOR TO SOLDERING, A 3 LB. MINIMUM FORCE IN EITHER DIRECTION SHALL BE REQUIRED TO PUSH THE PIN OUT OF THE HEADER.
7. PARTS ARE STACKABLE END TO END ON 3.96/.156 CENTERS. (SPACING TABS MUST BE REMOVED ON CIRCUIT SIZES 1-23 BEFORE PARTS ARE STACKABLE.)

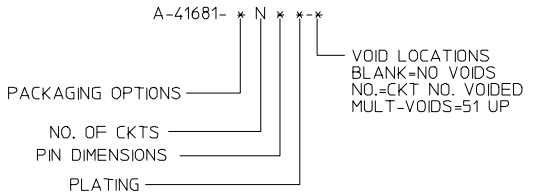


| 2-* | S2 |
|---|---|
| 1 | S2 |
| SHT. | REV. |

REVISED / REDRAWN
EC NO: UCP2006-2983 2006/08/02
DRWN:PRIDDER 2006/08/03
CHKD:ADERR 2006/08/04
APPR:FSMITH
DESCRIPTION
REV
S2

QUALITY SYMBOLS
▼=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

| | mm | INCH |
|---|---|---|
| 4 PLACES | ± --- | ± --- |
| 3 PLACES | ± --- | ± .006 |
| 2 PLACES | ± 0.15 | ± .010 |
| 1 PLACE | ± 0.25 | ± --- |
| ANGULAR ±1/2° | | |

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM/IN
SCALE: 4:1
DESIGN UNITS: INCH
THIRD ANGLE PROJECTION

| | | |
|---|---|---|
| DRAWN BY | SAMIEC | DATE 08/09/85 |
| CHECKED BY | PATEL | DATE 08/09/85 |
| APPROVED BY | LENZ | DATE 08/09/85 |

TITLE: KK .156 HEADER ASSEMBLY POLARIZING STRAIGHT 2-24 CKTS.

MOLEX INCORPORATED

MATERIAL NO.: SEE CHART
DOCUMENT NO.: SD-41681-001
SHEET NO.: 1 OF *

SIZE C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

| ENG. NO: A-41681-ANA102-* | |
|---|---|
| PIN NUMBER | 2161-1(102) |
| PLATING | 102 |
| DIM. L | (19.05)/.750 |
| DIM. X | (11.43)/.450 |
| DIM. G (GOLD) | N/A |
| DIM. Z | (4.37)/.172 |
| DIM. T (TIN) | OVERALL |
| PACKAGING | PK-41681-001 (BULK) |

| CKTS | EDP NO. | ENG. NO. | VOIDS |
|---|---|---|---|
| 02 | 26-48-1023 | A-41681-A2A102 | |
| 03 | 26-48-1033 | A-41681-A3A102 | |
| 04 | 26-48-1043 | A-41681-A4A102 | |
| 05 | 26-48-1053 | A-41681-A5A102 | |
| 06 | 26-48-1063 | A-41681-A6A102 | |
| 07 | 26-48-1073 | A-41681-A7A102 | |
| 08 | 26-48-1083 | A-41681-A8A102 | |
| 09 | 26-48-1093 | A-41681-A9A102 | |
| 10 | 26-48-1103 | A-41681-A10A102 | |
| 11 | 26-48-1113 | A-41681-A11A102 | |
| 12 | 26-48-1123 | A-41681-A12A102 | |
| 13 | 26-48-1133 | A-41681-A13A102 | |
| 14 | 26-48-1143 | A-41681-A14A102 | |
| 15 | 26-48-1153 | A-41681-A15A102 | |
| 16 | 26-48-1163 | A-41681-A16A102 | |
| 17 | 26-48-1173 | A-41681-A17A102 | |
| 18 | 26-48-1183 | A-41681-A18A102 | |
| 19 | 26-48-1193 | A-41681-A19A102 | |
| 20 | 26-48-1203 | A-41681-A20A102 | |
| 21 | 26-48-1213 | A-41681-A21A102 | |
| 22 | 26-48-1223 | A-41681-A22A102 | |
| 23 | 26-48-1233 | A-41681-A23A102 | |
| 24 | 26-48-1243 | A-41681-A24A102 | |
| 13 | 26-49-6137 | A-41681-A13A102-12 | 12 |
| 17 | 26-49-6177 | A-41681-A17A102-2 | 2 |
| 20 | 26-49-6207 | A-41681-A20A102-17 | 17 |

| ENG. NO: A-41681-ANA501-* | |
|---|---|
| PIN NUMBER | 2161-1(501) |
| PLATING | 501 |
| DIM. L | (19.05)/.750 |
| DIM. X | (11.43)/.450 |
| DIM. G (GOLD) | OVERALL |
| DIM. Z | (4.37)/.172 |
| DIM. T (TIN) | N/A |
| PACKAGING | PK-41681-001 (BULK) |

| CKTS | EDP NO. | ENG. NO. | VOIDS |
|---|---|---|---|
| 02 | 26-48-2023 | A-41681-A2A501 | |
| 03 | 26-48-2033 | A-41681-A3A501 | |
| 04 | 26-48-2043 | A-41681-A4A501 | |
| 05 | 26-48-2053 | A-41681-A5A501 | |
| 06 | 26-48-2063 | A-41681-A6A501 | |
| 07 | 26-48-2073 | A-41681-A7A501 | |
| 08 | 26-48-2083 | A-41681-A8A501 | |
| 09 | 26-48-2093 | A-41681-A9A501 | |
| 10 | 26-48-2103 | A-41681-A10A501 | |
| 11 | 26-48-2113 | A-41681-A11A501 | |
| 12 | 26-48-2123 | A-41681-A12A501 | |
| 13 | 26-48-2133 | A-41681-A13A501 | |
| 14 | 26-48-2143 | A-41681-A14A501 | |
| 15 | 26-48-2153 | A-41681-A15A501 | |
| 16 | 26-48-2163 | A-41681-A16A501 | |
| 17 | 26-48-2173 | A-41681-A17A501 | |
| 18 | 26-48-2183 | A-41681-A18A501 | |
| 19 | 26-48-2193 | A-41681-A19A501 | |
| 20 | 26-48-2203 | A-41681-A20A501 | |
| 21 | 26-48-2213 | A-41681-A21A501 | |
| 22 | 26-48-2223 | A-41681-A22A501 | |
| 23 | 26-48-2233 | A-41681-A23A501 | |
| 24 | 26-48-2243 | A-41681-A24A501 | |

| ENG. NO: A-41681-ANC102-* | |
|---|---|
| PIN NUMBER | 2161-56(102) |
| PLATING | 102 |
| DIM. L | (17.86)/.703 |
| DIM. X | (11.43)/.450 |
| DIM. G (GOLD) | N/A |
| DIM. Z | (3.18)/.125 |
| DIM. T (TIN) | OVERALL |
| PACKAGING | PK-41681-001 (BULK) |

| CKTS | EDP NO. | ENG. NO. | VOIDS |
|---|---|---|---|
| 02 | 26-48-7025 | A-41681-A2C102 | |
| 03 | 26-48-7035 | A-41681-A3C102 | |
| 04 | 26-48-7045 | A-41681-A4C102 | |
| 05 | 26-48-7055 | A-41681-A5C102 | |
| 06 | 26-48-7065 | A-41681-A6C102 | |
| 07 | 26-48-7075 | A-41681-A7C102 | |
| 08 | 26-48-7085 | A-41681-A8C102 | |
| 09 | 26-48-7095 | A-41681-A9C102 | |
| 10 | 26-48-7105 | A-41681-A10C102 | |
| 11 | 26-48-7115 | A-41681-A11C102 | |
| 12 | 26-48-7125 | A-41681-A12C102 | |
| 13 | 26-48-7135 | A-41681-A13C102 | |
| 14 | 26-48-7145 | A-41681-A14C102 | |
| 15 | 26-48-7155 | A-41681-A15C102 | |
| 16 | 26-48-7165 | A-41681-A16C102 | |
| 17 | 26-48-7175 | A-41681-A17C102 | |
| 18 | 26-48-7185 | A-41681-A18C102 | |
| 19 | 26-48-7195 | A-41681-A19C102 | |
| 20 | 26-48-7205 | A-41681-A20C102 | |
| 21 | 26-48-7215 | A-41681-A21C102 | |
| 22 | 26-48-7225 | A-41681-A22C102 | |
| 23 | 26-48-7235 | A-41681-A23C102 | |
| 24 | 26-48-7245 | A-41681-A24C102 | |

| REV: | ECR/ECN INFORMATION | TITLE: | SHEET No. |
|---|---|---|---|
| **S2** | EC No: **UCP2006-2983**<br>DATE: **2006-06-13** | KK .156 HEADER ASSEMBLY<br>POLARIZING STRAIGHT<br>2-24 CKTS | **- 2 -** |

| DOCUMENT NUMBER: | CREATED / REVISED BY: | CHECKED BY: | APPROVED BY: |
|---|---|---|---|
| **SD-41681-001** | **PRIDDER** | **ADERR** | **FSMITH** |

| ENG. NO: A-41681-ANC503-* | |
|---|---|
| PIN NUMBER | 2161-56(503) |
| PLATING | 503 |
| DIM. L | (17.86)/.703 |
| DIM. X | (11.43)/.450 |
| DIM. G (GOLD) | OVERALL |
| DIM. Z | (3.18)/.125 |
| DIM. T (TIN) | N/A |
| PACKAGING | PK-41681-001 (BULK) |

| CKTS | EDP NO. | ENG. NO. | VOIDS |
|---|---|---|---|
| 02 | 26-48-7028 | A-41681-A2C503 | |
| 03 | 26-48-7038 | A-41681-A3C503 | |
| 04 | 26-48-7048 | A-41681-A4C503 | |
| 05 | 26-48-7058 | A-41681-A5C503 | |
| 06 | 26-48-7068 | A-41681-A6C503 | |
| 07 | 26-48-7078 | A-41681-A7C503 | |
| 08 | 26-48-7088 | A-41681-A8C503 | |
| 09 | 26-48-7098 | A-41681-A9C503 | |
| 10 | 26-48-7108 | A-41681-A10C503 | |
| 11 | 26-48-7118 | A-41681-A11C503 | |
| 12 | 26-48-7128 | A-41681-A12C503 | |
| 13 | 26-48-7138 | A-41681-A13C503 | |
| 14 | 26-48-7148 | A-41681-A14C503 | |
| 15 | 26-48-7158 | A-41681-A15C503 | |
| 16 | 26-48-7168 | A-41681-A16C503 | |
| 17 | 26-48-7178 | A-41681-A17C503 | |
| 18 | 26-48-7188 | A-41681-A18C503 | |
| 19 | 26-48-7198 | A-41681-A19C503 | |
| 20 | 26-48-7208 | A-41681-A20C503 | |
| 21 | 26-48-7218 | A-41681-A21C503 | |
| 22 | 26-48-7228 | A-41681-A22C503 | |
| 23 | 26-48-7238 | A-41681-A23C503 | |
| 24 | 26-48-7248 | A-41681-A24C503 | |
| | | | |
| | | | |
| | | | |

| ENG. NO: A-41681-BNA208-* | |
|---|---|
| PIN NUMBER | 43294-0236 |
| PLATING | 208 |
| DIM. L | (19.05)/.750 |
| DIM. X | (11.43)/.450 |
| DIM. G (GOLD) | (6.86)/.270 |
| DIM. Z | (4.37)/.172 |
| DIM. T (TIN) | (4.06)/.160 |
| PACKAGING | PK-41681-001 (BULK) |

| CKTS | EDP NO. | ENG. NO. | VOIDS |
|---|---|---|---|
| 02 | 41681-0001 | A-41681-B02A208 | |
| 03 | 41681-0002 | A-41681-B03A208 | |
| 04 | 41681-0003 | A-41681-B04A208 | |
| 05 | 41681-0004 | A-41681-B05A208 | |
| 06 | 41681-0005 | A-41681-B06A208 | |
| 07 | 41681-0006 | A-41681-B07A208 | |
| 08 | 41681-0007 | A-41681-B08A208 | |
| 09 | 41681-0008 | A-41681-B09A208 | |
| 10 | 41681-0009 | A-41681-B10A208 | |
| 11 | 41681-0010 | A-41681-B11A208 | |
| 12 | 41681-0011 | A-41681-B12A208 | |
| 13 | 41681-0012 | A-41681-B13A208 | |
| 14 | 41681-0013 | A-41681-B14A208 | |
| 15 | 41681-0014 | A-41681-B15A208 | |
| 16 | 41681-0015 | A-41681-B16A208 | |
| 17 | 41681-0016 | A-41681-B17A208 | |
| 18 | 41681-0017 | A-41681-B18A208 | |
| 19 | 41681-0018 | A-41681-B19A208 | |
| 20 | 41681-0019 | A-41681-B20A208 | |
| 21 | 41681-0020 | A-41681-B21A208 | |
| 22 | 41681-0021 | A-41681-B22A208 | |
| 23 | 41681-0022 | A-41681-B23A208 | |
| 24 | 41681-0023 | A-41681-B24A208 | |
| | | | |
| | | | |
| | | | |

| ENG. NO: A-41681-BNA228-* | |
|---|---|
| PIN NUMBER | 43294-0237 |
| PLATING | 228 |
| DIM. L | (19.05)/.750 |
| DIM. X | (11.43)/.450 |
| DIM. G (GOLD) | (6.86)/.270 |
| DIM. Z | (4.37)/.172 |
| DIM. T (TIN) | (4.06)/.160 |
| PACKAGING | PK-41681-001 (BULK) |

| CKTS | EDP NO. | ENG. NO. | VOIDS |
|---|---|---|---|
| 02 | 41681-0024 | A-41681-B02A228 | |
| 03 | 41681-0025 | A-41681-B03A228 | |
| 04 | 41681-0026 | A-41681-B04A228 | |
| 05 | 41681-0027 | A-41681-B05A228 | |
| 06 | 41681-0028 | A-41681-B06A228 | |
| 07 | 41681-0029 | A-41681-B07A228 | |
| 08 | 41681-0030 | A-41681-B08A228 | |
| 09 | 41681-0031 | A-41681-B09A228 | |
| 10 | 41681-0032 | A-41681-B10A228 | |
| 11 | 41681-0033 | A-41681-B11A228 | |
| 12 | 41681-0034 | A-41681-B12A228 | |
| 13 | 41681-0035 | A-41681-B13A228 | |
| 14 | 41681-0036 | A-41681-B14A228 | |
| 15 | 41681-0037 | A-41681-B15A228 | |
| 16 | 41681-0038 | A-41681-B16A228 | |
| 17 | 41681-0039 | A-41681-B17A228 | |
| 18 | 41681-0040 | A-41681-B18A228 | |
| 19 | 41681-0041 | A-41681-B19A228 | |
| 20 | 41681-0042 | A-41681-B20A228 | |
| 21 | 41681-0043 | A-41681-B21A228 | |
| 22 | 41681-0044 | A-41681-B22A228 | |
| 23 | 41681-0045 | A-41681-B23A228 | |
| 24 | 41681-0046 | A-41681-B24A228 | |
| | | | |
| | | | |
| | | | |

| REV: | ECR/ECN INFORMATION | TITLE: | SHEET No. |
|---|---|---|---|
| **S2** | EC No: **UCP2006-2983**<br>DATE: **2006-06-13** | KK .156 HEADER ASSEMBLY<br>POLARIZING STRAIGHT<br>2-24 CKTS | **- 3 -** |

| DOCUMENT NUMBER: | CREATED / REVISED BY: | CHECKED BY: | APPROVED BY: |
|---|---|---|---|
| **SD-41681-001** | **PRIDDER** | **ADERR** | **FSMITH** |

| ENG. NO: A-41681-ANB102-* | |
|---|---|
| PIN NUMBER | 2161-1(102) |
| PLATING | 102 |
| DIM. L | (19.05)/.750 |
| DIM. X | (12.62)/.497 |
| DIM. G (GOLD) | N/A |
| DIM. Z | (3.18)/.125 |
| DIM. T (TIN) | OVERALL |
| PACKAGING | PK-41681-001 (BULK) |

| CKTS | EDP NO. | ENG. NO. | VOIDS |
|---|---|---|---|
| 02 | 41681-0047 | A-41681-A2B102 | |
| 03 | 41681-0048 | A-41681-A3B102 | |
| 04 | 41681-0049 | A-41681-A4B102 | |
| 05 | 41681-0050 | A-41681-A5B102 | |
| 06 | 41681-0051 | A-41681-A6B102 | |
| 07 | 41681-0052 | A-41681-A7B102 | |
| 08 | 41681-0053 | A-41681-A8B102 | |
| 09 | 41681-0054 | A-41681-A9B102 | |
| 10 | 41681-0055 | A-41681-A10B102 | |
| 11 | 41681-0056 | A-41681-A11B102 | |
| 12 | 41681-0057 | A-41681-A12B102 | |
| 13 | 41681-0058 | A-41681-A13B102 | |
| 14 | 41681-0059 | A-41681-A14B102 | |
| 15 | 41681-0060 | A-41681-A15B102 | |
| 16 | 41681-0061 | A-41681-A16B102 | |
| 17 | 41681-0062 | A-41681-A17B102 | |
| 18 | 41681-0063 | A-41681-A18B102 | |
| 19 | 41681-0064 | A-41681-A19B102 | |
| 20 | 41681-0065 | A-41681-A20B102 | |
| 21 | 41681-0066 | A-41681-A21B102 | |
| 22 | 41681-0067 | A-41681-A22B102 | |
| 23 | 41681-0068 | A-41681-A23B102 | |
| 24 | 26-48-6248 | A-41681-A24B102 | |
| | | | |
| | | | |

| ENG. NO | |
|---|---|
| PIN NUMBER | |
| PLATING | |
| DIM. L | |
| DIM. X | |
| DIM. G (GOLD) | |
| DIM. Z | |
| DIM. T (TIN) | |
| PACKAGING | PK-41681-001 (BULK) |

| CKTS | EDP NO. | ENG. NO. | VOIDS |
|---|---|---|---|
| 02 | | | |
| 03 | | | |
| 04 | | | |
| 05 | | | |
| 06 | | | |
| 07 | | | |
| 08 | | | |
| 09 | | | |
| 10 | | | |
| 11 | | | |
| 12 | | | |
| 13 | | | |
| 14 | | | |
| 15 | | | |
| 16 | | | |
| 17 | | | |
| 18 | | | |
| 19 | | | |
| 20 | | | |
| 21 | | | |
| 22 | | | |
| 23 | | | |
| 24 | | | |
| | | | |
| | | | |

| ENG. NO | |
|---|---|
| PIN NUMBER | |
| PLATING | |
| DIM. L | |
| DIM. X | |
| DIM. G (GOLD) | |
| DIM. Z | |
| DIM. T (TIN) | |
| PACKAGING | PK-41681-001 (BULK) |

| CKTS | EDP NO. | ENG. NO. | VOIDS |
|---|---|---|---|
| 02 | | | |
| 03 | | | |
| 04 | | | |
| 05 | | | |
| 06 | | | |
| 07 | | | |
| 08 | | | |
| 09 | | | |
| 10 | | | |
| 11 | | | |
| 12 | | | |
| 13 | | | |
| 14 | | | |
| 15 | | | |
| 16 | | | |
| 17 | | | |
| 18 | | | |
| 19 | | | |
| 20 | | | |
| 21 | | | |
| 22 | | | |
| 23 | | | |
| 24 | | | |
| | | | |
| | | | |

| REV: | ECR/ECN INFORMATION | TITLE: | SHEET No. |
|---|---|---|---|
| **S2** | EC No: **UCP2006-2983**<br>DATE: **2006-06-13** | KK .156 HEADER ASSEMBLY<br>POLARIZING STRAIGHT<br>2-24 CKTS | **- 4 -** |

| DOCUMENT NUMBER: | CREATED / REVISED BY: | CHECKED BY: | APPROVED BY: |
|---|---|---|---|
| **SD-41681-001** | **PRIDDER** | **ADERR** | **FSMITH** |