




AC Crossaxial Blower

OAB40 series

Impeller: Aluminum Alloy
 Motor: AC Shaded pole
 Insulation Class: E.B.F
 Insulation Withstand: AC 1500V/1 minute
 Insulation Resistance: >100M ohm DC500V
 Operating Temp: 0C ~ +45C



Bearing: *
 Indicate "B" for Ball or "S" for Sleeve

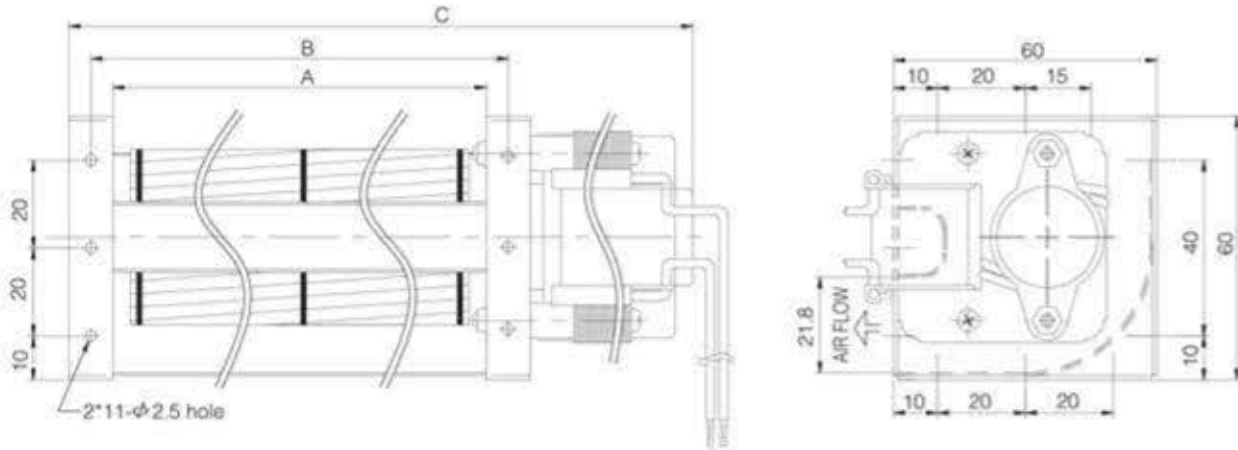

Spec. Model	Size (mm)			Rated Voltage V	Rated Frequency Hz	Rated Current A	Input Power W	Speed r.p.m.	Max Pressure mmHg	Maximum Air Flow m ³ /min	CFM	Noise dBA	Safety Approval			Weight g
	A	B	C										LU	TUV	CE	
OAB40098-11-1	98	108	160	120	50/60	0.14/0.12	10/9	2700/3000	1.7/2.3	0.6/0.7	21/24	29/33	○	○	○	520
OAB40098-22-1				230	50/60	0.09/0.07	11/9	2700/3000	1.7/2.3	0.6/0.7	21/24	29/33	○	○	○	
OAB40160-11-1	160	170	222	120	50/60	0.15/0.13	11/10	2600/2800	1.9/2.4	1.0/1.1	35/39	30/34	○	○	○	560
OAB40160-22-1				230	50/60	0.09/0.07	11/9	2600/2800	1.9/2.4	1.0/1.1	35/39	30/34	○	○	○	
OAB40198-11-1	198	208	260	120	50/60	0.15/0.13	10/9	2500/2400	2.0/2.6	1.4/1.3	49/46	33/31	○	○	○	600
OAB40198-22-1				230	50/60	0.09/0.07	12/11	2500/2400	2.0/2.6	1.4/1.3	49/46	33/31	○	○	○	
OAB40300-11-1	300	310	366	120	50/60	0.23/0.21	17/16	2400/2200	2.1/2.6	2.1/2.0	74/70	37/35	○	○	○	730
OAB40300-22-1				230	50/60	0.10/0.09	13/13	2400/2200	2.1/2.6	2.1/2.0	74/70	37/35	○	○	○	

