


# RoHS

## SPECIFICATIONS

Rated Current:3.0AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:1000V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°c to +105°c  
 Contact Material:Brass  
 Contact Plating:Au Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PA6T  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

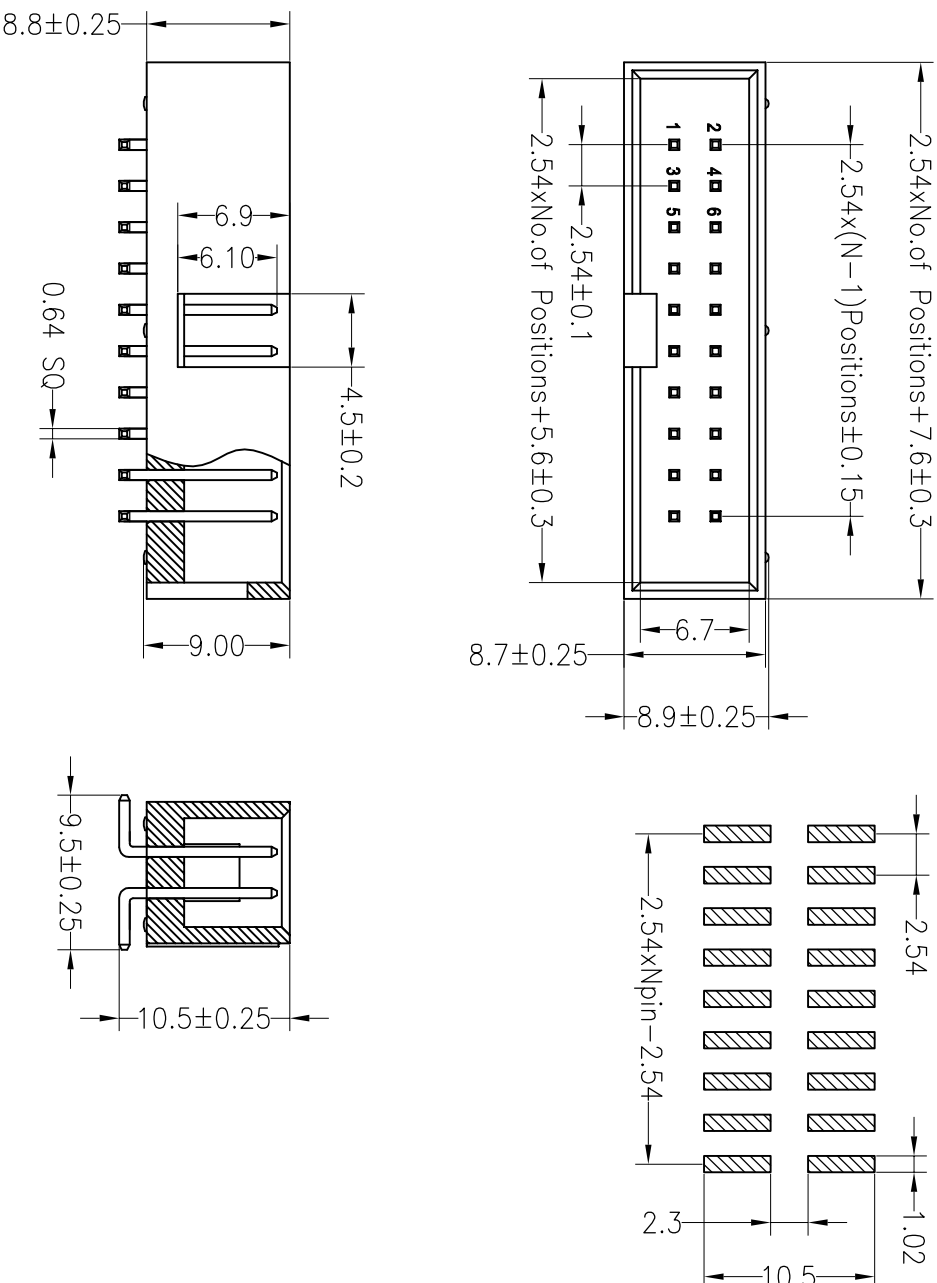

深圳市连盛精密连接器有限公司

PART NO. BH-00016---A0001

TITLE: 2.54BOX H8.8mm 30P SMT

OPERATION		DRAW		SCALE		FIT	
X.X	±0.30	Y.YuSheng	12.03.28	UNIT	mm	PROJ.	1/1
X.XX	±0.20	CHECK		SIZE	A4	SHEET	1/1
X.XXX	±0.10	APPROVE		PROJ.			
Angle	±3°						
DIM	TOL						

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
1			
2			
3			
4			
5			
6			
7			
8			
9			