



40 WATT MEDICAL POWER SUPPLIES

DESCRIPTION

The PM40AL series of compact, open PCB constructed, AC-DC switching power supplies are capable of delivering 40 watts of continuous output power. They operate at 85 to 264 VAC input voltage without the need of voltage selection. They are ideally suited for use in medical equipment, safety systems and monitoring equipment, not for patient contact.

FEATURES

- Low safety ground leakage current
- 100% burn-in
- Wide input range 85 to 264 VAC
- Input surge current protection
- Overvoltage protection
- Overcurrent protection
- Open PCB construction

INPUT SPECIFICATIONS

| | |
|--------------------------|--|
| Input voltage : | 85 to 264 VAC |
| Input frequency : | 47 to 63 Hz |
| Input current : | 1.20A (rms) for 115VAC 0.70A (rms) for 230VAC |
| Leakage current : | 150uA max. @ 230VAC, 50Hz 90 uA max. @ 115VAC, 60Hz |


OUTPUT SPECIFICATIONS

| | |
|----------------------------------|--|
| Output voltage/current : | See rating chart |
| Total output power : | 40 watts maximum |
| Ripple and noise : | 1% peak to peak maximum |
| Overvoltage protection : | Provided on output #1 only; set at 112 - 132% of its nominal output voltage |
| Overcurrent protection : | All outputs protected to short circuit conditions |
| Temperature coefficient : | All outputs $\pm 0.04\%$ / $^{\circ}\text{C}$ maximum |
| Transient response : | Maximum excursion of 4% or better on all models, recovering to 1% of final value within 500us after a 25% step load change |


ENVIRONMENTAL SPECIFICATIONS

| | |
|--------------------------------|--|
| Operating temperature : | 0 $^{\circ}\text{C}$ to +70 $^{\circ}\text{C}$ |
| Storage temperature : | -40 $^{\circ}\text{C}$ to +85 $^{\circ}\text{C}$ |
| Relative humidity : | 5% to 95% non-condensing |
| Derating : | Derate from 100% at +50 $^{\circ}\text{C}$ linearly to 50% at +70 $^{\circ}\text{C}$ |

PM40AL SERIES

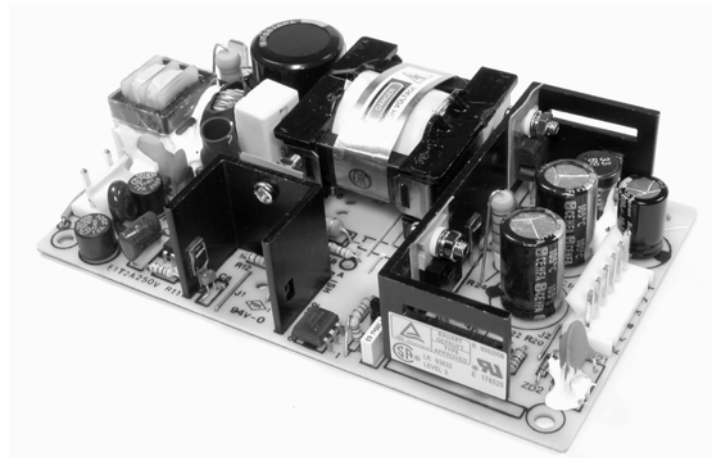

Safety Standard Approvals :

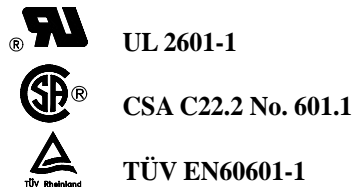

GENERAL SPECIFICATIONS

| | |
|--|---|
| Switching frequency : | 36KHz \pm 5KHz |
| Efficiency : | 70% minimum on single output models with $V_o \geq 15\text{V}$, 65% minimum on the others |
| Hold-up time : | 10 msec minimum at 110VAC |
| Line regulation : | $\pm 0.5\%$ maximum at full load |
| Inrush current : | 15 amps @ 115VAC, or 30 amps @ 230VAC, at 25 $^{\circ}\text{C}$ cold start |
| Withstand voltage : | 4000VAC from input to output 1500VAC from input to ground 500VAC from output to ground |
| MTBF : | 600,000 hours minimum at full load at 25 $^{\circ}\text{C}$ ambient, calculated per MIL-HDBK-217F |
| EMC Performance (EN60601-1-2: 2001) | |
| EN55011 | Class B conducted, class B radiated |
| FCC | Class B conducted, class B radiated |
| VCCI | Class B conducted, class B radiated |
| EN61000-3-2 | Harmonic distortion, class A and D |
| EN61000-3-3 | Line flicker |
| EN61000-4-2 | ESD, $\pm 8\text{KV}$ air and $\pm 6\text{KV}$ contact |
| EN61000-4-3 | Radiated immunity, 3V/m for 80~2500MHz |
| EN61000-4-4 | Fast transient/burst, $\pm 2\text{KV}$ |
| EN61000-4-5 | Surge, $\pm 1\text{KV}$ diff., $\pm 2\text{KV}$ com. |
| EN61000-4-6 | Conducted immunity, 3Vrms |
| EN61000-4-8 | Magnetic field immunity, 3A/m |
| EN61000-4-11 | Voltage dips, 30% reduction for 500ms, 60% reduction for 100ms and >95% reduction for 10ms |

MEDICAL GRADE

PM40AL SERIES


OUTPUT VOLTAGE/CURRENT RATING CHART

| (1)(2) Model | Output #1 | | | | Output #2 | | | | Output #3 | | | | Maximum Output Power |
|-----------------|-----------|-------|--------------------|------|-----------|-------|--------------------|------|-----------|-------|--------------------|------|----------------------------|
| | Vnom. | Imin. | I _{max} . | Tol. | Vnom. | Imin. | I _{max} . | Tol. | Vnom. | Imin. | I _{max} . | Tol. | |
| PM40-10AL | 5V | 0A | 8.0A | 2% | | | (N/A) | | | | (N/A) | | 40W |
| PM40-12AL | 12V | 0A | 3.5A | 1% | | | (N/A) | | | | (N/A) | | 40W |
| PM40-13AL | 15V | 0A | 3.0A | 1% | | | (N/A) | | | | (N/A) | | 40W |
| PM40-14AL | 24V | 0A | 2.0A | 1% | | | (N/A) | | | | (N/A) | | 40W |
| PM40-18AL | 48V | 0A | 0.9A | 1% | | | (N/A) | | | | (N/A) | | 40W |
| PM40-23AL | +5V | 0.5A | 3.0A | 3% | +12V | 0.2A | 2A | 5% | | | (N/A) | | 40W |
| PM40-24AL | +5V | 0.5A | 3.0A | 3% | +15V | 0.2A | 2A | 5% | | | (N/A) | | 40W |
| PM40-25AL | +5V | 0.5A | 3.0A | 3% | +24V | 0.1A | 1A | 5% | | | (N/A) | | 40W |
| PM40-30AL | +5V | 0.5A | 3.0A | 3% | +12V | 0.2A | 2A | 5% | -5V | 0.05A | 0.3A | 10% | 40W |
| PM40-31AL | +5V | 0.5A | 3.0A | 3% | +12V | 0.2A | 2A | 5% | -12V | 0.05A | 0.3A | 10% | 40W |
| PM40-32AL | +5V | 0.5A | 3.0A | 3% | +15V | 0.2A | 2A | 5% | -15V | 0.05A | 0.3A | 10% | 40W |
| PM40-33AL | +5V | 0.5A | 3.0A | 3% | +15V | 0.2A | 2A | 5% | -12V | 0.05A | 0.3A | 10% | 40W |
| PM40-39AL | +5V | 0.5A | 3.0A | 3% | +24V | 0.1A | 1A | 5% | -12V | 0.05A | 0.3A | 10% | 40W |

Notes: (1) All multiple output models may be operated at no-load without damage. At no-load, output voltage tolerance increases to 10%

(2) Safety agency approvals are for the above listed models in PCB format. To order a model with a metallic L-bracket or box, change suffix "AL" to "BL" for L-bracket format or to "CL" for enclosed format (mechanical details shown in page 7-1), e.g. PM40-14BL.

MECHANICAL SPECIFICATIONS

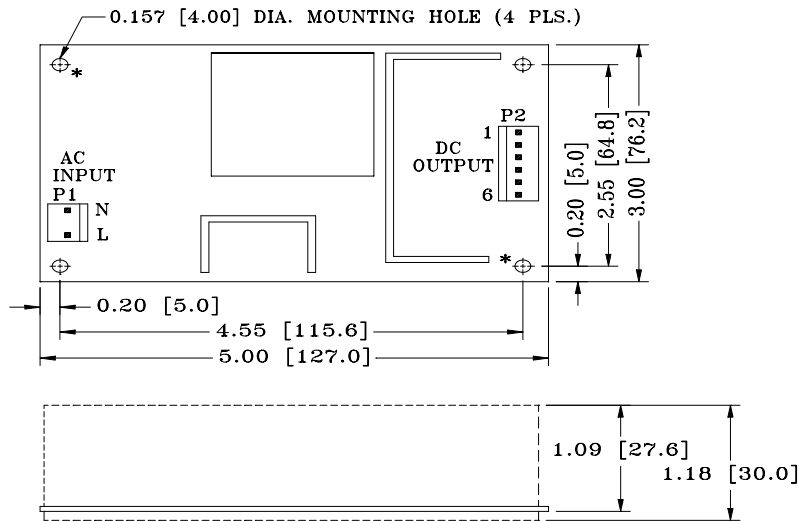

NOTES:

1. Dimensions shown in inch [mm]
2. Tolerance 0.02 [0.5] maximum
3. Input connector mates with Molex housing 09-50-3031 and Molex 2878 series crimp terminal.
4. Output connector mates with Molex housing 09-50-3061 and Molex 2878 series crimp terminal.
5. Weight: 230 grams (PCB format)
6. It's strongly recommended to connect the two "*" marked mounting holes to system chassis through metallic stand-offs. This helps reduce greatly output noise.

PIN CHART

| MODEL | PIN | 1 | 2 | 3 | 4 | 5 | 6 |
|---|-----|-----------|-----------|-----------|---------------|---------------|-----------|
| PM40-10AL PM40-12AL PM40-13AL PM40-14AL PM40-18AL | | OUTPUT #1 | OUTPUT #1 | OUTPUT #1 | RETURN | RETURN | RETURN |
| PM40-23AL PM40-24AL PM40-25AL | | OUTPUT #2 | OUTPUT #1 | OUTPUT #1 | COMMON RETURN | COMMON RETURN | N.C. |
| PM40-30AL PM40-31AL PM40-32AL PM40-33AL PM40-39AL | | OUTPUT #2 | OUTPUT #1 | OUTPUT #1 | COMMON RETURN | COMMON RETURN | OUTPUT #3 |