
Infrared LED
L7558 series

High-speed, high-power infrared LED for spatial light transmission

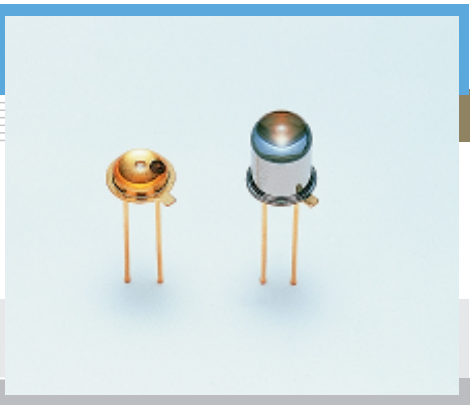

L7558 series infrared LEDs were developed for spatial light transmission of high-density information such as image data signals, and operate at high speeds of 50 MHz.
L7558 delivers high output of 14 mW and is used in combination with a light projection lens that matches the application. L7558-01 is sealed in a metal package capped with a glass lens that ensures narrow directivity of ±7°(full angle at half maximum). Metal stem package gives L7558 and L7558-01 higher reliability than plastic package devices.

Features

- High-speed response: 50 MHz Typ. (I_F=50 mA)
- High radiant output power
  L7558 : 14 mW Typ. (I_F=50 mA)
  L7558-01: 7 mW Typ. (I_F=50 mA)
- High reliability

Applications

- Spatial light transmission

■ Absolute maximum ratings (Ta=25 °C)

Parameter	Symbol	Condition	Value	Unit
Forward current	I_F		100	mA
Reverse voltage	V_R		5	V
Pulse forward current	I_{FP}	Pulse width =10 µs Duty ratio =1 %	1.0	A
Operating temperature	Topr		-30 to +85	°C
Storage temperature	Tstg		-40 to +100 *	°C


* Guaranteed to resist temperature cycle test of up to 5 cycles.

■ Electrical and optical characteristics (Ta=25 °C)

Parameter	Symbol	Condition	L7558			L7558-01			Unit
			Min.	Typ.	Max.	Min.	Typ.	Max.	
Peak emission wavelength	λp	I_F=50 mA	820	850	880	820	850	880	nm
Spectral half width	Δλ	I_F=50 mA	-	50	-	-	50	-	nm
Forward voltage	V_F	I_F=50 mA	-	1.45	1.60	-	1.45	1.60	V
Pulse forward voltage	V_{FP}	I_F=1 A	-	3.4	4.3	-	3.4	4.3	V
Reverse current	I_R	V_R=5 V	-	-	10	-	-	10	µA
Radiant flux	φe	I_F=50 mA	11	14	-	5.5	7.0	-	mW
Radiant illuminance	P_E	I_F=50 mA	-	1.5	-	-	4.0	-	mW/cm^2
Cut-off frequency	fc	I_F=50 mA ± 1mAp-p	35	50	-	35	50	-	MHz


SOLID STATE DIVISION

■ Emission spectrum

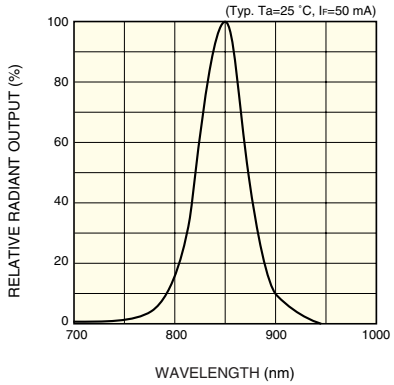


KLEDB0153EA

■ Radiant flux vs. forward current

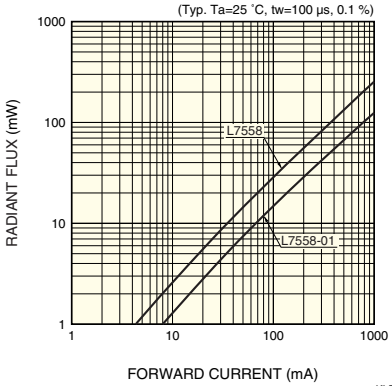


KLEDB0154EA

■ Forward current vs. forward voltage

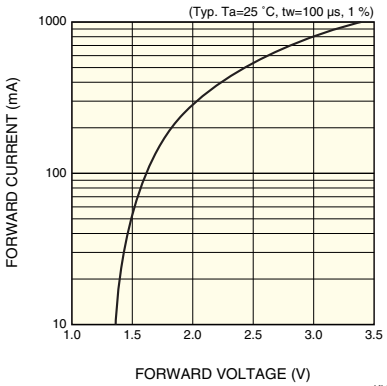


KLEDB0155EA

■ Directivity

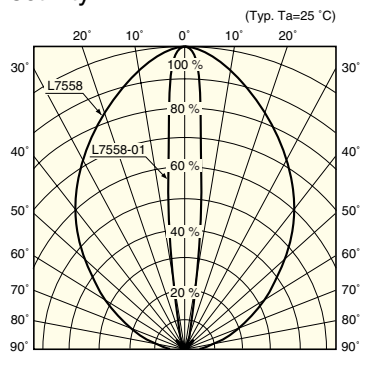


KLEDB0066EA

■ Radiant output vs. ambient temperature

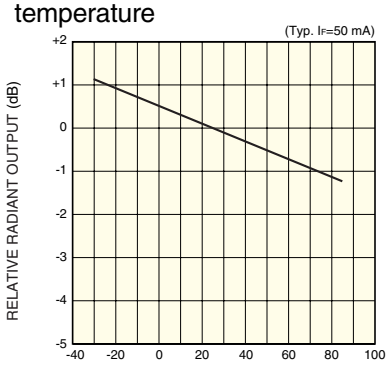


KLEDB0156EA

■ Allowable forward current vs. ambient temperature

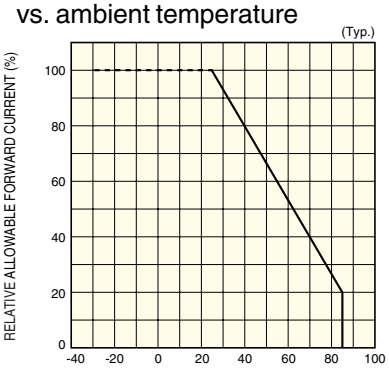

KLEDB0027EB


■ Allowable forward current vs. duty ratio

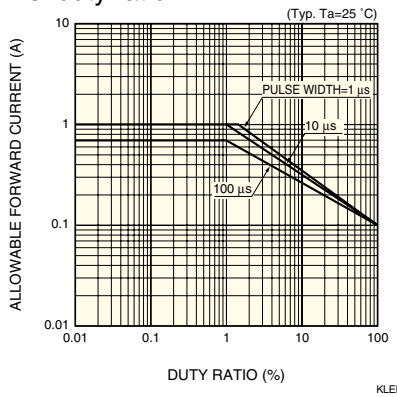

KLEDB0157EA


■ Dimensional outlines (unit: mm)

L7558

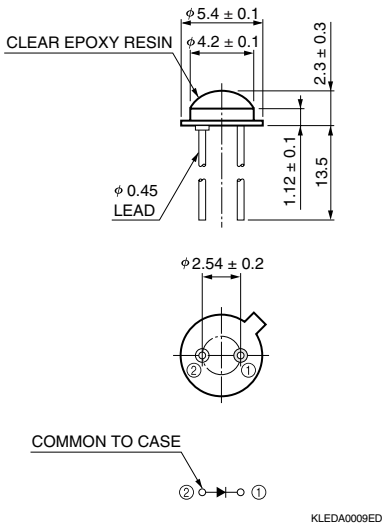

KLEDA0009ED

L7558-01

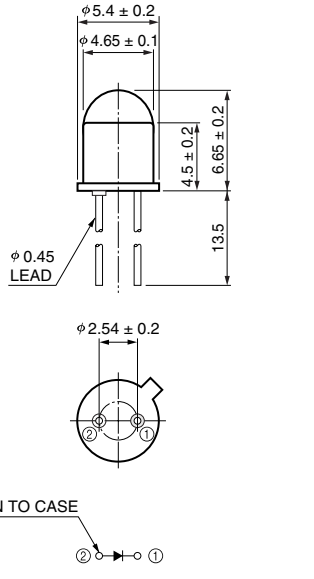

KLEDA0052EB

HAMAMATSU

Information furnished by HAMAMATSU is believed to be reliable. However, no responsibility is assumed for possible inaccuracies or omissions.
Specifications are subject to change without notice. No patent rights are granted to any of the circuits described herein. ©2001 Hamamatsu Photonics K.K.

HAMAMATSU PHOTONICS K.K., Solid State Division
1126-1 Ichino-cho, Hamamatsu City, 435-8558 Japan, Telephone: (81) 053-434-3311, Fax: (81) 053-434-5184, http://www.hamamatsu.com
U.S.A.: Hamamatsu Corporation: 360 Foothill Road, P.O.Box 6910, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1) 908-231-0960, Fax: (1) 908-231-1218
Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49) 08152-3750, Fax: (49) 08152-2658
France: Hamamatsu Photonics France S.A.R.L.: 8, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: 33-(1) 69 53 71 00, Fax: 33-(1) 69 53 71 10
United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire AL7 1BW, United Kingdom, Telephone: (44) 1707-294888, Fax: (44) 1707-325777
North Europe: Hamamatsu Photonics Norden AB: Smidesvägen 12, SE-171 41 Solna, Sweden, Telephone: (46) 8-509-031-00, Fax: (46) 8-509-031-01
Italy: Hamamatsu Photonics Italia S.R.L.: Strada della Moia, 1/E, 20020 Arese, (Milano), Italy, Telephone: (39) 02-935-81-733, Fax: (39) 02-935-81-741

Cat. No. KLED1009E02
Apr. 2001 DN