


GSD

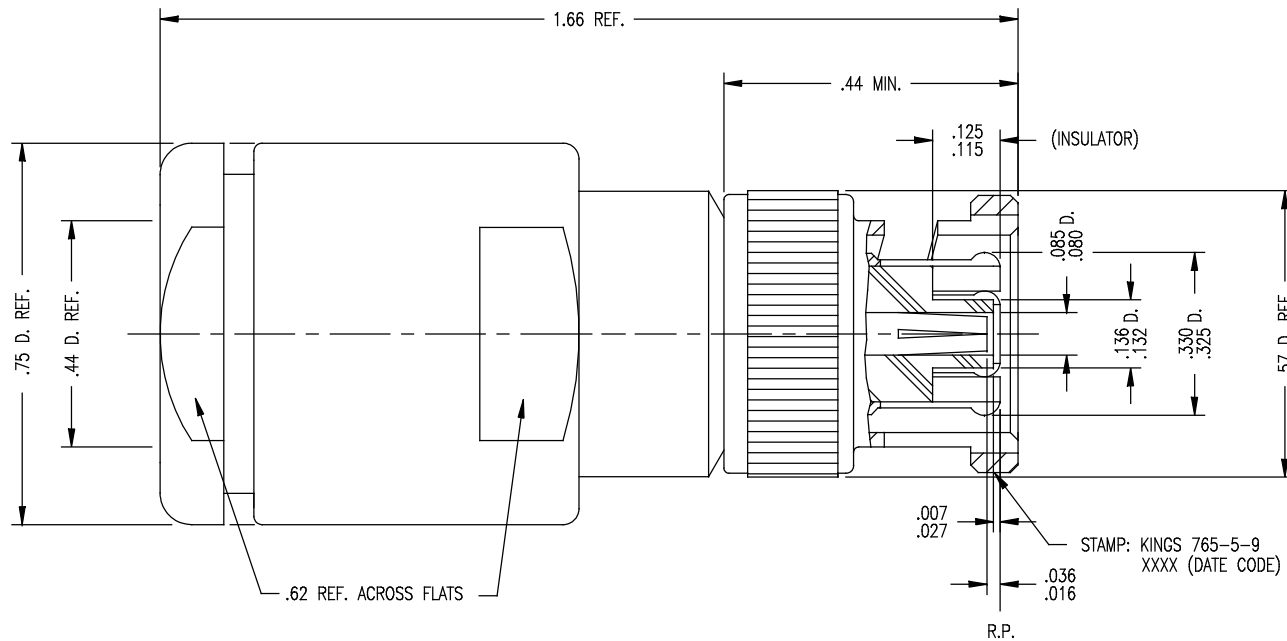

NOTES:

- FOR USE WITH RG-8, 9, 11, 213 & 214/U CABLES.
- FOR CABLING INSTRUCTIONS SEE CP-1005.
- INTERFACE PER MIL-STD-348, FIG. 301-1 AND AS SHOWN ABOVE.
- MATERIALS:
 - INSULATOR: TEFLON, ASTM-D-4894
 - GASKETS: SILICONE RUBBER, ZZ-R-765
 - WASHER
 - SPRING WASHER
 - CENTER CONTACT } BER. COPPER, ASTM-B-196
 - OUTER CONTACT }
 - ALL OTHER METAL PARTS: BRASS, ASTM-B16
- FINISHES:
 - CENTER CONTACT: HARD GOLD PLATE PER MIL-G-45204
 - SPRING WASHER: SILVER PLATE PER QQ-S-365
 - ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT NICKEL FINISH (TR-5)
- ELECTRICAL CHARACTERISTICS:
 - NOMINAL IMPEDANCE: 50 ~W
 - WORKING VOLTAGE: 500 VOLTS RMS
 - FREQUENCY RANGE: DC TO 4 GHz
- MARK PACKAGE IN ACCORDANCE WITH CONTROL DOCUMENT.

765-5-9

REVISIONS

ISSUE	CHANGES
0	ER 34579 KH 04/15/93
1	CN 35782 A KH 10/05/94
2	CN 36247 A ME 04/24/95

JCA3594

SCALE 4:1

APPROX SURFACE AREA

WAS: E-17865

USED ON

REF: INTERMEC

PLUG, BNC, POLARIZED

DRAWN JCA DATE 03/09/93

DESIGN CT DATE 03/09/93

APPR. VLS DATE 03/11/93

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

765-5-9

GSD