


NOTES:

Current Rating: 3.0AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Brass  
 Contact plating: Au over Ni  
 Insulator Material: PBT+30%G.F UL94V-0

10P-18P With "C", Without "D",  
 20P-64P With "C" and "D".

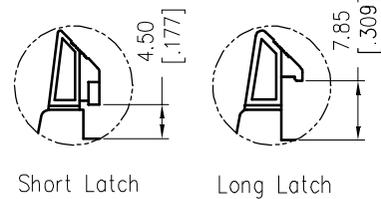

PART NO.:

Z-S3820 \*\*\* \* N \* \* 01

No. of Pins: 10 30, 14 34, 16 40, 20 50, 26 60, 60

Latch Type:  
 L=Long Latch  
 S=Short Latch  
 N=Without Latch

Insulator Color:  
 G=Grey(427C)  
 E=Grey(413C)  
 B=Black  
 U=Blue

Contact Plating:  
 A=Gold Flash/Ni  
 B=10u"Gold/Ni  
 C=15u"Gold/Ni  
 D=30u"Gold/Ni

Item	Pitch	Mating
Standard	2.54	5212
Alternate		

UNITS <input checked="" type="checkbox"/> mm <input type="checkbox"/> INCH		NAME: 2.54mm EJECTOR HEADER IDC TYPE		NEXTRON NEXTRONICS ENGINEERING CORP.	
GENERAL TOLERANCES: (UNLESS SPECIFIED)		PART NO: Z-S3820***N**01		TITLE: CUSTOMER DWG	
	mm	INCH			
4 PLACE	± **	± **			
3 PLACE	± 0.15	± **			
2 PLACE	± 0.25	± **			
1 PLACE	± 0.40	± **			
ANGULAR:	X° ± 3°	X° ± **			
APPD:		CHKD:		DWG NO: *** C	
DRAWN: 陈惠枝 5/14'15		SCALE: 1/1		SHEET: 1/1	
REV. DESCRIPTION		DATE		REV.:	
A	NEW RELEASED	5/14'15			