

ISDN S Interface Hybrid

APC14131s


ELECTRICAL SPECIFICATIONS@25°C OPERATING TEMPERATURE -40°C TO +85°C

Turns Ratio ±5%	Primary Inductance mH min	Leakage Inductance uH max	Primary DCR Ω ±30%	Secondary DCR Ω ±30%	Choke	
					Inductance per line mH nom	DCR per line Ω
1CT : 1	22	4	1.95	1.95	0.04	0.5

NOTES: 1. Isolation PRI : SEC, 1500 Vrms
2. Designed to be used with Infineon PEB3086, PEB 3186, PEB3081

SCHEMATIC


APC14131s

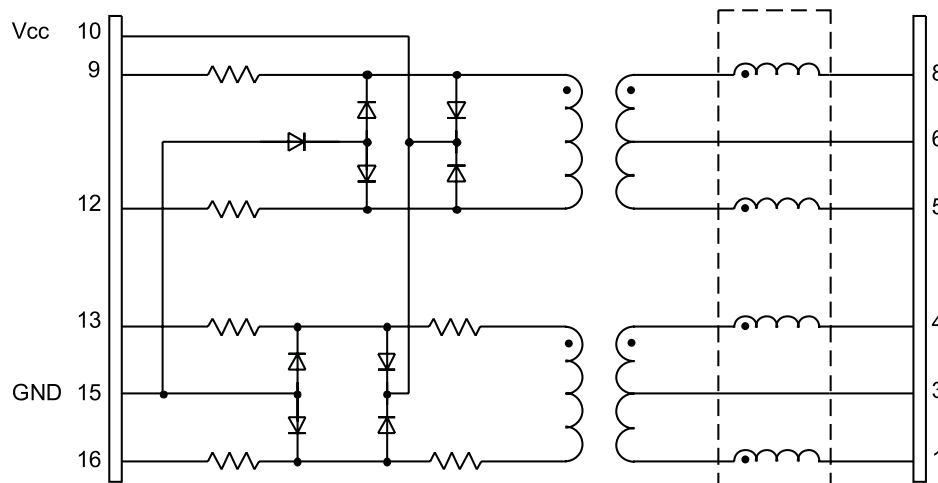


MECHANICAL

APC14131s


Top View

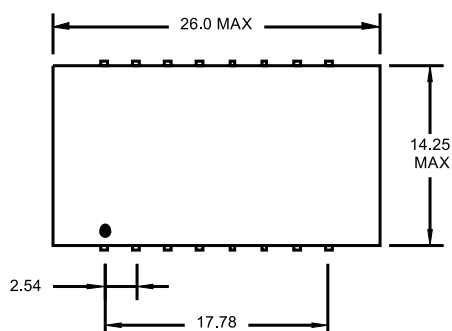


Side View

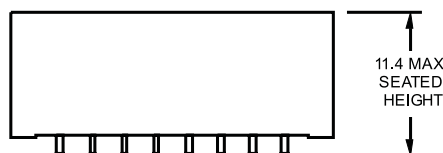

End View



Recommended PCB Layout

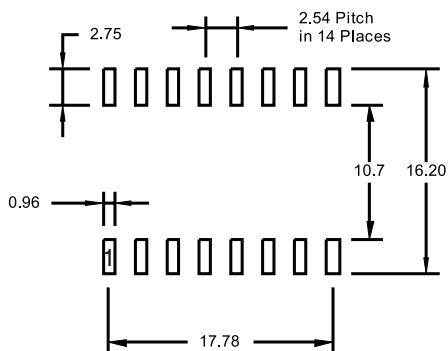

NOTES: DIMENSIONS MM UNLESS OTHERWISE SPECIFIED
ALL TOLERANCES +/- 0.010
0.25

©2003 Bel Fuse Inc. Specifications subject to change without notice. 08.19.03

CORPORATE

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F / 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Stewart Connector
45/46 Riverside
Medway City Estate
Rochester, Kent ME2 4DP U.K.
Tel 44-1634-722890
Fax 44-1634-716677
www.belfuse.com