

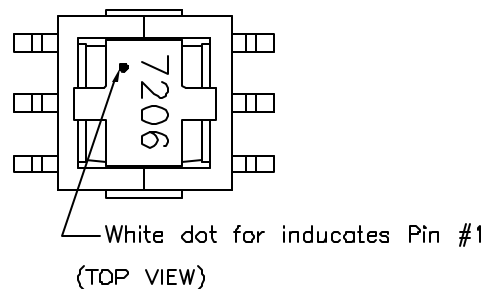
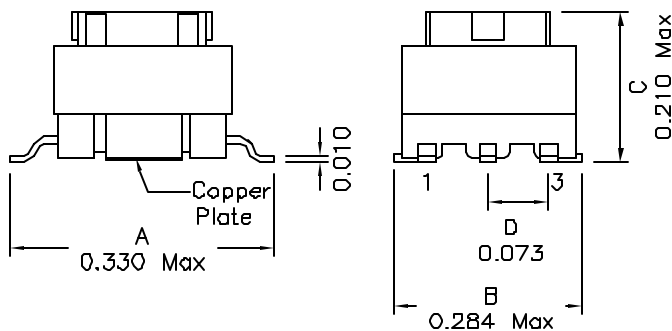


## 1. Mechanical Dimensions:

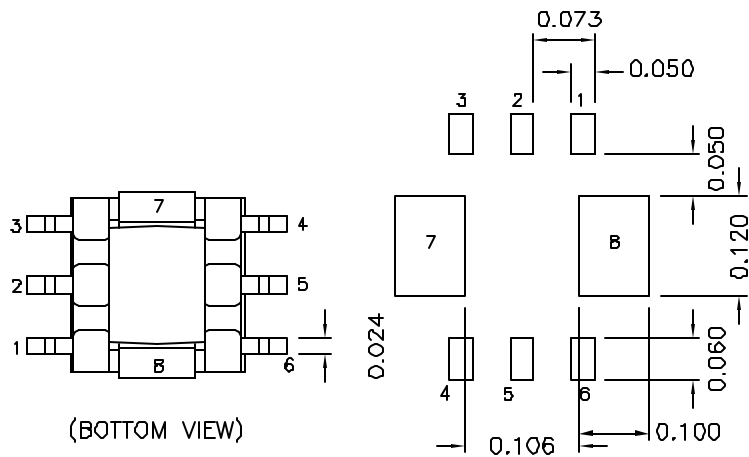

## 2. Schematic:

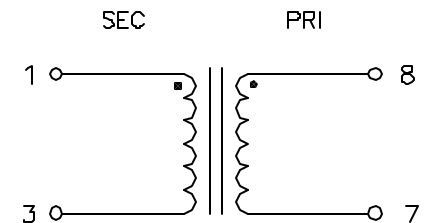

## 3. Electrical Specifications:

OCL: Pins 1-3 720uH Typ @10KHz 0.1V

Q: Pins 1-3 10 Min @10KHz 0.1V

DCR: Pins 1-3 1.75 Ohms Max

Turns Ratio: Pins (1-3):(8-7)=60:1

HIPOT: 500Vac Wdg-Wdg

Rated Current: 20A

### Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-D
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C, UL file E151558
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. SMD Lead Coplanarity:  $\pm 0.004^{\circ}$  (D.102mm)
9. Electrical and mechanical specifications 100% tested
10. RoHS Compliant Component

<b>XFMRs Inc</b> www.XFMRs.com	Title: Current Sense Xfmr		
Unless Otherwise Specified	P/N: XF7206-EE5CS	REV. A	
TOLERANCES: .xxx $\pm 0.010$ Dimensions in INCH	DWN.	Mei Chen	Aug-24-10
	CHK.	YK Liao	Aug-24-10
SHEET 1 OF 1	APP.	Joe Huff	Aug-24-10

DOC REV: A/6