




# PV12P105A01B00



## Specifications


Power Rating	0.5W	Measure Condition of RatedPower	70°C
Shape	Lead	Operating Temperature Range	-55°C to 125°C
Maximum Working Voltage	300Vdc	Mass	0.57g
Adjustment Direction	Top		
Size	7mm		
Auto Adjustment	No		
Number of Turns (Effective Rotation Angle)	4		
Mechanical Rotation Angle	-		
Total Resistance Value	1MΩ		
Total Resistance Value Tolerance	±10%		
Temperature Coefficient of Resistance	±100ppm/°C		
Resistance Taper	B (Linear)		
Contact Resistance Variation	Less than 3% of total resistance value or 3ohm, whichever is greater		
Residual Resistance	2ohm max.		
Soldering Method	Flow, Soldering Iron		
Torque	14.7mN·m max.		

### Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, its specifications are subject to change or our products may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.  
 2. This datasheet has only typical specifications because there is no space for detailed specifications.  
 Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

# PV12P105A01B00

## Product Data

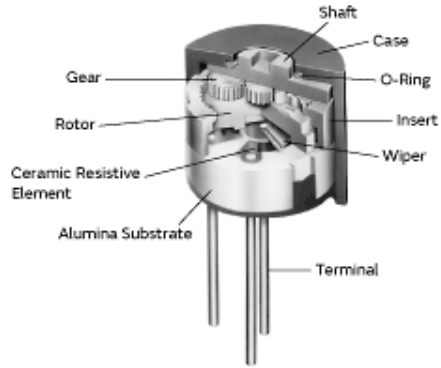

### Constructions

#### Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, its specifications are subject to change or our products may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.  
2. This datasheet has only typical specifications because there is no space for detailed specifications.  
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.