


HOLE PATTERN:

Space requirement 10x10 pitch

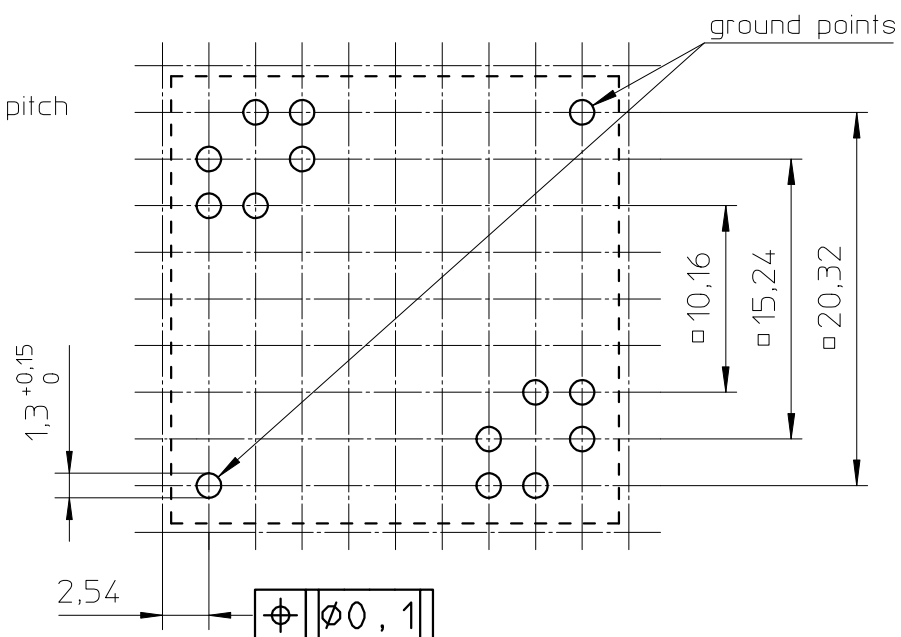

Coil former material: Bakelite UP 3420, glass-reinforced

UL file number: E61040 - UL94V-0.

Pin material: CuSn - Ni flash, Sn plated.

Max. operating temp.: acc. to IEC 60 085 class F, 155°C

Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3,5s

Solderability: IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2sec.

Winding area: 42,7 mm.²

Mean length of turn: 52,3mm.