



LIC01-SERIES

Application Specific Discretetes
A.S.D.TM

LIGHT IGNITION CIRCUIT

FEATURES

- HIGH VOLTAGE BREAKOVER DIODE:
 $V_{BO \text{ MIN}} = 195$ or 215 V
- HIGH HOLDING CURRENT STRUCTURE :
 $I_H > 50 \text{ mA}$
- HIGH PEAK CURRENT PULSE CAPABILITY :
 $I_{TRM} = 50 \text{ A}$
- DIRECT OPERATION ON 220/240 VAC MAINS CIRCUITS.

BENEFITS

- SPACE SAVING THANKS TO MONOLOTHIC FUNCTION INTEGRATION
- HIGH RELIABILITY WITH PLANAR TECHNOLOGY

DESCRIPTION


The LIC01 has been especially designed for high voltage pulse generation circuits such as light ignitors for :

- . High pressure sodium lamp
- . Lamp flashing circuit
- . Metal Halid lamp


It uses a high performance planar diffused technology device suitable for high surge current operation in rugged environmental conditions.

When the voltage across the device reaches the breakover voltage, it decreases from an off state to low voltage on-state condition. When the current through the circuit drops below the holding current I_H , the device comes back to the off state.

| DEVICE TYPE | BREAKDOWN VOLTAGE RANGE |
|-------------|--|
| LIC01-195 | $V_{BO \text{ min}}: 195\text{V}$ $V_{BO \text{ max}}: 230\text{V}$ |
| LIC01-215 | $V_{BO \text{ min}}: 215\text{V}$ $V_{BO \text{ max}}: 255\text{V}$ |

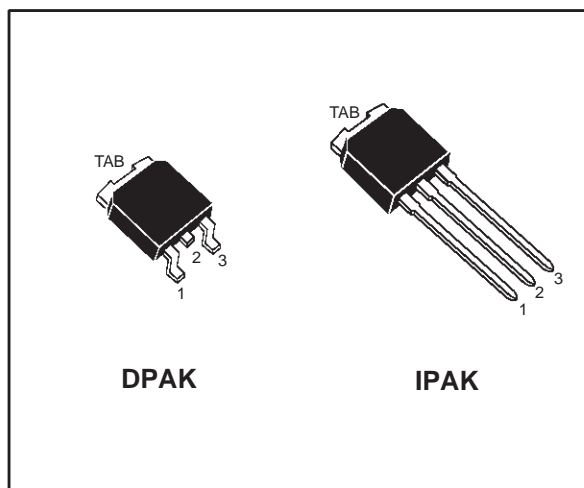

FUNCTIONAL DIAGRAM

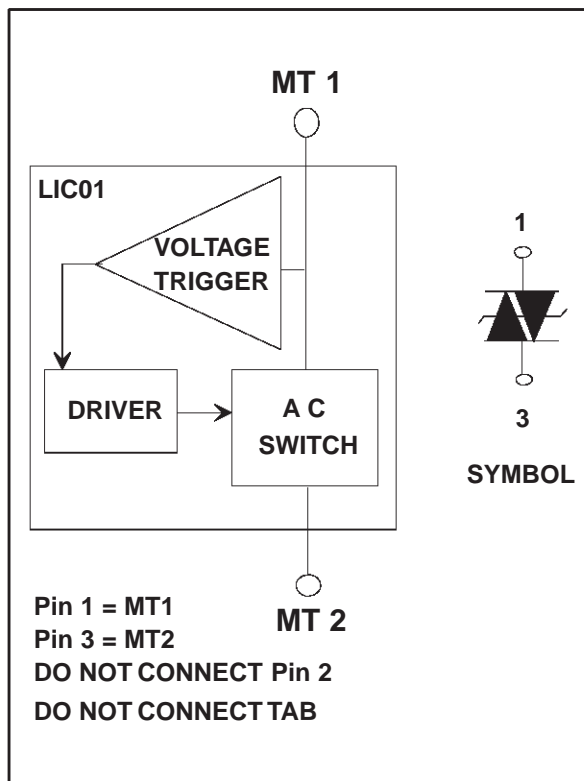


LIC01-SERIES

ABSOLUTE RATINGS (limiting values)

| Symbol | Parameter | | Value | Unit |
|---------------------|---|-----------------------------|---------------|------------|
| I_{TRM} | Repetitive surge peak on state current | $t_p = 10\mu s$ (note 1) | ± 50 | A |
| $I_{T(RMS)}$ | RMS on state current | $T_{amb} = 90^\circ C$ | 1.2 | A |
| di/dt | Critical rate of rise on state current | | 80 | A/ μs |
| V_{DRM} / V_{RRM} | Repetitive peak off state voltage | $T_j = 125^\circ C$ | 180 | V |
| T_{stg} | Storage junction temperature range | | - 40 to + 125 | $^\circ C$ |
| T_j | Operating junction temperature range | | -20 to 125 | $^\circ C$ |
| T_L | Maximum lead temperature for soldering during 10s | | 260 | $^\circ C$ |


Note 1 : Test current waveform

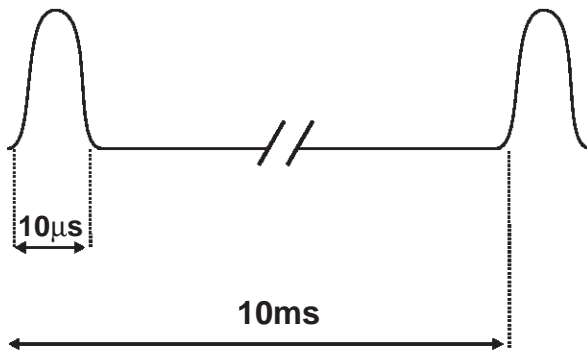

THERMAL RESISTANCE


| Symbol | Parameter | Value | Unit |
|---------------|---------------------|-------|--------------|
| $R_{th(j-a)}$ | Junction to ambient | 100 | $^\circ C/W$ |
| $R_{th(j-c)}$ | Junction to case | 3.5 | $^\circ C/W$ |

ORDERING INFORMATION

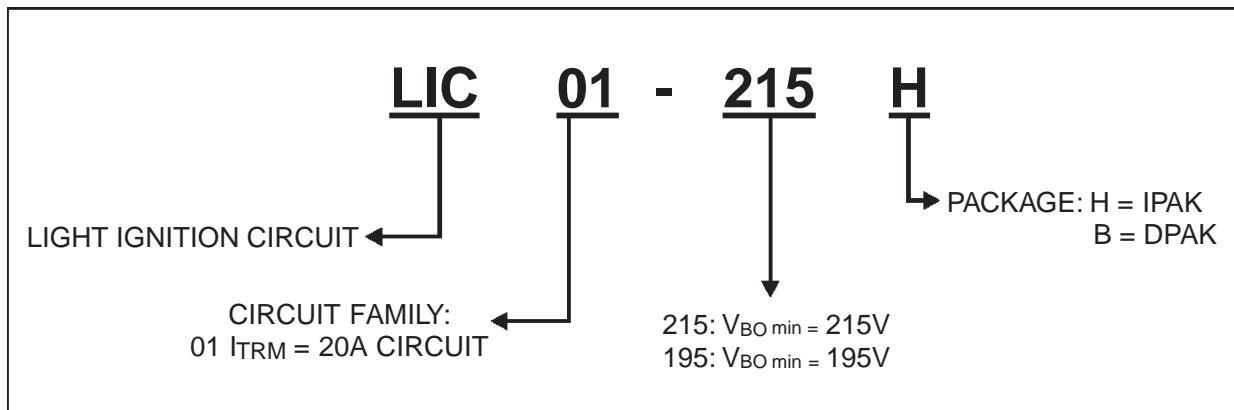

ELECTRICAL CHARACTERISTICS

| Symbol | Parameters |
|----------|-------------------|
| V_{RM} | Stand-off voltage |
| V_{TM} | On-state voltage |
| V_{BO} | Breakover voltage |
| I_{TM} | On-state current |
| I_H | Holding current |
| I_{BO} | Breakover current |
| I_{RM} | Leakage current |

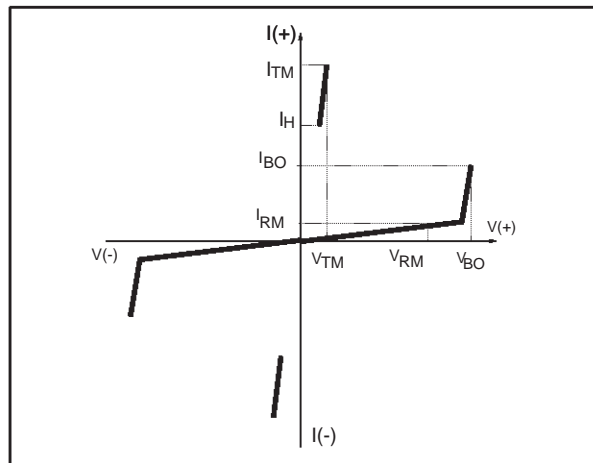

ELECTRICAL PARAMETERS

| Symbol | Test conditions | | | Value | Unit | |
|----------|-----------------------|-----------|---------------------|-------|------|---------|
| I_{RM} | $V_D = V_{RM} 180V$ | | $T_j = 25^\circ C$ | MAX | 5 | μA |
| | | | $T_j = 125^\circ C$ | MAX | 50 | μA |
| V_{BO} | I_{BO} | LIC01-195 | $T_j = 25^\circ C$ | MIN | 195 | V |
| | | | | MAX | 230 | |
| | | LIC01-215 | $T_j = 25^\circ C$ | MIN | 215 | V |
| | | | | MAX | 255 | |
| I_{BO} | $V_{BO} \text{ max.}$ | | $T_j = 25^\circ C$ | TYP | 200 | μA |
| | | | | MAX | 500 | |
| I_H | $I_T = 350mA$ | | $T_j = 25^\circ C$ | MIN | 50 | mA |
| V_{TM} | $I_{TM} = 1A$ | | $T_j = 25^\circ C$ | MAX | 5 | V |

HOLDING CURRENT TEST CIRCUIT

$R1 = 1k\Omega / 50W$ (a 220V / 60W bulb can be used)

$R2 = 22\Omega$
 $C2 = 220nF$ } Auxiliary network providing the complete firing of the LIC01 under test


I_T 0.1A/div

$t = 2ms/div$


I_H

LIC01-SERIES

VARIATION OF V_{BO} VERSUS JUNCTION TEMPERATURE

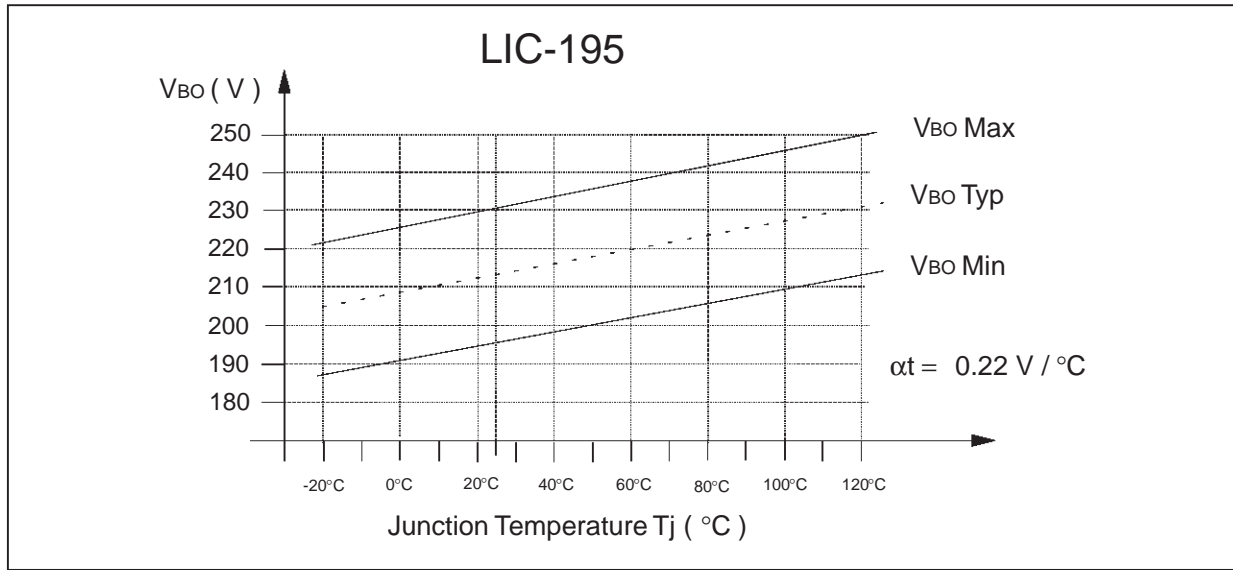


VARIATION OF V_{BO} VERSUS JUNCTION TEMPERATURE

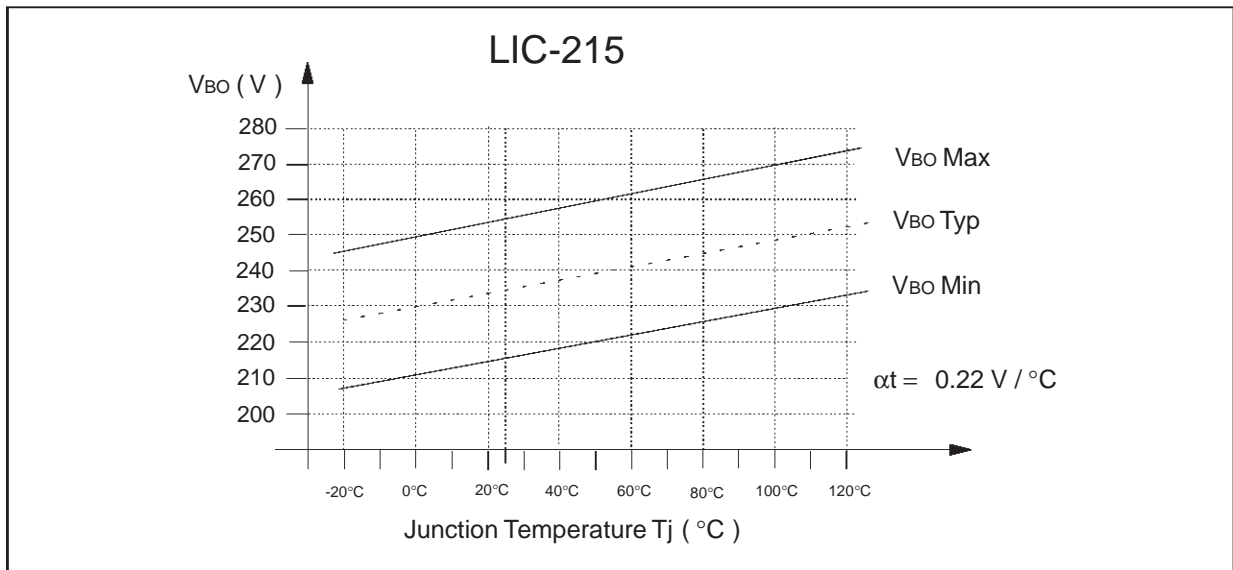


TYPICAL APPLICATION


When the peak voltage across C1 reaches the break over voltage V_{BO} of the LIC01, this device turns on and produces a pulse of current through the primary of the transformer. In turns, the transformer generates high voltage pulses across the lamp.

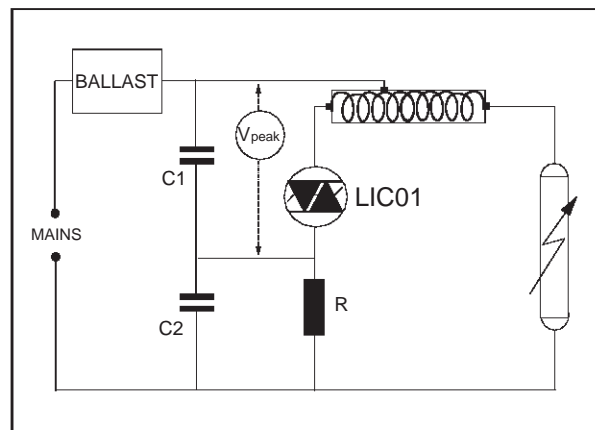

PACKAGE MECHANICAL DATA
DPAK (Plastic)

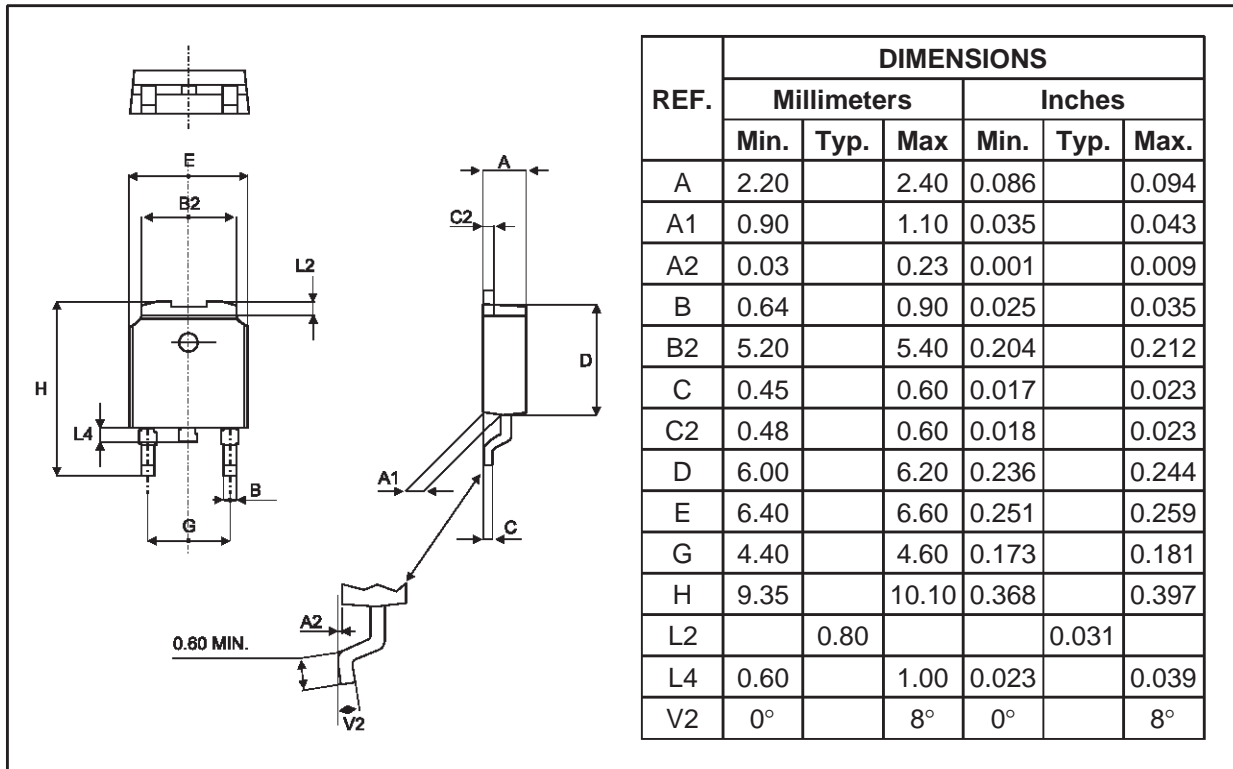


FOOT PRINT DIMENSIONS (in millimeters)

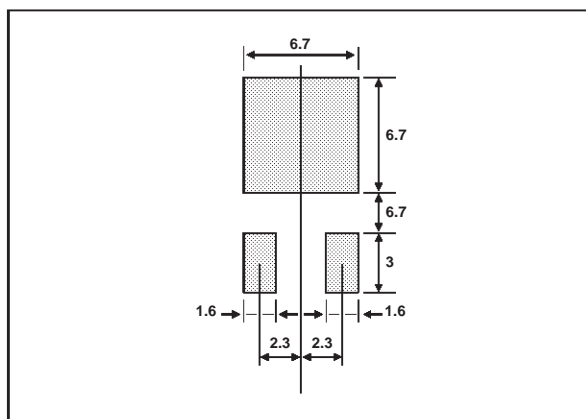

LIC01-SERIES

PACKAGE MECHANICAL DATA IPAK (Plastic)

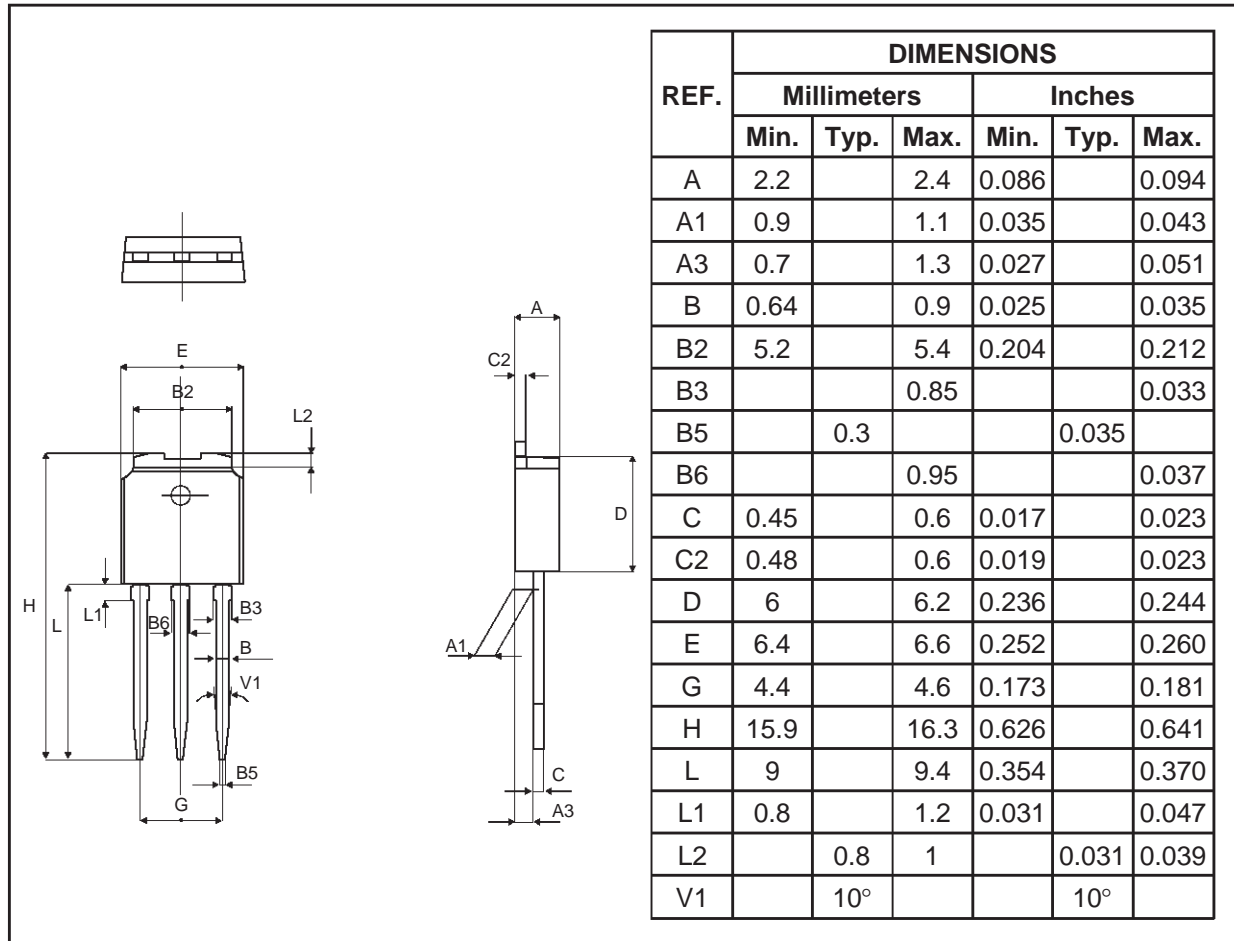

| Type | Marking | Package | Weight | Base qty | Delivery mode |
|------------|------------|---------|--------|----------|---------------|
| LIC01-xxxH | LIC01-xxxH | IPAK | 0.350g | 75 | Tube |
| LIC01-xxxB | LIC01-xxxB | DPAK | 0.300g | 75 | Tube |

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics
© 2000 STMicroelectronics - Printed in Italy - All rights reserved.

STMicroelectronics GROUP OF COMPANIES
Australia - Brazil - China - Finland - France - Germany - Hong Kong - India - Italy - Japan - Malaysia
Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - U.S.A.

<http://www.st.com>

