

HIGH VOLTAGE CERAMIC CAPACITOR

Suntan®


TS16

FEATURES

- Use for coupling, and by-pass circuit there are a stable and high reliability products

SPECIFICATIONS

OPERATING CONDITION RANGE	-25℃ to +85℃
RATED WORKING VOLTAGE	1 KV – 6KVDC
CAPACITANCE RANGE	100pF – 10,000pF
TEST VOLTAGE	$U_R \leq 500V, U = 2.5U_R$ $U_R > 500V, \leq 6KV, U = 1.5U_R + 500V$
DISSIPATION FACTOR (tan δ)	at 1 KHz, 1±0.2 Vrms. 25℃
Y5P, Z5U	tan δ ≤2.5%
Z5V	tan δ ≤5%
INSULATION RESISTANCE	10,000 MΩ or 200 MΩ whichever is the smaller

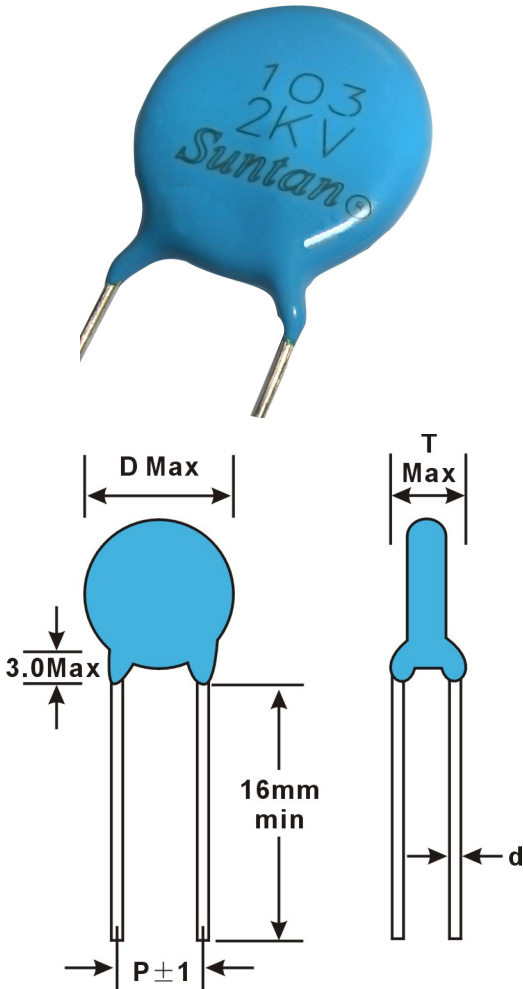

RATED W. V	Y5P (±10%)	Y5U (±10%, ±20%)	Y5V (±20%)	SL (±5%, ±10%)	NPO (±0.5pF, ±10%)	DIMENSION			
						D	P	T	d
1KV	101~821	--	--	120~101	0R5~220	6.5	5.0	3.5	0.5
	102	102~122	--	--	--	7.0			
	--	152~332	122~682	--	--	7.5			
	152~182	472~562	--	--	--	8.5			
	222~272	--	103	--	--	9.5			
	--	682	153	--	--	10.5			
	332	103	--	--	--	11.5			
	472	--	--	--	--	12.5			
	562	--	203~223	--	--	14.0			
	--	--	333	--	--	16.0			
	103	--	473	--	--	18.5			
--	--	104	--	--	23.5	10.0		0.6	
								0.6	
								0.7	
2KV	120~471	102	122~222	120~121	0R5~100	7.0	5.0	4	0.5
	561~821	122	272~332	100~470	--	8.0			
	102	222~272	472	--	--	9.0			
	152	472	682	--	--	11.0			
	182~222	--	103	--	--	12.0	7.5		0.6
	272	--	--	--	--	13.0			
	332	682	--	--	--	14.0			
	472	103	203~223	--	--	15.5			
3KV	120~471	681~102	152	120~180	010~220	7.0	7.5	4.5	0.6
	271~681	122	222	--	--	8.0			
	--	152	272~332	820	--	9.0			
	102	222	472	--	--	10.0			
	--	272~332	682~103	--	--	12.0			
	--	472	103	--	--	14.0	10.0		0.7
	--	682	--	--	--	16.0			
	--	103	--	--	--	18.5			
	--	--	203~223	--	--	21.5			

Note: Specification are subject to change without notice. For more detail and update, please visit our website.

TS16

FEATURES

- Use for coupling, and by-pass circuit there are a stable and high reliability products

RATED W. V	Y5P (±10%)	Y5U (±10%, ±20%)	Y5V (±20%)	SL (±5%, ±10%)	NPO (±0.5pF, ±10%)	DIMENSION			
						D	P	T	d
4KV	101~471	681~102	152	270~680	030~220	7.0	7.5	4.5	0.6
	271~681	--	222	--	--	8.0			
	--	152	332	820	--	9.0			
	102	222	472	--	--	10.0			
	--	332	682~103	--	--	12.0			
	--	472	103	--	--	14.0	10.0	4.5	0.7
	--	103	--	--	--	18.5			
	--	--	203~223	--	--	21.5			
5KV	101~221	331~471	102	--	--	7.0	10.0	5.5	0.6
	331	561~102	152	--	--	8.0			
	471	--	222	--	--	9.0			
	561~681	152	--	--	--	10.0			0.7
	--	222	332	--	--	11.0			
	102	--	472	--	--	12.0			
	--	332	--	--	--	14.5			
	--	472	--	--	--	17.5			
6KV	101~221	331~471	102	--	--	7.0	10.0	5.5	0.6
	331	561~102	152	--	--	8.0			
	471	--	222	--	--	9.0			
	561~681	152	--	--	--	10.0			0.7
	--	222	332	--	--	11.0			
	102	--	472	--	--	12.0			
	--	332	--	--	--	14.5			
	--	472	--	--	--	17.5			

Note: Specification are subject to change without notice. For more detail and update, please visit our website.

Suntan® Technology Company Limited Website: www.suntan.com.hk Email: info@suntan.com.hk Tel: (852) 8202 8782 Fax: (852) 8208 6246