



1. Mechanical Dimensions:

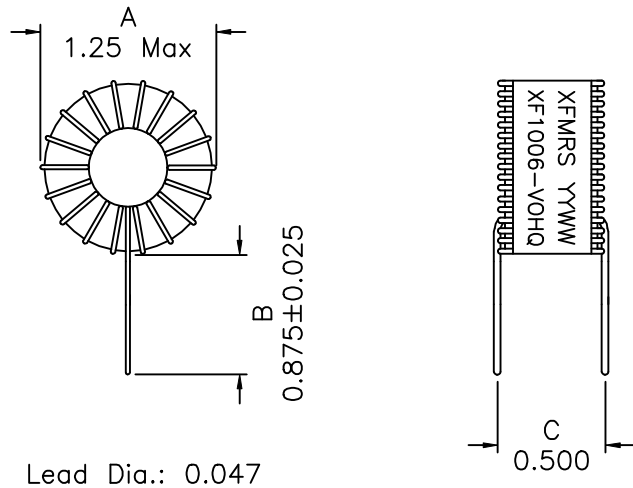

2. Schematic:



3. Electrical Specifications:

Inductance: 100uH±15% @450KHz, 100mV

Saturation Current: 5.0Adc

DC Res.: 0.040 Ohms Maximum

Q: 100 Typ @450KHz, 100mV

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: -40°C to +85°C

DOC. REV. A/2

XFMRS Inc.	Title: VERTICAL INDUCTOR		
	UNLESS OTHERWISE SPECIFIED	P/N: XF1006-VOHQ	REV. A
TOLERANCES: .xxx ±0.010	DWN.	廖玉坤	Jun-17-03
Dimensions in Inch	CHK.	李清儿	Jun-17-03
SHEET 1 OF 1	APP.	BW	Jun-17-03