


3.2×2.5mm for Consumer Products

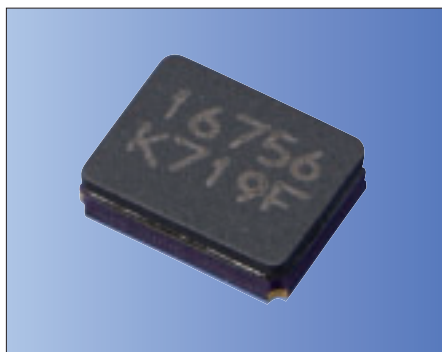

RoHS Compliant

Features

- Crystal unit for Consumer Products
- Small and low profile 0.9mm max. (3.2×2.5×0.8mm)
- Ceramic package
- Reflow compatible

Applications

- Digital Electronics
- Consumer Products

How to Order

CX3225GB 27000 D0 H E Q CC

① ② ③ ④ ⑤ ⑥ ⑦

- ① Series ② Frequency
③ Load Capacitance ④ Frequency Tolerance

D0 8 pF **H** ±20×10⁻⁶

- ⑤ Operating Temp. Range ⑥ Frequency Temp. Stability

EQ -10 to +70°C ±30×10⁻⁶

- ⑦ Individual Specification
(STD Specification is "CC")

Packaging (Tape & Reel 3000 pcs./ reel)

Specifications

Item	Symbol	Specification	Units	Remarks
Frequency Range	f _{nom}	12000 to 54000	kHz	
Overtone Order	OT	Fundamental	—	
Load Capacitance	CL	8	pF	Please contact us for other Load Capacitance.
Frequency Tolerance	f _{tol}	±20	×10 ⁻⁶	25°C±3°C
Motional Series Resistance	R1	Table 1	ohm	
Drive Level	DL	Table 2	μW	
Operating Temp. Range	T _{use}	-10 to +70	°C	
Storage Temp. Range	T _{stg}	-40 to +85	°C	
Frequency Temp. Characteristics	f _{tem}	±30	×10 ⁻⁶	Freq. deviation from the value at 25°C

Please contact us for other specifications.

Table1 Motional Series Resistance


Frequency Range	Motional Series Resistance
12000≤f _{nom} <13000kHz	150Ω max.
13000≤f _{nom} <14000kHz	100Ω max.
14000≤f _{nom} <20000kHz	80Ω max.
20000≤f _{nom} <27000kHz	60Ω max.
27000≤f _{nom} ≤54000kHz	50Ω max.

Table2 Level of Drive

Frequency Range	Level of Drive
12000≤f _{nom} ≤54000kHz	10μW (100μW max.)

Dimensions

(Unit: mm)

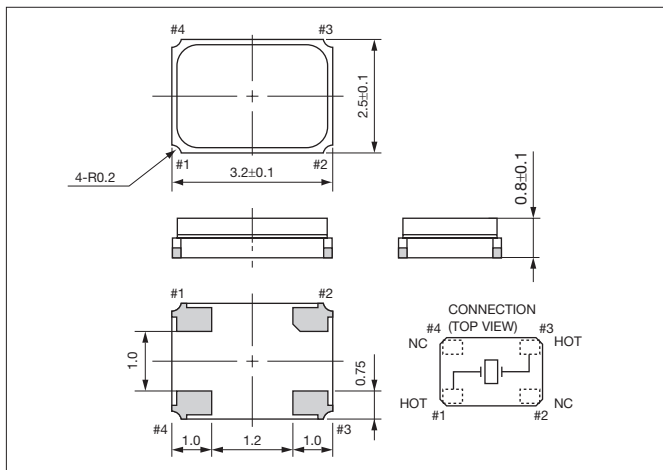

Recommended Land Pattern

(Unit: mm)

