
THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
B	RoHS Compliancy	06-01-06	DP

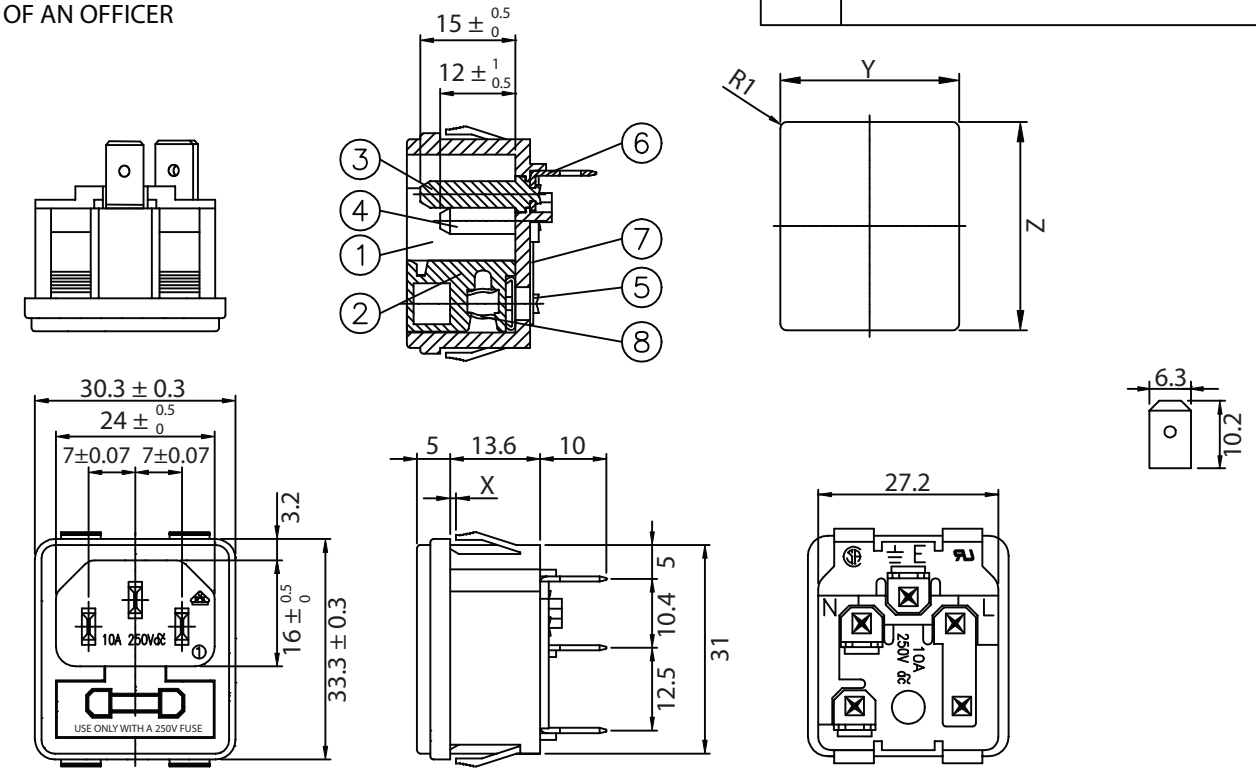

CONTROLLED

X(PANEL THICKNESS)	Y(CUTOUT DIMENSION)	Z(CUTOUT DIMENSION)
0.8~1.25 mm	$27.3\pm^{0.2}_{0}$	$31.4\pm^{0.5}_{0}$
1.25~2.0 mm	$27.3\pm^{0.2}_{0}$	$31.6\pm^{0.5}_{0}$

PANEL CUTOUT DIMENSION TABLE

NOTES:

RATING: 10A 250V AC
INSULATION RESISTANCE: 100M OHM AT 500V DC MIN
DIELECTRIC STRENGTH: 2000V AC/1 mA 1MIN
APPROVALS: UL,CSA, VDE
DUAL FUSEHOLDER, ONE ACTIVE, ONE SPARE
FUSES NOT INCLUDED - RECOMMENDED SIZE: 5 X 20mm
RoHS COMPLIANT

8	Terminal Brass t=0.5mm	2
7	Terminal Brass t=0.5mm	1
6	Terminal Brass t=0.8mm	3
5	Terminal Brass t=2.0mm	2
4	Terminal Brass t=2.0mm	2
3	Terminal Brass t=2.0mm	1
2	Cover Nylon # 66	1
1	Case Nylon # 66	1

Dim range (mm)	Tolerance +/- (mm)
0-1	0.15
1-6	0.20
6-18	0.30
18-50	0.50
50-120	0.70
120-250	0.90
250-500	1.20

Qualtek Electronics Corp.
PPC DIVISION

Part Number: 723W-X2/04 RoHS Compliant

Description: UNIVERSAL SNAP-IN INLET WITH FUSEHOLDER

	UNIT: mm	REV. B
Drawn / Date	Checked / Date	Approved / Date
B.Zhang 04-04-05	04-04-05	JJH / 04-04-05