
Extract from the online catalog

FLKM-D 9 SUB/S/COUNT/S95

Order No.: 2289489

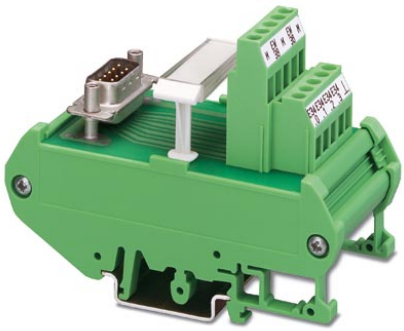

http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2289489

VARIOFACE interface module, for Siemens SIMATIC® S5-95U, alarm/counting inputs (to adapt a 9-position D-SUB pin strip to screw terminal blocks)

T B H

Product notes

WEEE/RoHS-compliant since: 07/12/2006

http://www.download.phoenixcontact.com
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Commercial data

GTIN (EAN)	4 017918 057589
Note	Made-to-order
sales group	I631
Pack	10 pcs.
Customs tariff	85369010
Catalog page information	Page 165 (IF-2002)

Technical data

General data

Nominal voltage U_N	125 V AC
Max. current carrying capacity per branch	2.5 A
	1.5 A (with even load on all branches)
Width	45 mm
Height	90 mm

Depth	68 mm
Status display	No
Ambient temperature (operation)	-20 °C ... 50 °C
Test voltage	500 V AC (50 Hz, 1 min.)
Mounting position	Any
Standards/regulations	IEC 60664
	IEC 60664 A
	DIN VDE 0110
	DIN VDE 0160 (in parts)
Pollution degree	2
Surge voltage category	II

Connection data


Connection 1	PCB connection
Connection in acc. with standard	IEC / EN
Type of connection	Screw connection
Number of positions	9
Conductor cross section solid min.	0.2 mm²
Conductor cross section solid max.	4 mm²
Conductor cross section stranded min.	0.2 mm²
Conductor cross section stranded max.	2.5 mm²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	8 mm
Screw thread	M3
Connection 2	D-SUB connection
Type of connection	Pluggable

Certificates / Approvals

Certification	GOST

Diagrams/Drawings

Circuit diagram

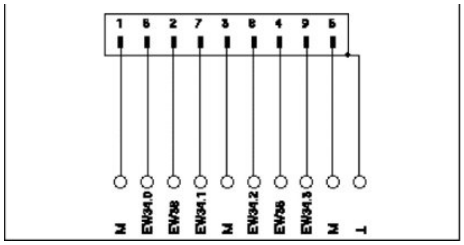

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg,Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
http://www.phoenixcontact.de

© 2011 Phoenix Contact
Technical modifications reserved;