



512 bit Read/Write Contactless Identification Device

Description

EM4269 is a CMOS integrated circuit intended for use in electronic Read/Write RF transponders. It is compatible to EM4469/4569 family. It is intended for direct connection of coil to big bumps.

Comparing to EM4469/4569 family the changes are the following:

- New configuration bit co_{25} which inverts data input to encoder is introduced.
- Writing to Protection Word is modified.

The IC is powered by picking the energy from a continuous 125 kHz magnetic field via an external coil, which together with the integrated capacitor form a resonant circuit. The IC read out data from its internal EEPROM and sends it out by switching on and off a resistive load in parallel to the coil. Commands and EEPROM data updates can be executed by 100% AM modulation of the 125 kHz magnetic field.

There are several data rate and data encoding options available. Options are stored in EEPROM Configuration word. Read and write access to EEPROM can be protected by 32 bit password. All EEPROM words can be write protected by setting lock bits which transform them in read-only.

It contains factory programmed and locked 32 bit UID number, chip type and customer code. The resonant capacitor value is selected by metal mask.

Typical Operating Configuration

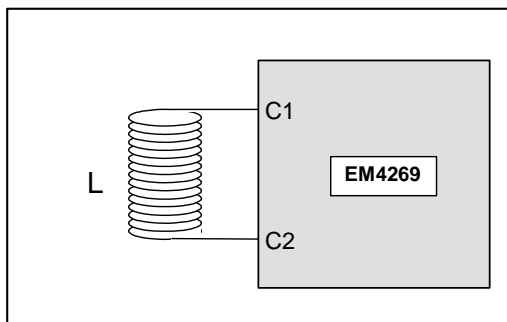


Fig 1

Features

- 512 bit EEPROM organised in 16 words of 32 bits
- 32 bit Password read and write protection
- 32 bit unique identification number (UID)
- 10 bit Customer code
- ISO 11784 / 11785 Standard Compliant
- Lock feature convert EEPROM words in read only
- Multi-purpose encoding (Manchester, Biphase, Miller, PSK, FSK)
- Multi-purpose data rate from 1 up to 32k baud
- 100 to 150kHz frequency range
- On-chip rectifier and voltage limiter
- No external supply buffer capacitor needed
- 40 to +85°C temperature range
- Very low Power consumption
- Big pads (200 μm x 400 μm) for direct connection of coil using bumps
- Resonant capacitor with options 330pF, 250pF and 75pF integrated on chip

Applications

- Access Control
- Animal Identification according to ISO FDX-B
- Material Logistics

EM Microelectronic-Marin SA (EM) makes no warranty for the use of its products, other than those expressly contained in the Company's standard warranty which is detailed in EM's General Terms of Sale located on the Company's web site. EM assumes no responsibility for any errors which may appear in this document, reserves the right to change devices or specifications detailed herein at any time without notice, and does not make any commitment to update the information contained herein. No licenses to patents or other intellectual property of EM are granted in connection with the sale of EM products, expressly or by implications. EM's products are not authorized for use as components in life support devices or systems.

© EM Microelectronic-Marin SA, 11/05, Rev A.