
TERMINAL BLOCKS

5mm PITCH DOUBLE DECK - RISING CLAMP


- Vertical double decker 5mm pitch
- 4-6 Pole interlocking
- Professional Rising clamp
- Captive screws
- 4mm² wire acceptance
- UL/ VDE/ CE approved

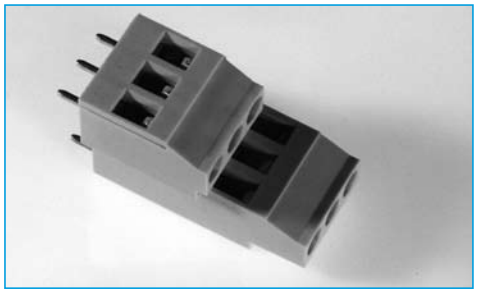

SPECIFICATION

Rating:	24A/380V
Dielectric Strength:	>2.5KV
Insulation Resistance:	>5MΩ
Working temperature:	-20°C to 125°C
Short Period:	160°
Moulding:	UL94V-0 flame retardant nylon 66
Pin/terminal:	5 micron tinned nickel plated brass
Rising clamp:	5 micron Nickel brass
Screw/torque:	M2 steel/0.5Nm 7 micron zinc colour passivated and tropicalised
Recommended PCB hole size:	ø1.3mm

OUTLINE DRAWING

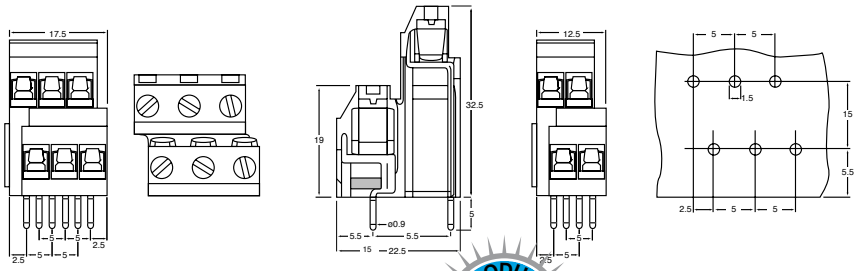

ORDERING INFORMATION


DBC	TB	6	/2
Dubilier Connectors	Series Terminal Block	Style	Nº of Ways 2 = 2 ways 3 = 3 ways

PRODUCT · NEW · PRODUCT

TERMINAL BLOCKS

5mm PITCH PLUG IN VERTICAL OR 90°


- 5mm pitch
- Flame Retardant Material
- 4mm2 wire acceptance
- UL/ CE approved
- 36way strip
- Professional rising clamp
- Easily cut to required number of poles

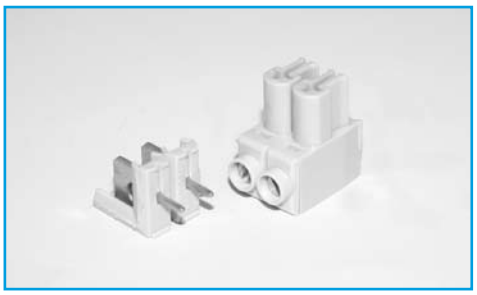

SPECIFICATION

Rating:	13.5A/380V
Dielectric Strength:	≥2.5KV/60sec
Insulation Resistance:	≥5MΩ
Working temperature:	-20°C to 125°C
Short Period:	160°
Moulding:	UL94V-0 flame retardant Lexan
Pin/terminal:	5µ tinned, nickel plated brass
Wire protector:	Zinc plated steel
Screw/torque:	M2.5 steel, 6µ zinc colour passivated and tropicalised/0.4Nm
Recommended PCB hole size:	ø1.3mm

OUTLINE DRAWING

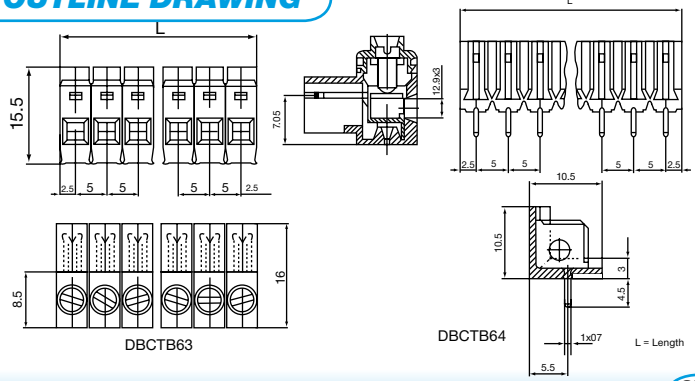

ORDERING INFORMATION

DBC	TB	63	/2
Dubilier Connectors	Series Terminal Block	Style 63=Style 63 64=Style 64	Nº of Ways 2 = 2 ways 3 = 3 ways

* Other Number of ways are available up to 12
Please consult office for further details

SECTION 18