


Features

- Low cost
- Ultra fast switching for high efficiency
- High current capability
- Plastic Case Material has UL Flammability Classification Rating 94V- 0

Mechanical Data

- Case: Molded plastic
- Terminals: Plated leads solderable per MIL-STD-750, Method 2026 guaranteed
- Polarity: Color band dented cathode end
- Mounting Position: Any
- Making: Type Number

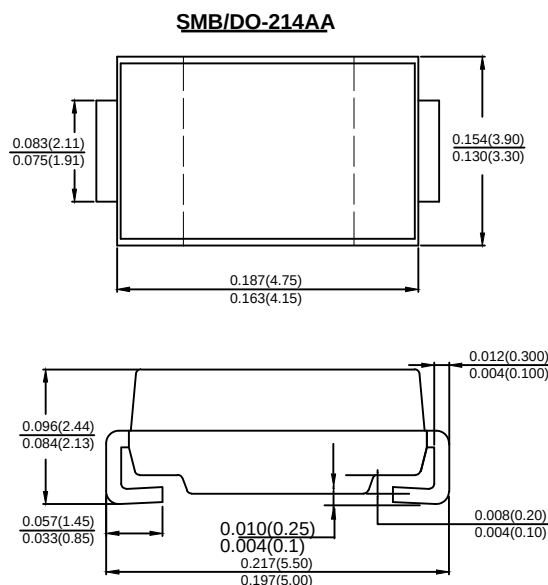

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load

For capacitive load derate current by 20%

Type Number	SYMBOL	UF2AN	UF2BN	UF2DN	UF2GN	UF2JN	UF2KN	UF2MN	Unit
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Average Rectified Output Current @T _L =55℃	I _O	2.0							A
Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	50							A
Forward Voltage @IF=2.0A	V _{FM}	1.0			1.3	1.7			V
Peak Reverse Current @T _A =25 ℃	I _R	5.0							uA
At Rated DC Blocking Voltage @T _A =100 ℃		100							
Maximum Reverse Recovery Time (Note 1)	T _{rr}	50				75			ns
Typical Junction Capacitance (Note 2)	C _J	28							pF
Typical Thermal Resistance Junction to Ambient(Note 3)	R _{θ JA}	20							℃/W
Operating Temperature Range	T _J	-55 to+150							℃
Storage Temperature Range	T _{STG}	-55 to +150							℃

Note: 1. Reverse Recovery Test Conditions: $I_F = 0.5\text{A}$, $I_R = 1.0\text{A}$, $IRR = 0.25\text{A}$.

2. Measured at 1.0 MHz and Applied reverse Voltage of 4.0V D.C

3. 8.0MM² (.013mm Thick) Land Areas.

FIG.1 MAXIMUM AVERAGE FORWARD CURRENT DERATING

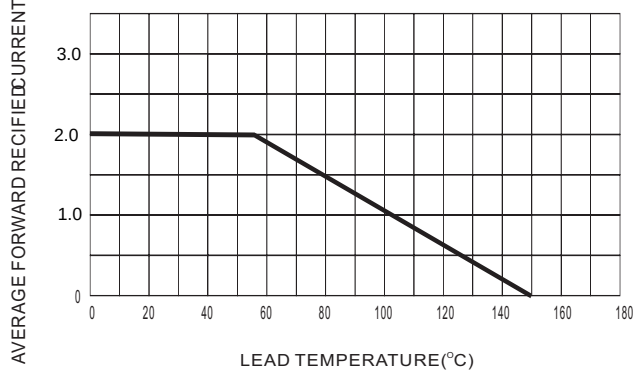


FIG.2 TYPICAL FORWARD CHARACTERISTICS

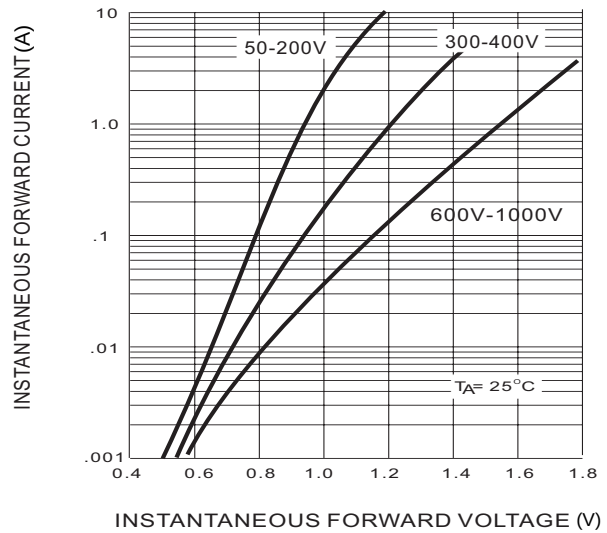


FIG.3 MAXIMUM NON-REPEITIVE SURGE CURRENT

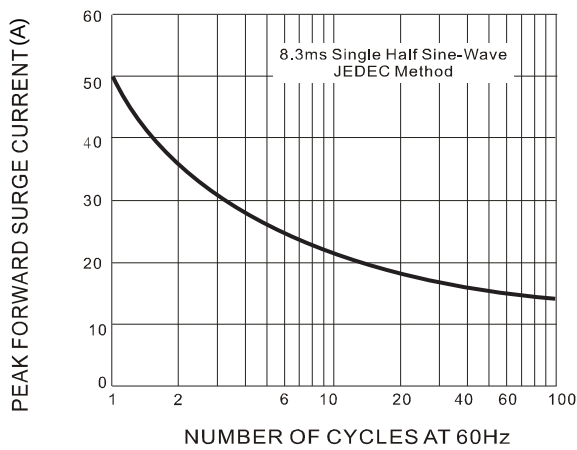


FIG.4 TYPICAL JUNCTION CAPACITANCE

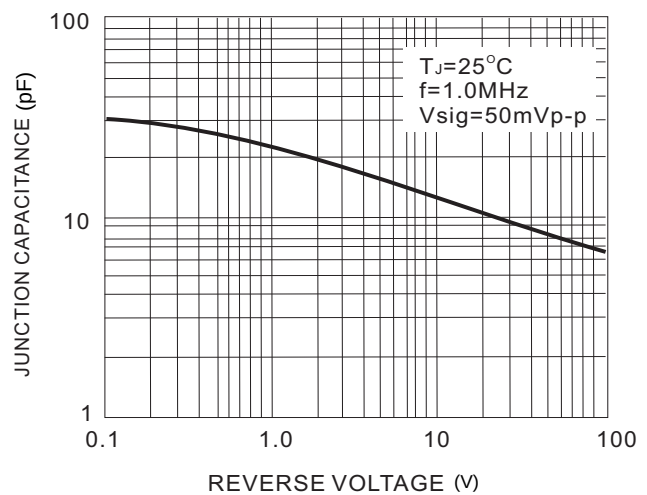


FIG.5 TYPICAL REVERSE CHARACTERISTICS

