


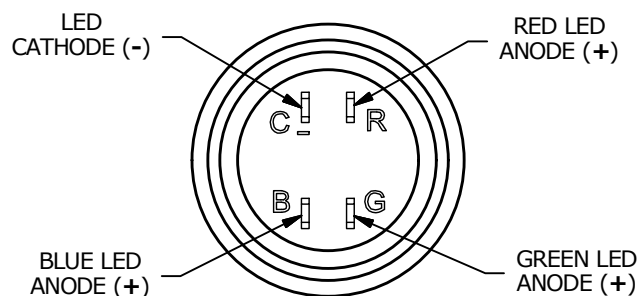
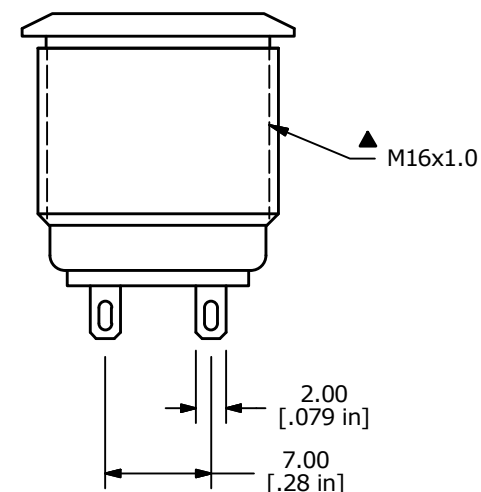


RECOMMENDED PANEL CUTOUT
MAX. PANEL THICKNESS
10.0mm [.32 in]

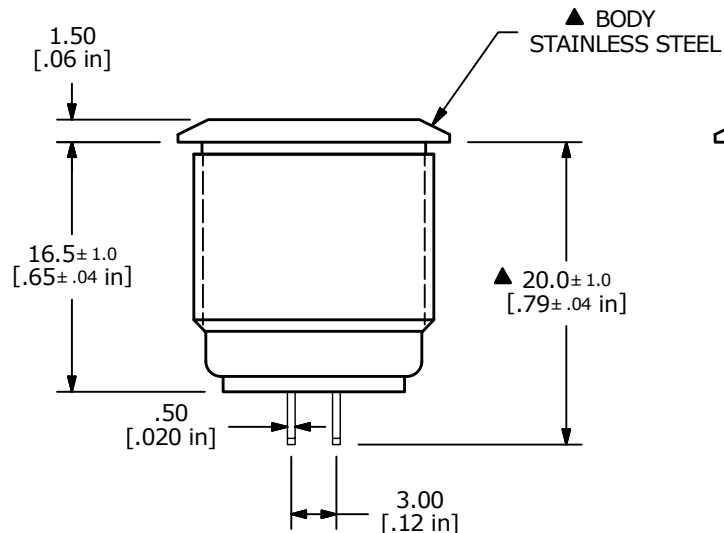

▲ LAMP INDICATOR
CONTACT CONFIGURATION

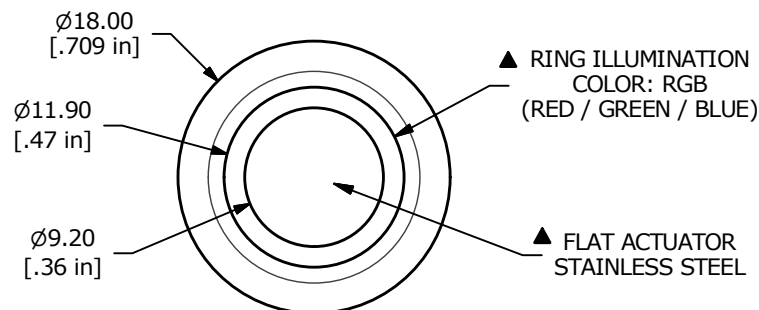

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4
X.XX = ±0.25
3. OPERATING TEMP.: -20°C to 55°C
4. ▲ DENOTES CRITICAL PARAMETER.
- ▲ 5. HARDWARE SUPPLIED: O-RING AND HEXNUT (NOT SHOWN)
- ▲ 6. ILLUMINATION COLOR: RGB (RED / GREEN / BLUE)
7. ILLUMINATION BASE RATING @ 20mA:
RED - 1.8V
GREEN - 2.8V
BLUE - 2.8V
8. 2011/65/EU (ROHS) COMPLIANT



A	23009	RELEASE FOR PRODUCTION	9/25/17	MW
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE PV6F2PXSS-3R1

SCALE 2:1	DATE 9/22/2017	DR rc	DWG 52-PV6F2PXSS3R1	REV A
--------------	-------------------	----------	------------------------	----------