HF POWER MOSFET
N-Channel Enhancement Mode

DESCRIPTION:

The **HFT150-50** is Designed for General Purpose Class B Power Amplifier Applications Up to 100 MHz.


FEATURES:

- P_G = 20 dB Typ. at 150 W/30 MHz
- η_D = 50% Typical at 150 W/30 MHz
- ***Omnigold***™ Metalization

MAXIMUM RATINGS

I_D	16 A
V_{DSS}	125 V
V_{GS}	± 30 V
P_{DISS}	300 W @ T_C = 25 °C
T_J	-65 °C to +200 °C
T_{STG}	-65 °C to +150 °C
θ_{JC}	0.6 °C/W

PACKAGE STYLE .500 4L FLG

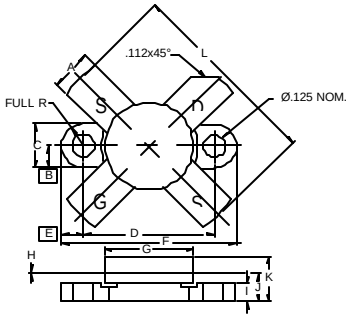

DIM	MINIMUM inches / mm	MAXIMUM inches / mm
A	.220 / 5.59	.230 / 5.84
B	.125 / 3.18	
C	.245 / 6.22	.255 / 6.48
D	.720 / 18.28	.7.30 / 18.54
E	.125 / 3.18	
F	.970 / 24.64	.980 / 24.89
G	.495 / 12.57	.505 / 12.83
H	.003 / 0.08	.007 / 0.18
I	.090 / 2.29	.110 / 2.79
J	.150 / 3.81	.175 / 4.45
K		.280 / 7.11
L	.980 / 24.89	1.050 / 26.67

ORDER CODE: ASI10617

CHARACTERISTICS T_C = 25 °C

SYMBOL	TEST CONDITIONS	MINIMUM	TYPICAL	MAXIMUM	UNITS
$V_{(BR)DSS}$	I_D = 50 mA V_{GS} = 0 V	125			V
I_{DSS}	V_{DSS} = 50 V V_{GS} = 0 V			5.0	mA
I_{GSS}	V_{GS} = 20 V V_{DS} = 0 V			1.0	µA
$V_{GS(th)}$	V_{DS} = 10 V I_D = 100 mA	1.0		5.0	V
g_{fs}	V_{DS} = 10 V I_D = 5.0 A	3.5			S
C_{iss} C_{oss} C_{rss}	V_{DS} = 50 V V_{GS} = 0 V f = 1.0 MHz		300 150 30		pF
G_{ps}	V_{DD} = 50 V I_{DQ} = 250 mA P_{OUT} = 150W (PEP)	16	20		dB
η_D	F_O = 30 & 30.001 MHz	45	50		%
ψ	VSWR 30:1 @ all phase angles	NO DEGRADATION IN OUTPUT POWER			

Specifications are subject to change without notice.