
THE INFORMATION CONTAINED HEREIN IS CONSIDERED "PROPRIETARY" TO BEL FUSE INC. AND SHALL NOT BE COPIED, REPRODUCED OR DISCLOSED WITHOUT THE WRITTEN APPROVAL OF BEL FUSE INC.

RoHS 2002/95/EC

SCHEMATIC

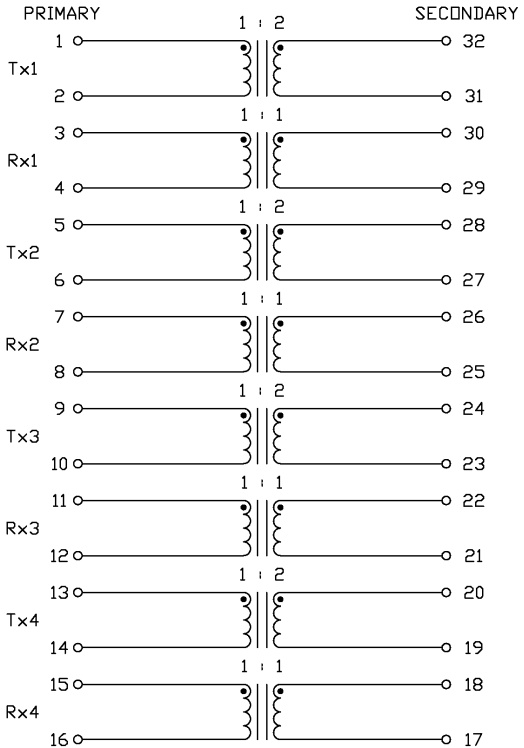

ELECTRICAL CHARACTERISTICS @ 25°C

TURNS RATIO	
Tx PRIMARY : SECONDARY	1 : 2
Rx PRIMARY : SECONDARY	1 : 1
INDUCTANCE	
Tx PRIMARY	1.5 mH MIN. @10kHz, 10mV
AT -40°C	640 μH MIN.
Rx PRIMARY	1.8 mH MIN. @10kHz, 10mV
AT -40°C	850 μH MIN.
LEAKAGE INDUCTANCE Le	
Tx PRIMARY (SECONDARY SIDE SHORTED)	0.30 μH MAX. @1MHz, 20mV
Rx PRIMARY (SECONDARY SIDE SHORTED)	0.50 μH MAX. @1MHz, 20mV
INTERWINDING CAPACITANCE Cw/w	
Tx PRIMARY - SECONDARY	35pF MAX. @1MHz, 20mV
Rx PRIMARY - SECONDARY	35pF MAX. @1MHz, 20mV
DC RESISTANCE	
Tx PRIMARY	0.60 Ω MAX.
Tx SECONDARY	1.20 Ω MAX.
Rx PRIMARY & SECONDARY	0.60 Ω MAX.
HIPOT	PER HAND-WORK-03


ORIGINATED BY	DATE	TITLE	PART NO. / DRAWING NO.	STANDARD DIM. TOL. IN INCH	[ ] METRIC DIM. AS REFERENCE
HO	04-19-06	4-CHANNEL T1/E1 LIU MAGNETICS MODULE S553-6500-C8-F	X5536500C8-F	.X	UNIT : INCH [mm] REV. : A
DRAWN BY	DATE		FILE NAME	.XX	SCALE : N/A SIZE : A4
DQ Chen	04-19-06		X5536500C8FA.DWG	.XXX	PAGE : 2

bel COMPONENTS FOR A CONNECTED PLANET


This document is electronically generated. This is a controlled copy if used internally


THE INFORMATION CONTAINED HEREIN IS CONSIDERED "PROPRIETARY" TO BEL FUSE INC. AND SHALL NOT BE COPIED, REPRODUCED OR DISCLOSED WITHOUT THE WRITTEN APPROVAL OF BEL FUSE INC.


RoHS 2002/95/EC

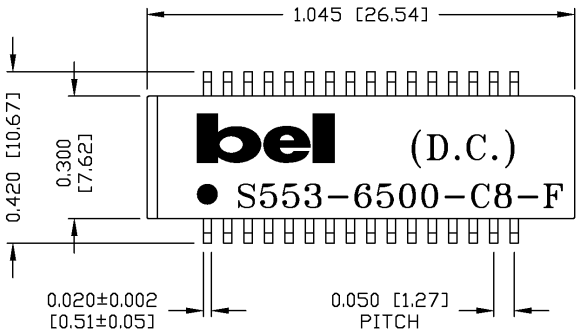

SUGGESTED PCB PAD LAYOUT

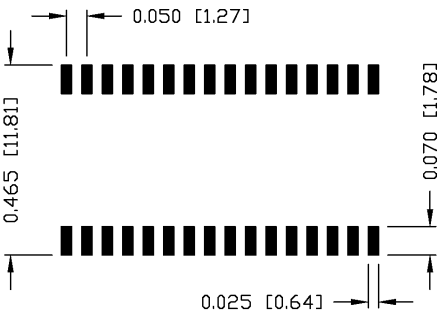

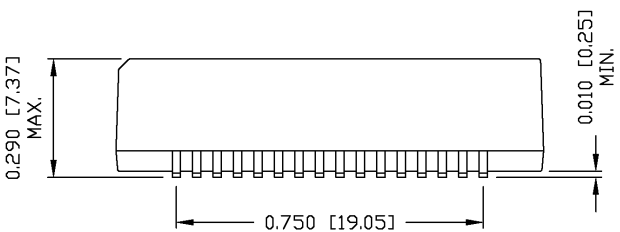

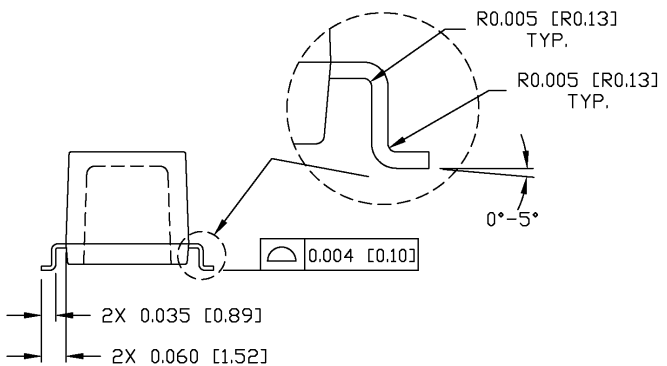

NOTES:

1. STANDARD MARKING REFER TO DOC. HAND-WORK-04.
2. PACKAGE CODE: "RDS001".

ORIGINATED BY	DATE	TITLE	PART NO. / DRAWING NO.	STANDARD DIM. TOL. IN INCH		[ ] METRIC DIM. AS REFERENCE	
HO	04-19-06	MECHANICAL DRAWING S553-6500-C8-F	X5536500C8-F	.X		UNIT : INCH [mm]	REV. : A
DRAWN BY	DATE		FILE NAME	.XX	±0.01	SCALE : N/A	SIZE : A4
DQ Chen	04-19-06		X5536500C8FA.DWG	.XXX	±0.005		PAGE : 3

bel COMPONENTS FOR A CONNECTED PLANET

This document is electronically generated. This is a controlled copy if used internally