Glass Passivated Super Fast Recovery Rectifier

COMCHIP
SMD DIODE SPECIALIST

SF16C01C-G THRU SF16C06C-G

Voltage Range 50 to 600 V

Current 16.0 Ampere


Features

- ✶ Fast switching for high efficiency
- ✶ Low forward voltage drop
- ✶ High current capability
- ✶ Low reverse leakage current
- ✶ High surge current capability

Mechanical Data

- ✶ Case: Molded plastic TO-220AB
- ✶ Epoxy: UL 94V-0 rate flame retardant
- ✶ Terminals: Solderable per MIL-STD-202 method 208
- ✶ Polarity:Color band denotes cathode
- ✶ Mounting position: Any
- ✶ Weight: 2.24 grams

TO-220AB

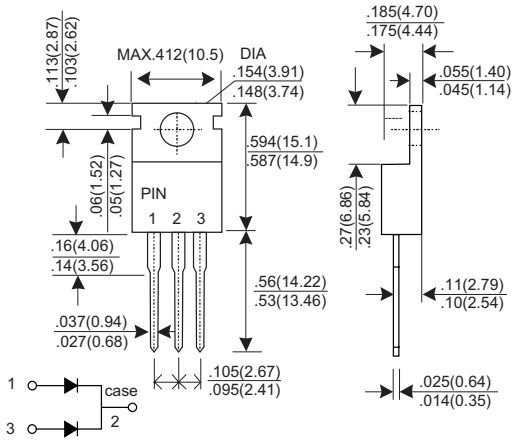

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

	SYMBOL	SF 16C01C-G	SF 16C02C-G	SF 16C03C-G	SF 16C04C-G	SF 16C05C-G	SF 16C06C-G	UNIT
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	300	400	600	V
Maximum RMS Voltage	V_{RMS}	35	70	140	210	280	420	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	300	400	600	V
Maximum Average Forward Rectified Current T_C=100°C	$I_{F(AV)}$	16.0						A
Peak Forward Surge Current, 8.3ms single Half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	200						A
Maximum Instantaneous Forward Voltage @ 8.0 A	V_F	0.95			1.3		1.5	V
Maximum DC Reverse Current @T_J=25°C At Rated DC Blocking Voltage @T_J=125°C	I_R	10.0 250						uA uA
Maximum Reverse Recovery Time (Note 1)	Trr	35			50			nS
Typical junction Capacitance (Note 2)	C_J	65						pF
Typical Thermal Resistance (Note 3)	$R_{\theta JC}$	2.2						°CW
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55 to +150						°C

NOTES : (1) Reverse recovery test conditions I_F = 0.5A, I_R = 1.0A, Irr = 0.25A.
(2) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts DC.
(3) Thermal Resistance junction to case.

COMCHIP
SMD DIODE SPECIALIST

RATINGS AND CHARACTERISTIC CURVES SF16C01C-G THRU SF16C06C-G

FIG.1 - FORWARD CURRENT DERATING CURVE

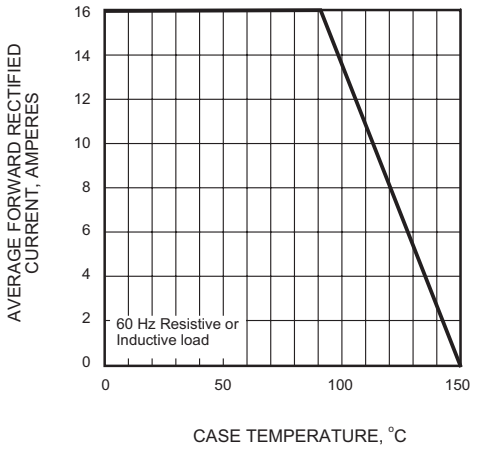


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

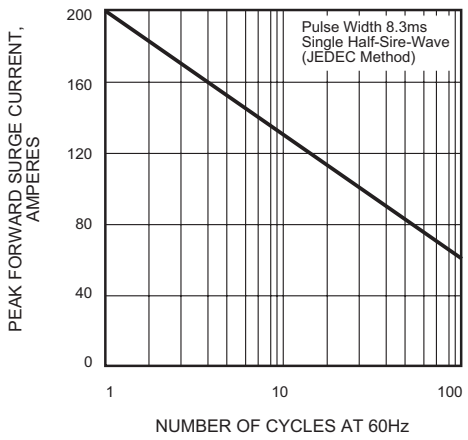


FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

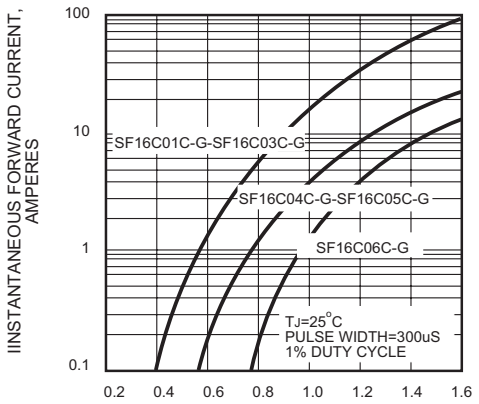


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

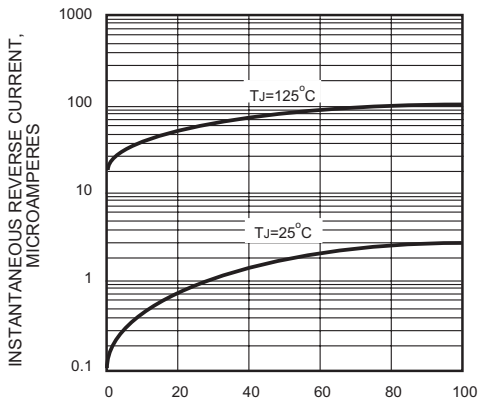


FIG.5 - TYPICAL JUNCTION CAPACITANCE

