
Product data sheet
Characteristics

8910DP22V14
Contactor, Definite Purpose, 25A, 2 pole, 24/24 VAC 50/60 Hz coil, open

Product availability : Stock - Normally stocked in distribution facility

Price* : 64.38 USD

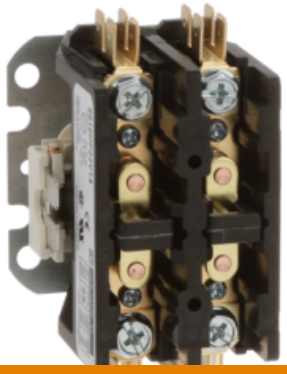

To be discontinued

Main

Product or component type	Definite Purpose Contactor
Line Rated Current	25 A
Number of Poles	2P
Pole contact composition	2 NO
Range of product	DP

Complementary

Maximum Horse Power Rating	2 hp 115 V AC, 1 phase 3 hp 230 V AC, 1 phase
Locked rotor rated current	125 A 460 V AC 100 A 575 V AC 150 A 277 V AC
[Ue] rated operational voltage	600 V AC
[Uc] control circuit voltage	24 V AC 50/60 Hz
Phase	1 phase
Electrical connection	Quick connect terminals Binder head

Environment

Product certifications	UL Recognized CSA

Ordering and shipping details

Category	21354 - 8910 DP 22
Discount Schedule	CP1B
GTIN	00785901080459

* Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Nbr. of units in pkg.	1
Package weight(Lbs)	0.6 lb(US) (0.27 kg)
Returnability	Yes
Country of origin	CN

Packing Units

Unit Type of Package 1	PCE
Package 1 Height	2.60 in (6.604 cm)
Package 1 width	3.40 in (8.636 cm)
Package 1 Length	2.30 in (5.842 cm)
Unit Type of Package 2	CAR
Number of Units in Package 2	12
Package 2 Weight	7.44 lb(US) (3.375 kg)
Package 2 Height	7.00 in (17.78 cm)
Package 2 width	5.80 in (14.732 cm)
Package 2 Length	7.00 in (17.78 cm)

Offer Sustainability

REACh Regulation	REACh Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information.

Contractual warranty

Warranty	18 months

8910DP22V14 is replaced by:



8910 Definite Purpose Contactors 8910DP32V14

Contactor, Definite Purpose, 30A, 2 pole, 24/24 VAC 50/60 Hz coil, open

Qty 1

Reason for Substitution: End of life | Substitution date: 02 June 2020