


Electrical Test:
 1. 100% short, open, miswire test
 2. Contact Resistance: 2Ω Max.
 3. Insulation Resistance: 5Ω Min.

⑤	OUTER MOLD: PVC 45P COLOR BEIGE(CS-B02)
④	INNER MOLD: PE COLOR TRANSPARENT
③	CONNECTOR: USB A JACK SOLDER TYPE INSULATION: WHITE.
②	CONNECTOR: USB A PLUG SOLDER TYPE INSULATION: WHITE.
①	CABLE: UL2725 28AWG*1P+24AWG*2C+A.D+B65% O.D:4.7MM PVC JACKET COLOR BEIGE(CS-B02)
NO.	DESCRIPTION



Scale	1:1					Name	Item No. AK669-18-R (1.8 Meters) AK669-30-R (3.0 Meters) AK669-50-R (5.0 Meters)
TOLERANCE					Drawn	08.29.11	
X.X	±0.40				Approved		Title USB Extention Cable Version 1.1, USB A Male to USB A Female
X.XX	±0.25						
X.XXX	±0.15						Drawing No.
Angle	±3°						rev00
							Replace
							Sheet

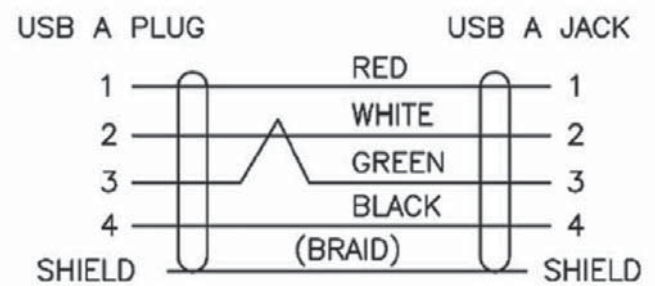