


ISSUE 1; April 2016

### Description

- The CXOXULP 32.768kHz oscillator achieves the low power comparable with a tuning fork design and the fast start up and tight frequency stability attained by an AT-cut crystal design. Designed for applications requiring ultra low current (15µA), fast start up time (15ms) and a tight frequency stability ( $\pm 30\text{ppm}$  to  $\pm 100\text{ppm}$ ) over a wide temperature range ( $-55^\circ\text{C}$  to  $+125^\circ\text{C}$ ). These oscillators are also capable of withstanding significantly higher shock than a standard tuning fork design.
- SM1 Gold Plated (RoHS)
- SM5 Solder Dipped (RoHS)
- FEATURES:
  - Ultra low current (typical 15µA)
  - Fast start up (typical 15ms)
  - Tight tolerance
  - High shock resistance
  - Low ageing
  - CMOS output
  - Optional Output Enable/Disable with Tri-State
  - Low EMI emission
  - Hermetically sealed ceramic package
  - Full military testing available
- APPLICATIONS:
  - Military, Aerospace & Avionics
  - Communications
  - Navigation
  - GPS
  - Industrial, Computer & Communications
  - Miniature clock oscillator
  - Handheld instrumentation
  - Transponder/Animal migration
  - Medical
  - Test & diagnostic equipment
  - Handheld devices
- Please note that all data is only valid at  $25^\circ\text{C}$  unless otherwise stated.



Outline (mm) SM1 = Gold Plated (RoHS)

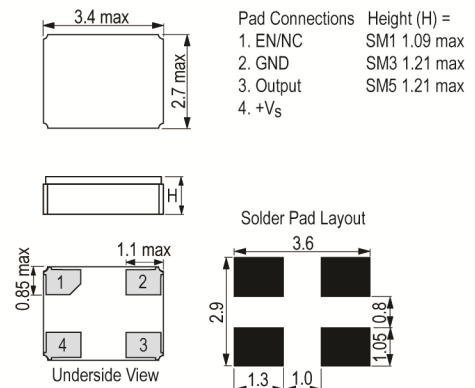

### Frequency Parameters

- Frequency: 32.768kHz
- Frequency Tolerance:  $\pm 25.00\text{ppm}$
- Tolerance Condition: @  $25^\circ\text{C}$
- Frequency Stability:  $\pm 10.00\text{ppm}$  to  $\pm 100.00\text{ppm}$
- Ageing:  $\pm 5\text{ppm}$  max in 1st year
- Frequency Stability does not include Frequency Tolerance @  $25^\circ\text{C}$
- All parameters are measured at ambient temperature with a 10MΩ, 15pF load
- Note: Other Frequency Tolerances and Stabilities are available - please contact an IQD Sales Office

### Electrical Parameters

- Supply Voltage: 3.3V  $\pm 10\%$
- Supply Current (typical): 15µA
- Supply Voltage (absolute maximum rating): -0.3V to 5.0V

### Operating Temperature Ranges

- -10 to  $70^\circ\text{C}$
- -40 to  $85^\circ\text{C}$
- -55 to  $125^\circ\text{C}$

### Sales Office Contact Details:

UK: +44 (0)1460 270200

France: 0800 901 383

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)

Germany: 0800 1808 443

USA: +1.760.318.2824

Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)

#### Output Details

- Output Compatability CMOS
- Drive Capability 15pF
- Output Level High Voh: 90%Vs min  
Output Level Low Vol: 10%Vs max
- Rise Time (10%-90%): 85ns typ, 160ns max  
Fall Time (90%-10%): 45ns typ, 100ns max

#### Output Control

- Start Up Time: 15ms typ

#### Environmental Parameters

- Shock: 5000G, 0.3ms, 1/2 sine  
(Note: Higher Shock versions are available - please contact an IQD Sales Office)
- Vibration: MIL-STD-202G, Method 204D, Condition D: 20G, 10Hz-2000Hz swept sine  
(Note: Random Vibration test is also available - please contact an IQD Sales Office)
- Storage Temperature Range: -55 to 125°C

#### Manufacturing Details

- Solder Process Temperature: 260°C max for 20sec max

#### Ordering Information

- Frequency\*  
Model\*  
Termination Variant\*  
Output  
Frequency Tolerance (@ 25°C)\*  
Frequency Stability\*  
Operating Temperature Range\*  
Pad 1 Function\*  
(minimum required\*)
- Termination Variants:  
SM1 = Gold Plated  
SM5 = Solder Dipped  
(Note: Non-RoHS compliant terminations also available - please contact an IQD Sales Office)
- Pad 1 Function Options:  
EN = Enable/Disable  
NC = No connection
- Example  
32.768kHz CXOXULP 3.3V SM1  
CMOS ±25ppm ±100ppm -40 to 85C NC

#### Compliance

- RoHS Status (2011/65/EU) Optional
- REACh Status Compliant
- MSL Rating (JDEC-STD-033): Not Applicable

#### Packaging Details

- Pack Style: Tray Supplied on a tray  
Pack Size: 1
- Pack Style: Reel Tape & reel in accordance with EIA-481-D  
Pack Size: 1,000

#### Sales Office Contact Details:

UK: +44 (0)1460 270200  
Germany: 0800 1808 443

France: 0800 901 383  
USA: +1.760.318.2824

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)  
Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)

Electrical Specification - maximum limiting values 3.30V  $\pm$ 10%

Frequency	Temperature Range	Stability (Min)	Current Draw	Rise and Fall Time	Duty Cycle
	°C	ppm	mA	ns	%
32.768000kHz	-55 to 125	$\pm$ 50.00	-	-	45/55%
	-40 to 85	$\pm$ 20.00	-	-	45/55%
	-10 to 70	$\pm$ 10.00	-	-	45/55%

*This document was correct at the time of printing; please contact your local sales office for the latest version.*

[Click to view latest version on our website.](#)

**Sales Office Contact Details:**

UK: +44 (0)1460 270200

France: 0800 901 383

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)

Germany: 0800 1808 443

USA: +1.760.318.2824

Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)