




W005MG THRU W10MG

MINIATURE SINGLE PHASE 1.5 AMPS.

GLASS PASSIVATED BRIDGE RECTIFIERS




FEATURES

- * Glass passivated junction
- * Surge overload ratings to 30 amperes peak
- * Ideal for printed circuit board
- * Reliable low cost construction technique results in inexpensive product

VOLTAGE RANGE

50 to 1000 Volts
CURRENT
1.5 Amperes

WOB

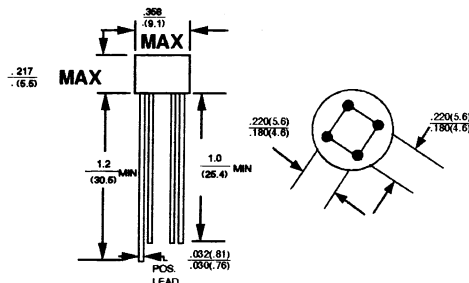

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

TYPE NUMBER	SYMBOLS	W 005MG	W 01MG	W 02MG	W 04MG	W 06MG	W 08MG	W 10MG	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Bridge Input Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum D.C Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current @ $T_A = 50^\circ\text{C}$	$I_{F(AV)}$	1.5							A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	50							A
Maximum Forward Voltage Drop per element @ 1.0A	V_F	1.10							V
Maximum Reverse Current at Rated @ $T_A = 25^\circ\text{C}$ D.C. Blocking Voltage per element @ $T_A = 125^\circ\text{C}$	I_R	10 500							μA μA
Operating Temperature Range	T_J	-55 to +150							$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 to +150							$^\circ\text{C}$

RATINGS AND CHARACTERISTIC CURVES (W005MG THRU W10MG)

FIG.1 - MAXIMUM NON - REPEITITIVE PEAK FORWARD SURGE CURRENT - PER ELEMENT

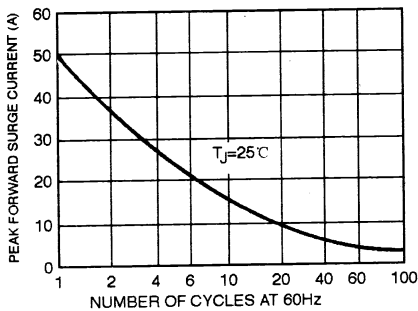


FIG.2 - TYPICAL FORWARD OUTPUT CURRENT DERATING CURVE

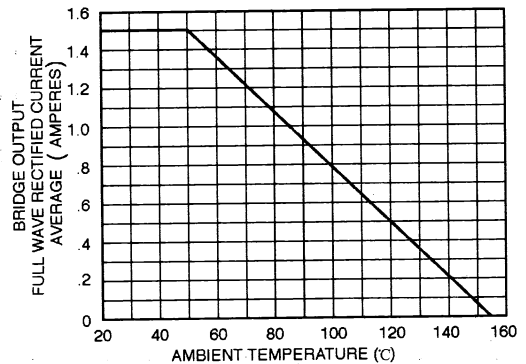


FIG.3 - TYPICAL FORWARD CHARACTERISTICS - PER ELEMENT

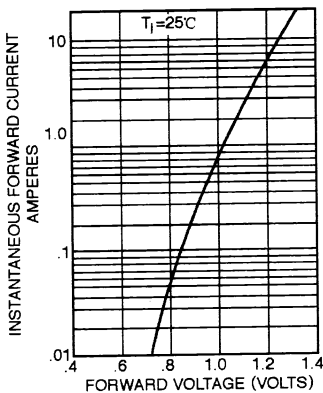


FIG.4 - TYPICAL REVERSE CHARACTERISTICS PER ELEMENT

