

1

2

3

4

5

6

7

A

A

B

B

C

C

D





D

E

E

F

F

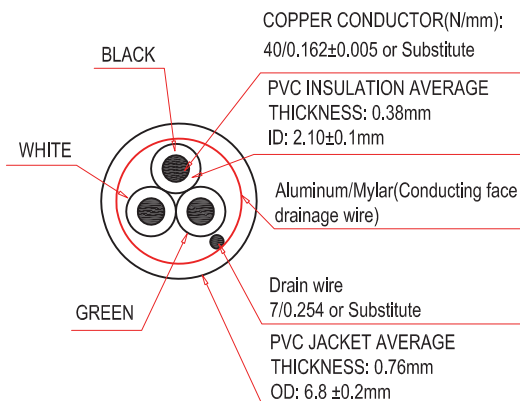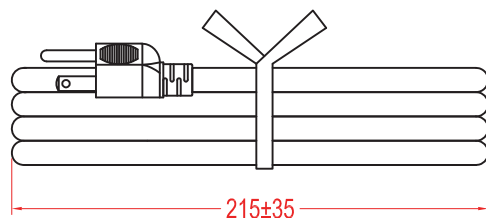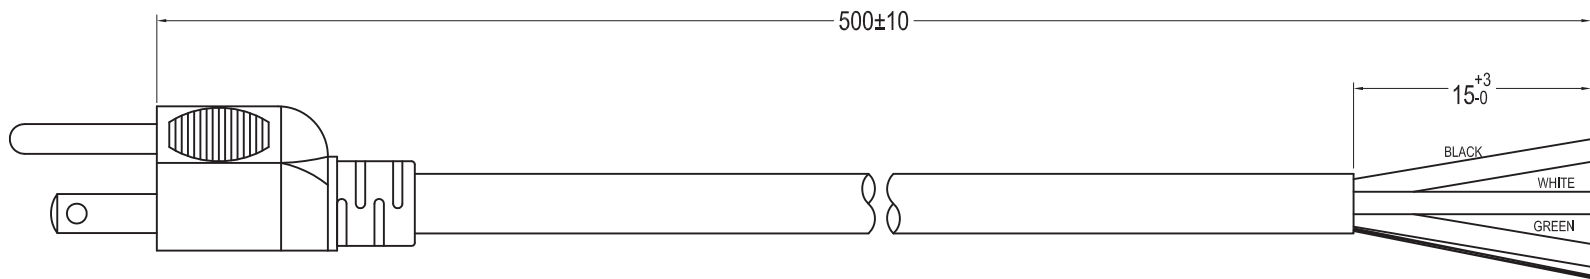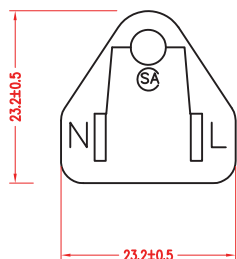

Material:

- SVT 3x18AWG(0.824MM<sup>2</sup>) VW-1 Shielded, 105° 300V
- Jacket Color: Black
- E- Green; L- Black; N- White

Electrical Test :

- 100% Open & Short Testing
- Insulation Resistance : 100meg-ohm(Min.)
- Voltage : 500V DC / 1 Min.

Unit: mm



Scale	Free					Date	Name
TOLERANCE					Drawn	27.12.11	Chappell
X.	±X				Approved	21.06.13	Groll
X.X	±X						
X.XX	±X						
DIM	TOL						
X.°	±X°						
X.X°	±X°	①	Updated all information	21.06.13	Wilson		
Angle	TOL	Id.	Modification	Date	Name		

Title	
Power cord - Plug ⇔ Open End	
SVT, 18AWG, 105°C, Shielded, 0.5 meter	
ASSMANN WSW-No.	
AK500-OE-7-0.5-R	
Drawing-No.	rev01
Replace	Sheet 1/1

1

2

3

4

5

6

7

H

H