
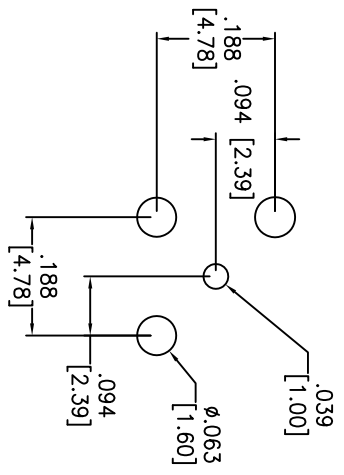
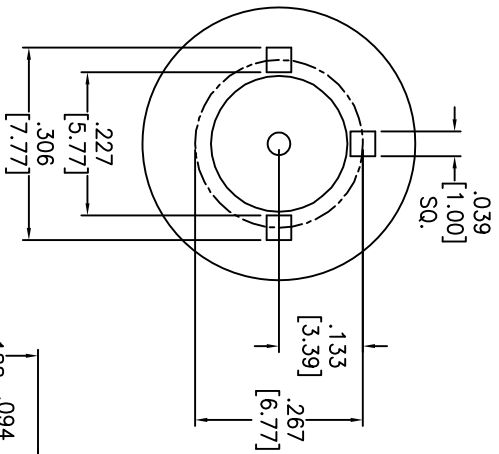


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/02/09	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

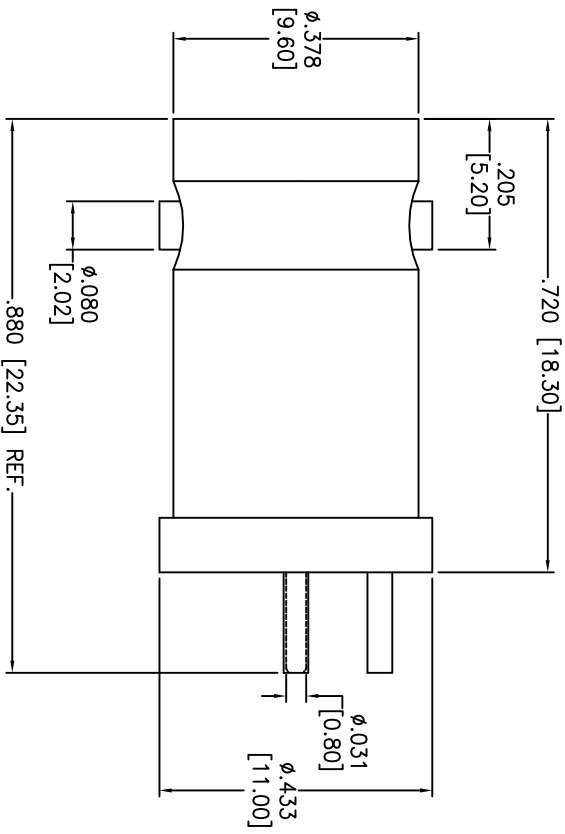

LOCK WASHER	BRASS	NICKEL
INSULATOR	TEFLON	NONE
CONTACT PIN	PHOSPHOR BRONZE	GOLD
BODY	BRASS	NICKEL
DESCRIPTION	MATERIAL	FINISH

**SPECIFICATIONS:**

Electrical:  
 Nominal Impedance: 50 ohms  
 Frequency range: 0-4 GHz  
 Working Voltage: 500 VRMS max.  
 Dielectric Withstanding Voltage: 1500 VRMS min.  
 Contact Resistance: 3 Milliohms max. (Center Contact)  
 2 Milliohms max. (Outer Contact)  
 Insulator Resistance: 5000 Megohms min.  
 Environmental:  
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED  
 INCHES                    Holes  
 .X                    ±.10                    Ø.X  
 .XX                    ±.020                    Ø.XX  
 .XXX                    ±.015                    Ø.XXX  
 .XXXX                    ±.010

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE	BNC FEMALE, PCB MOUNT, 75 OHM		
DRAWN	DY	DATE	10/02/09
CHECKED			
APPROVED			
SIZE	PART NO.	REV.	
X	RF1-500-8		
REF:	S00064T	SCALE:	NIS
		SHEET	1 OF 1