



MODEL NUMBER
DSW22023

GaAs SP2T


FEATURES

- 20-550 MHz
- Low Insertion Loss
- Low VSWR
- Broad Frequency Range
- Low DC Power

SP2T

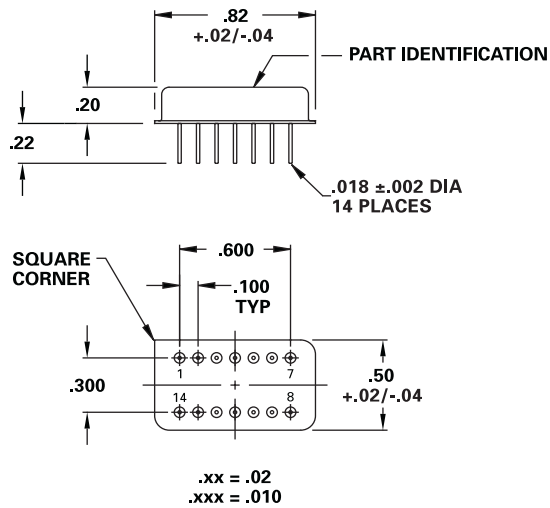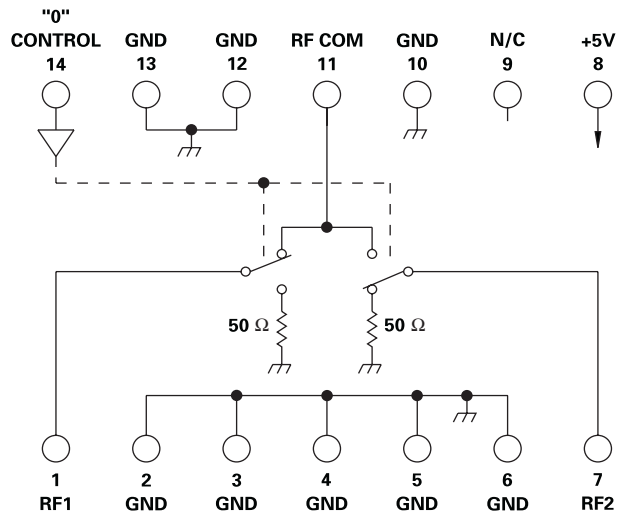

N/C = NO INTERNAL CONNECTION

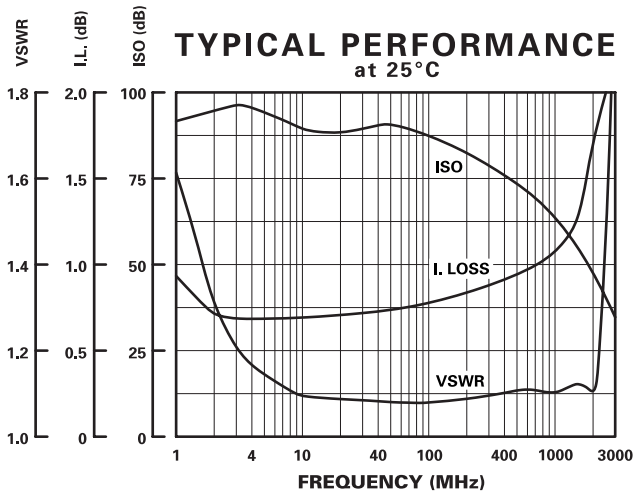

LOGIC TABLE

CONTROL LINE	RF PATH
"0"	RF COM TO RF 1 (PIN 11 TO PIN 1)
"1"	RF COM TO RF 2 (PIN 11 TO PIN 7)

GUARANTEED PERFORMANCE

Parameter	Min	Typ	Max	Units	Conditions
Operating Frequency	20		550	MHz	
DC Current		0.2	5	mA	At +5 VDC Supply
Control Type		TTL			1 Line "0" = Pin 11 To Pin 1 "1" = Pin 11 To Pin 7
Control Current	<i>High</i> <i>Low</i>	± 0.1 ± 0.1		μ A μ A	$V_{IH} = +2.7V$ $V_{IL} = +0.5V$
Isolation	55	72		dB	
Insertion Loss		0.90	1.3	dB	
VSWR	<i>Thru</i> <i>Termination</i>	1.11/1 1.06/1	1.3/1 2/1		
Impedance		50		OHMS	
Switching Speed		0.25	6	μ Sec	50% TTL to 90% / 10% RF
Transition (Rise/Fall) Time		20		nSec	10% / 90% or 90% / 10% RF
Switching (Video) Transients		40		mV	Peak Value
Intercept Points	<i>2nd</i> <i>3rd</i>	+82 +50		dBm dBm	70 MHz / 50 MHz 35 MHz / 50 MHz
RF Power	<i>Operate</i> <i>No Damage</i>	+19	+5 +30	dBm dBm	0.1 dB Compression
Operating Temperature	-55	+25	+125	$^{\circ}$ C	TA