

40V N+P-CHANNEL ENHANCEMENT MODE MOSFET

MAIN CHARACTERISTICS

I_D	8.3A
V_{DSS}	40V
R_{DSON}-typ(@V_{GS}=10V)	< 26mΩ(Type:18 mΩ)
I_D	-6.3A
V_{DSS}	-40V
R_{DSON}-typ(@V_{GS}=-10V)	< 50mΩ(Type:42 mΩ)





SOP-8

Pb lead-free ROHS

Application

- Wireless charging
- Boost driver
- Brushless motor

Product Specification Classification

Part Number	Package	Marking	Pack
YFW8G04S	SOP-8	YFW 8G04S XXXXX	3000PCS/Tape

Maximum Ratings at Tc=25°C unless otherwise specified

Characteristics	Symbols	Value		Units
		N-Ch	P-Ch	
Drain-Source Voltage	VDS	40	-40	V
Gate - Source Voltage	VGS	±20	±20	V
Continuous Drain Current, V_{GS} @ 10V[1]@T_A=25℃	I_D	8.3	6.3	A
Continuous Drain Current, V_{GS} @ 10V[1]@T_A=70℃	I_D	4.2	-3.8	A
Pulsed Drain Current[2]	I_{DM}	26	-24	A
Single Pulse Avalanche Energy[3]	E_{AS}	16.2	39	mJ
Total Power Dissipation[4]@T_A=25℃	P_D	1.67	1.67	W
Storage Temperature Range	T_{STG}	-55 to +150		°C
Operating Junction Temperature Range	T_J	-55 to +150		°C
Thermal Resistance Junction-Ambient [1]	$R_{\theta JA}$	57		°C/W
Thermal Resistance Junction-Case[1]	$R_{\theta JC}$	30		°C/W

Download from alldatasheet.com

N-Channel Electrical Characteristics (TJ=25 ℃, unless otherwise noted)

Characteristics	Test Condition	Symbols	Min	Typ	Max	Units
Drain-Source Breakdown Voltage	V_{GS}=0V, I_D=250uA	BV_{DSS}	40	44	-	V
BVDSS Temperature Coefficient	Reference to 25℃ , I_D=1mA	$\Delta BV_{DSS/\Delta TJ}$	-	0.034	-	V/℃
Static Drain-Source On-Resistance[2]	V_{GS}=10V, I_D=5A	$R_{DS(ON)}$	-	18	26	mΩ
	V_{GS}=4.5V, I_D=4A		-	25.0	35	
Gate Threshold Voltage	V_{DS}=V_{GS}, I_D=250uA	$V_{GS(th)}$	1.2	1.6	2.5	V
$V_{GS(th)}$ Temperature Coefficient		$\Delta V_{GS(th)}$	-	-4.56	-	mV/℃
Drain-Source Leakage Current	V_{DS}=32V, V_{GS}=0V T_J=25℃	I_{DSS}	-	-	1	uA
	V_{DS}=32V , V_{GS}=0V , T_J=55℃		-	-	5	
Gate-Source Leakage Current	V_{GS}=±20V, V_{DS}=0V	I_{GSS}	-	-	±100	nA
Forward Transconductance	V_{DS} = 5V, I_D = 5A	g_{fs}	-	14	-	S
Gate Resistance	V_{DS}=0V , V_{GS}=0V , f=1MHz	R_g	-	2.6	-	Ω
Total Gate Charge(4.5V)	V_{DS}=20V V_{GS}=4.5V I_D=5A	Q_g	-	5.5	-	nC
Gate-Source Charge		Q_{gs}	-	1.25	-	
Gate-Drain Charge		Q_{gd}	-	2.5	-	
Turn-on delay time	V_{DD} =20V V_{GS}=10V R_G = 3.3Ω I_D= 1A	$t_{d(on)}$	-	8.9	-	ns
Rise Time		T_r	-	2.2	-	
Turn-Off Delay Time		$t_{d(OFF)}$	-	41	-	
Fall Time		t_f	-	2.7	-	
Input Capacitance	V_{DS}=15V V_{GS}=0V f=1MHz	C_{iss}	-	593	-	pF
Output Capacitance		C_{oss}	-	76	-	
Reverse Transfer Capacitance		C_{rss}	-	56	-	
Continuous Source Current[1,5]	V_G=V_D=0V , Force Current	I_S	-	-	6.1	A
Pulsed Source Current[2,5]		I_{SM}	-	-	23	A
Diode Forward Voltage[2]	V_{GS}=0V , I_S=1A , T_J=25℃	V_{SD}	-	-	1.2	V

Note :
1、The data tested by surface mounted on a 1 inch^2 FR-4 board with 2OZ copper.
2、The data tested by pulsed , pulse width ≦ 300us , duty cycle ≦ 2%
3、The EAS data shows Max. rating . The test condition is V_{DD}=25V,V_{GS}=10V,L=0.1mH,I_{AS}=10A
4、The power dissipation is limited by 150℃ junction temperature
5 、The data is theoretically the same as I_D and I_{DM} , in real applications , should be limited by total power dissipation.

Download from alldatasheet.com

P-Channel Electrical Characteristics (TJ=25 ℃, unless otherwise noted)

Characteristics	Test Condition	Symbols	Min	Typ	Max	Units
Drain-Source Breakdown Voltage	V_{GS}=0V, I_D=-250uA	BV_{DSS}	-40	-	-	V
BVDSS Temperature Coefficient	Reference to 25℃ , I_D=-1mA	$\Delta BV_{DSS/\Delta TJ}$	-	-0.02	-	V/℃
Static Drain-Source On-Resistance[2]	V_{GS}=-10V, I_D=-5A	$R_{DS(ON)}$	-	42	50	mΩ
	V_{GS}=-4.5V, I_D=-3A		-	48	60	
Gate Threshold Voltage	V_{DS}=V_{GS}, I_D=-250uA	$V_{GS(th)}$	-1.0	-1.6	-2.5	V
$V_{GS(th)}$ Temperature Coefficient		$\Delta V_{GS(th)}$	-	3.72	-	mV/℃
Drain-Source Leakage Current	V_{DS}=-32V, V_{GS}=0V T_J=25℃	I_{DSS}	-	-	1	uA
	V_{DS}=-32V , V_{GS}=0V , T_J=55℃		-	-	5	
Gate-Source Leakage Current	V_{GS}=±20V, V_{DS}=0V	I_{GSS}	-	-	±100	nA
Total Gate Charge(-4.5V)	V_{DS}=-20V V_{GS}=-4.5V I_D=-6A	Q_g	-	15.8	-	nC
Gate-Source Charge		Q_{gs}	-	3.5	-	
Gate-Drain Charge		Q_{gd}	-	3.2	-	
Turn-on delay time	V_{DD} =-15V V_{GS}=-10V R_G = 3.3Ω I_D=-1A	$t_{d(on)}$	-	5.2	-	ns
Rise Time		T_r	-	7	-	
Turn-Off Delay Time		$t_{d(OFF)}$	-	23	-	
Fall Time		t_f	-	8	-	
Input Capacitance	V_{DS}=-15V V_{GS}=0V f=1MHz	C_{iss}	-	1000	-	pF
Output Capacitance		C_{oss}	-	160	-	
Reverse Transfer Capacitance		C_{rss}	-	100	-	
Continuous Source Current[1,5]	V_G=V_D=0V , Force Current	I_S	-	-	-5.7	A
Diode Forward Voltage[2]	V_{GS}=0V , I_S=-1A , T_J=25℃	V_{SD}	-	-	-1.2	V

Note :
1、The data tested by surface mo unted on a 1 inch^2 FR-4 board with 2OZ copper.
2、The data tested by pulsed , pulse width ≦ 300us , duty cycle ≦ 2%
3、The EAS data shows Max. rating . The test condition is V_{DD}=-25V,V_{GS}=-10V,L=0.1mH,I_{AS}=-7A
4、The power dissipation is limited by 150℃ junction temperature
5 、The data is theoretically the same as I_D and I_{DM} , in real applications , should be limited by total power dissipation.

Download from alldatasheet.com

Ratings and Characteristic Curves

N-Channel Typical Characteristics

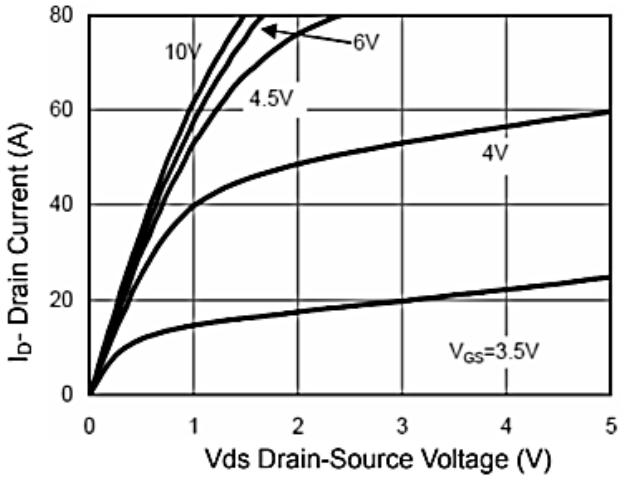


Figure 1 Output Characteristics

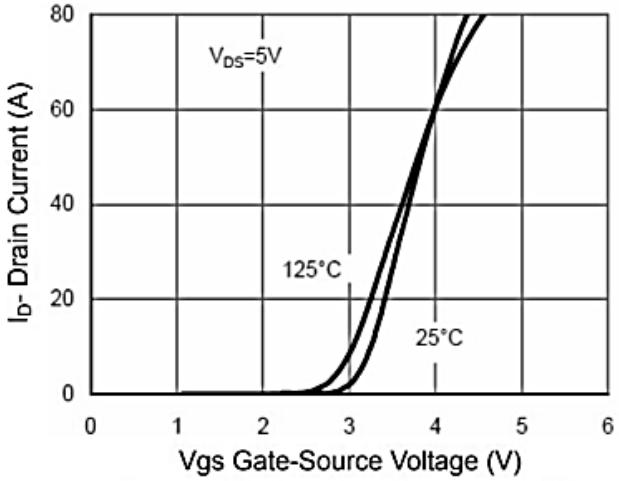


Figure 2 Transfer Characteristics

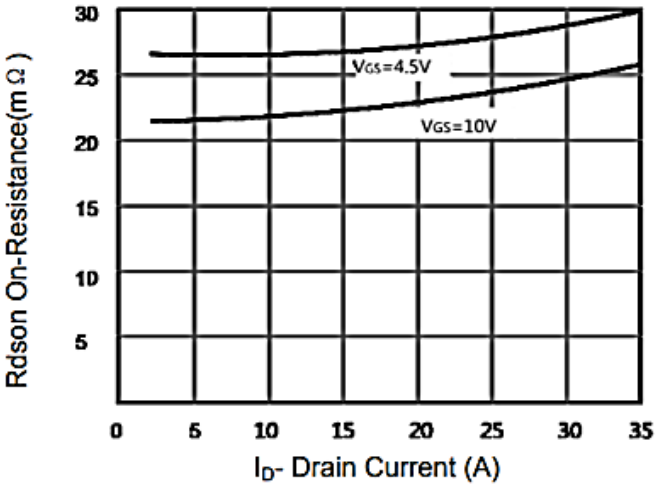


Figure 3 Rdson- Drain Current

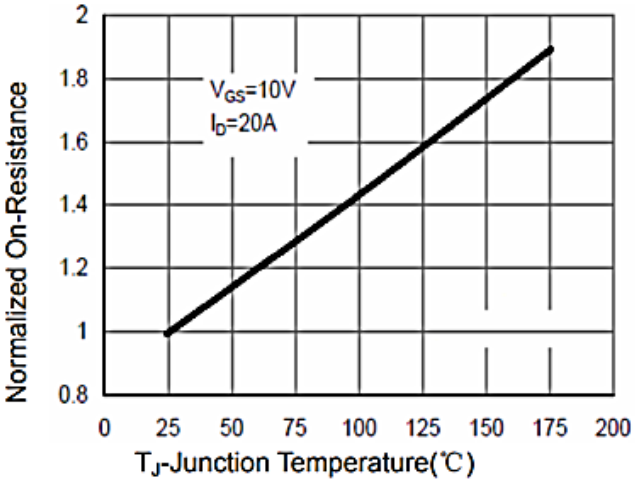


Figure 4 Rdson-JunctionTemperature

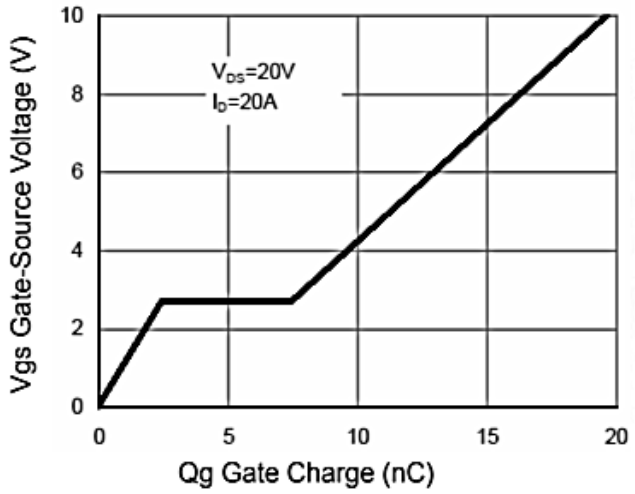


Figure 5 Gate Charge

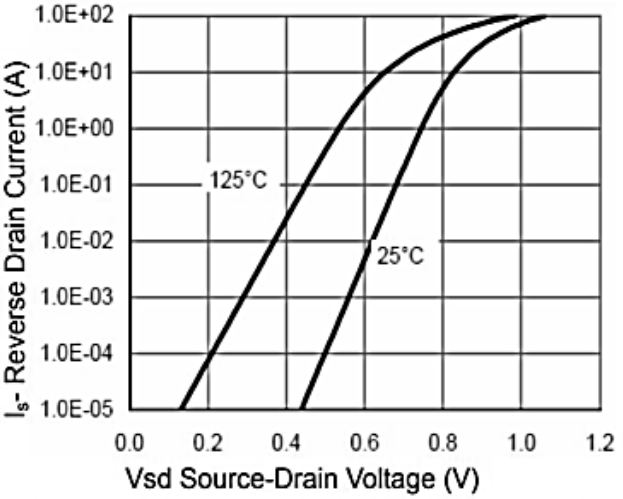


Figure 6 Source- Drain Diode Forward

Download from alldatasheet.com

Ratings and Characteristic Curves

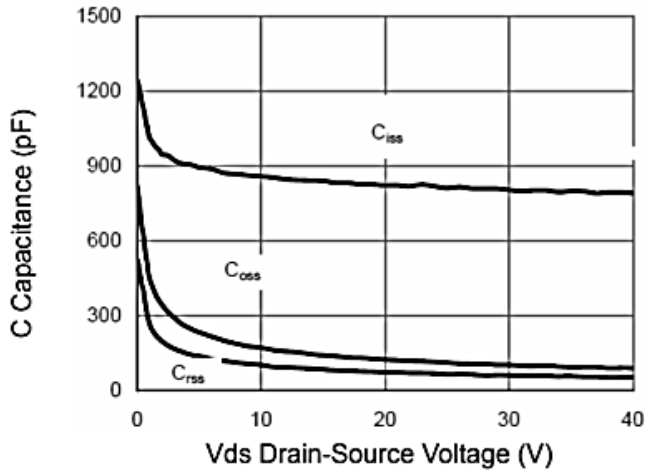


Figure 7 Capacitance vs Vds

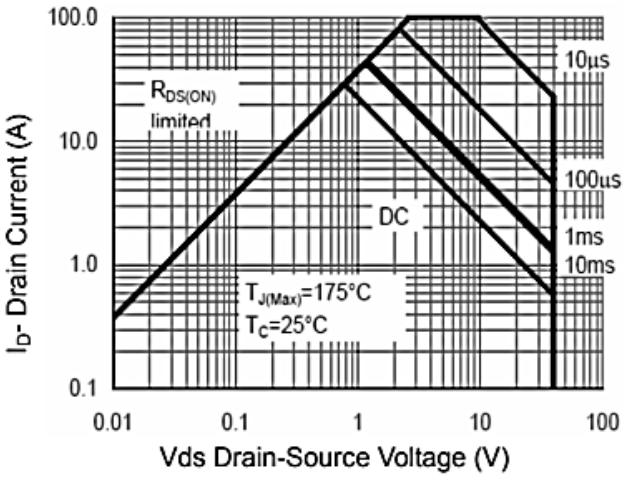


Figure 8 Safe Operation Area

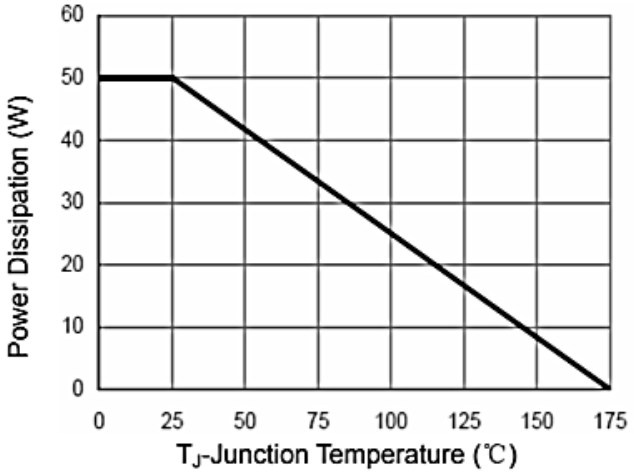


Figure 9 Power De-rating

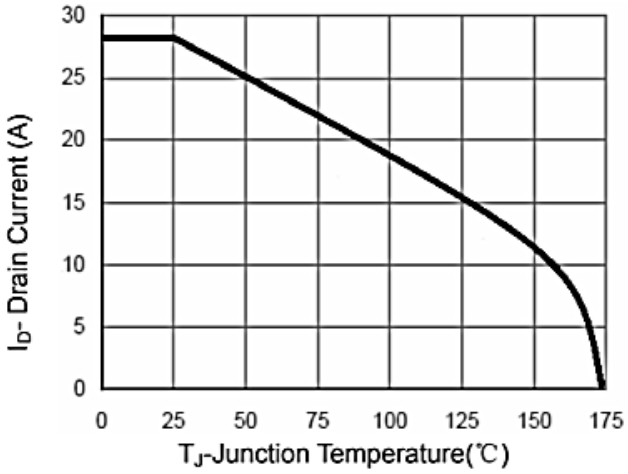


Figure 10 I_D Current De-rating

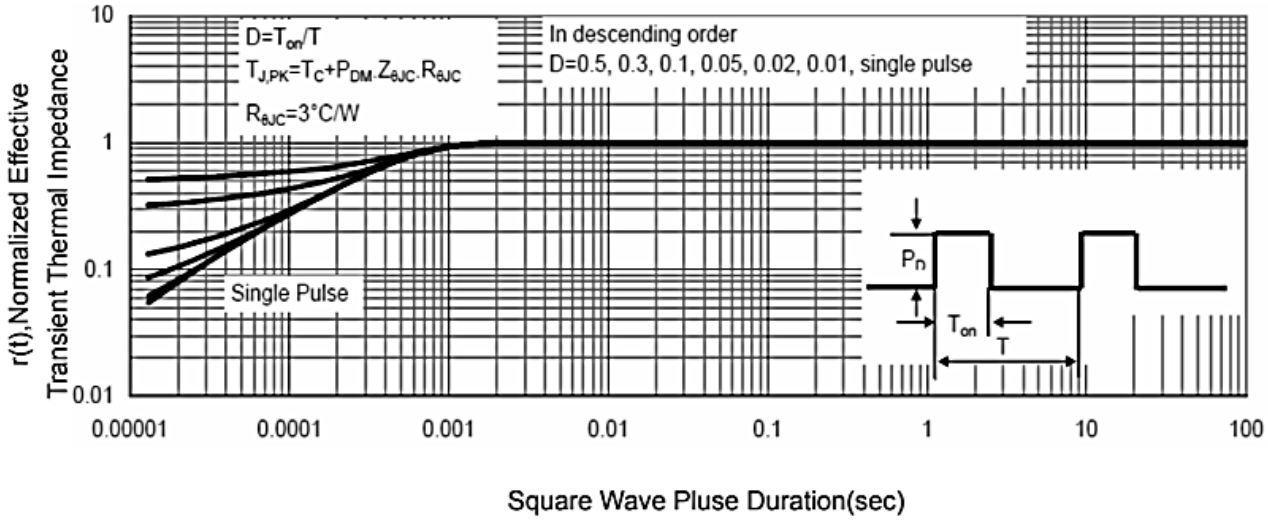


Figure 11 Normalized Maximum Transient Thermal Impedance

Download from alldatasheet.com

Ratings and Characteristic Curves

P-Channel Typical Characteristics

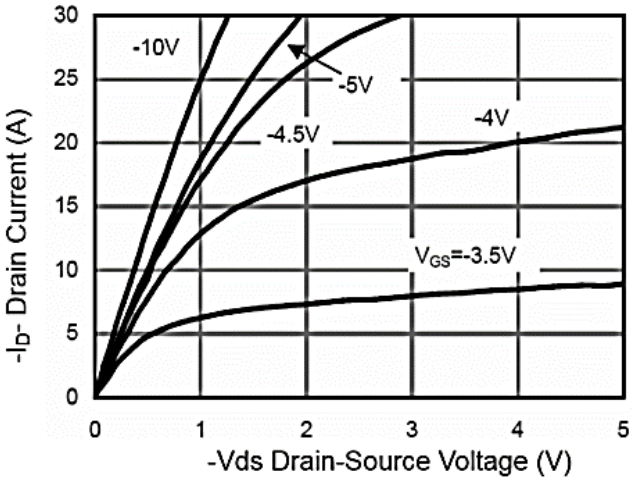


Figure 1 Output Characteristics

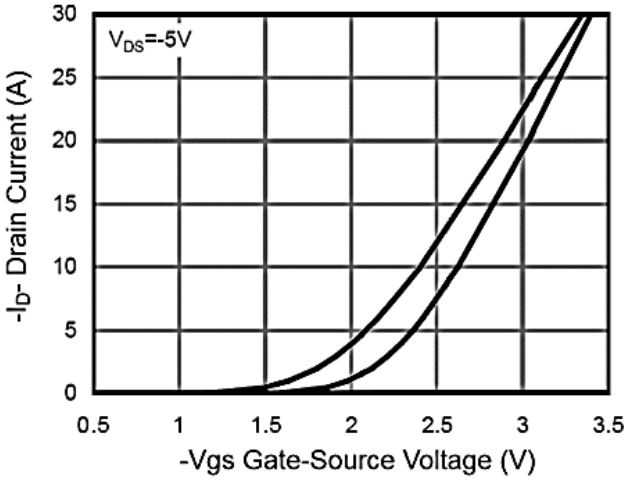


Figure 2 Transfer Characteristics

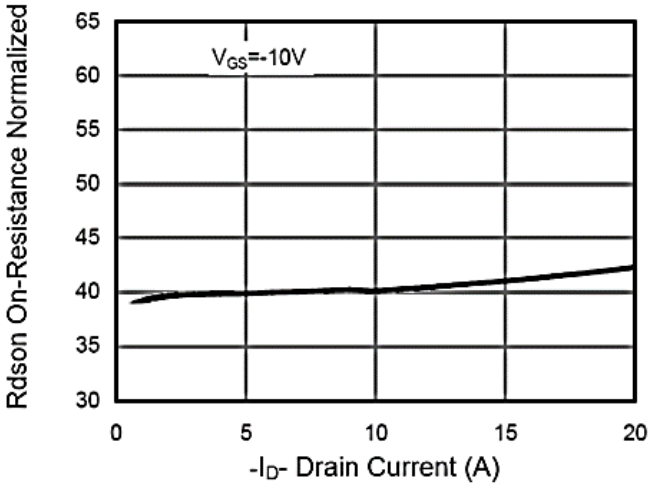


Figure 3 Rdson- Drain Current

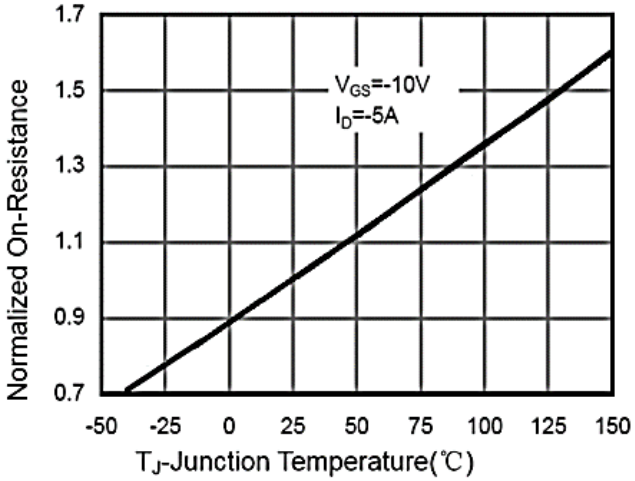


Figure 4 Rdson-Junction Temperature

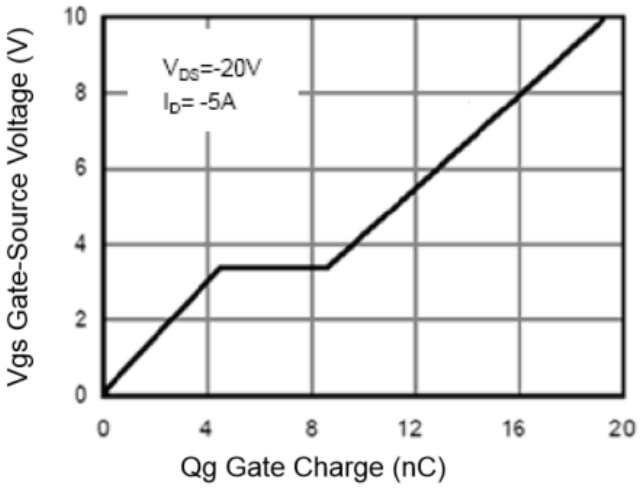


Figure 5 Gate Charge

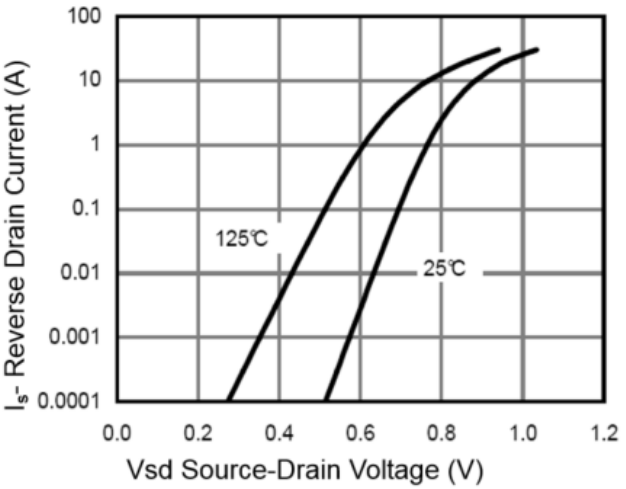


Figure 6 Source- Drain Diode Forward

Download from alldatasheet.com

Ratings and Characteristic Curves

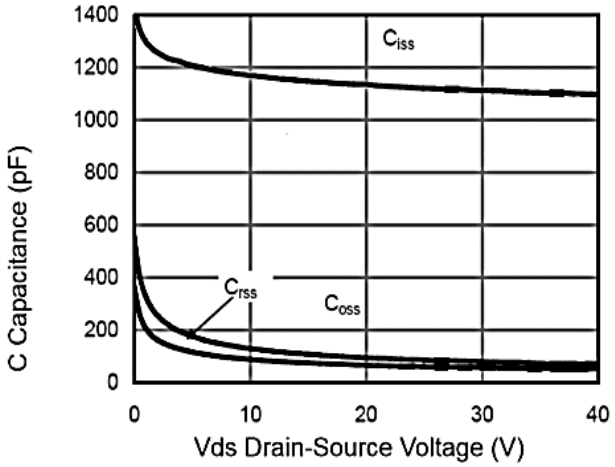


Figure 7 Capacitance vs Vds

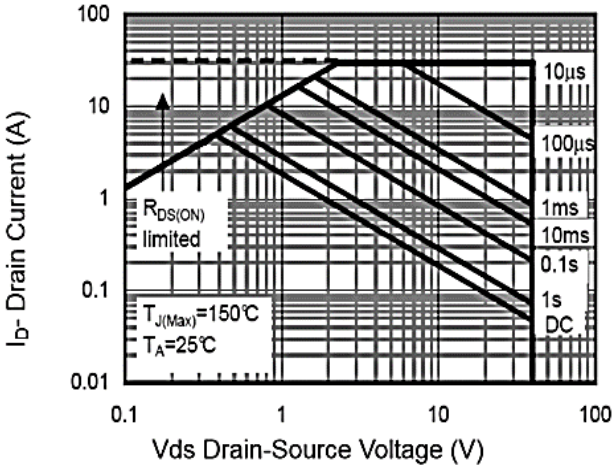


Figure 8 Safe Operation Area

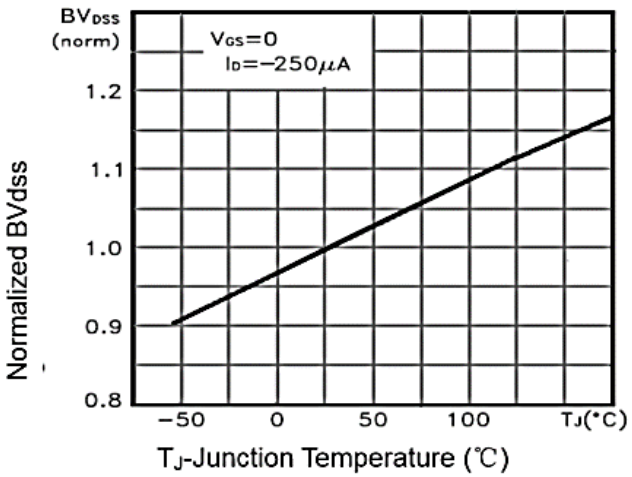


Figure 9 BV_{DSS} vs Junction Temperature

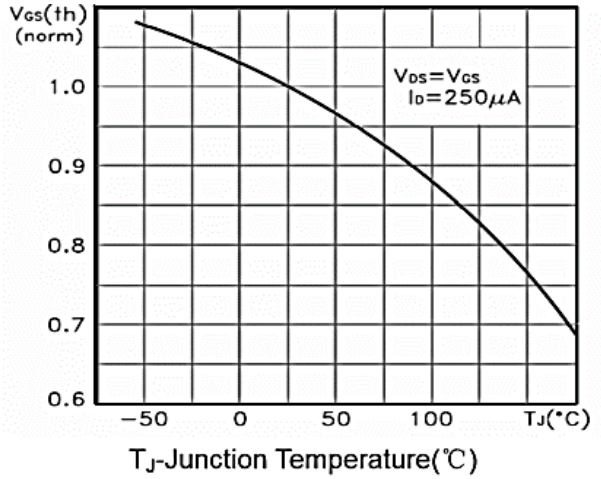


Figure 10 $V_{GS(th)}$ vs Junction Temperature


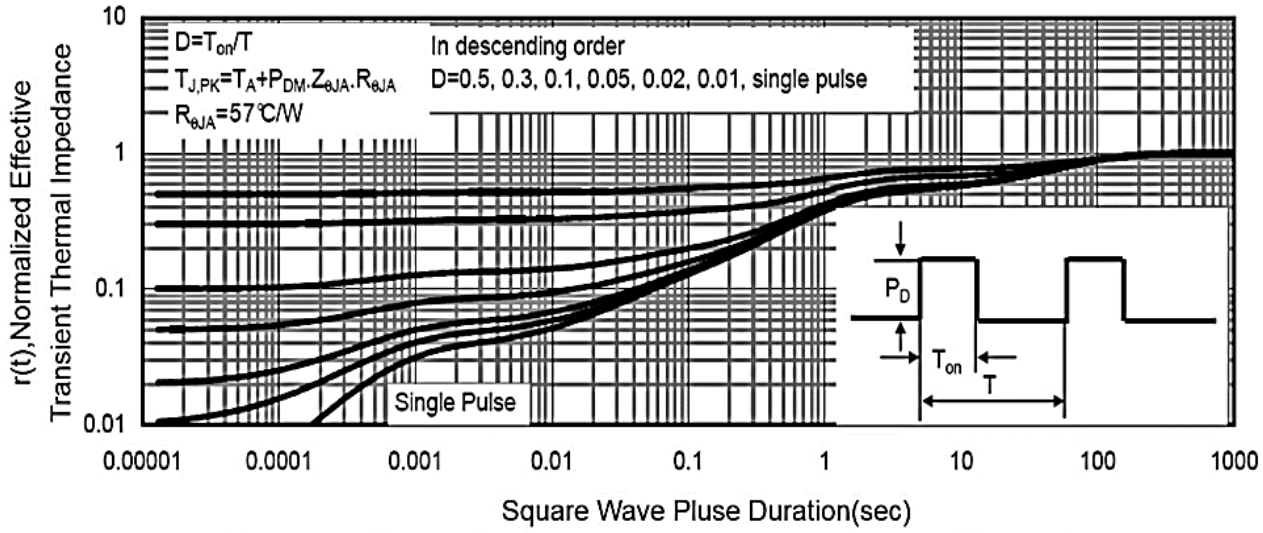


Figure 11 Normalized Maximum Transient Thermal Impedance


Download from alldatasheet.com

Package Outline Dimensions Millimeters

SOP-8

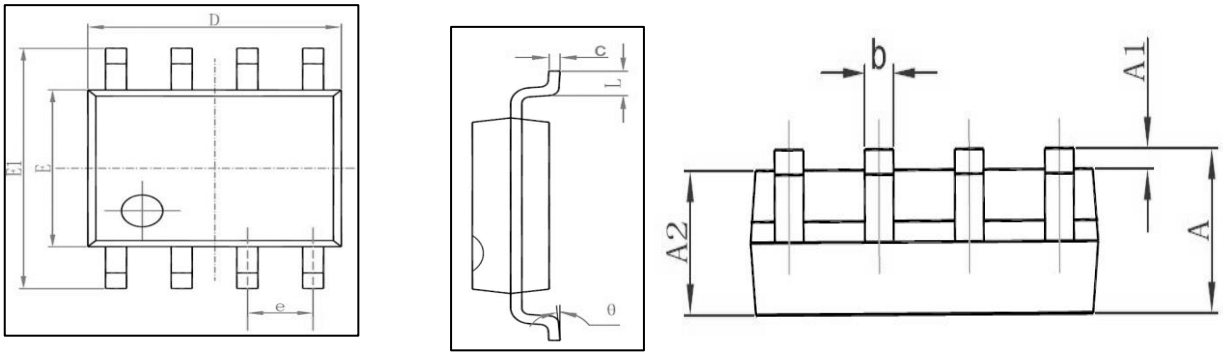

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.350	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.006	0.010
D	4.700	5.100	0.185	0.200
E	3.800	4.000	0.150	0.157
E1	5.800	6.200	0.228	0.244
e	1.270 (BSC)		0.050 (BSC)	
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°

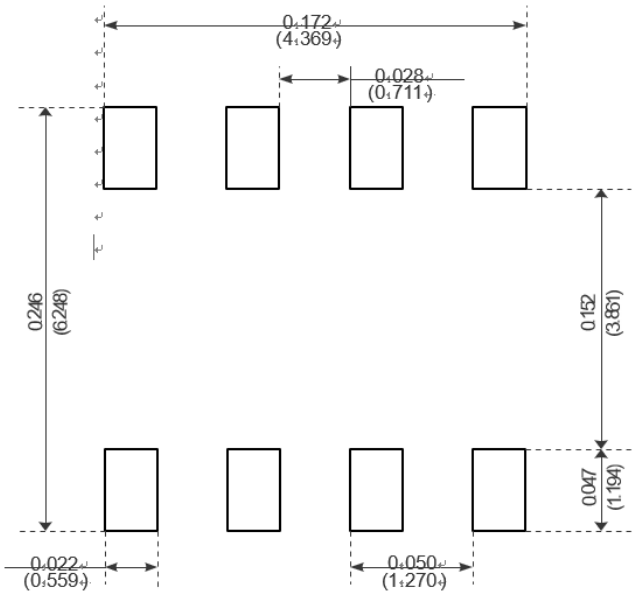

Recommended Minimum Pads

Download from alldatasheet.com