

# LD-065

## 6.5" Industrial Open Frame LCD Monitor

### Features

- Flexible, low cost and high performance
- For industrial, kiosk, information application
- 6.5" VGA TFT LCD display
- VESA mount

### Specifications

LCD panel	Size	6.5" (4:3)
	Backlight	LED
	Panel type	TN
	Pixel pitch	0.207x0.207 mm
	Active area	132.48x99.36 mm
	Brightness*	800 cd/m2 *
	Contrast	600 : 1
	Viewing angle	160 / 140 degree
	Resolution	640 x 480
	Display color	262K/16.2M (6/8 bit)
	Response time	Tr/Tf=25 mS
	Video	Hor. frequency
Ver. frequency		60/70 Hz
Pixel rate		40 MHz

\* Different brightness is per customer's request

Signal input	15 pin D-sub connector for VGA	
OSD adjustment	Power, Enter, Left, Right, Auto	
Power	DC connector	2.5mm diameter
	DC input	12 Vdc / 0.5A
	Consumption	6W
	Management	VESA DPMS
Mounting	75x75mm VESA mount	
Dimension	162 (W) x 128 (H) x 34 (D) mm	
Net weight		
Package	Packing	
	20' container	
	40' container	
Temperature	Operation**	-30 ~ 80 degree C
	Storage	-30 ~ 80 degree C

\*\* Temperature of LCD surface

\*\* Different temperature range is on demand.


### Ordering information

LD-065-XYZ	X: Panel selection	Y: Input selection	Z: Touch selection
0:	Standard, chosen	0: Standard, VGA/DVI	0: Standard, none
A:	Specified LCD	V: VGA only	G: Glass
B:	Specified LCD	H: VGA/DVI/HDMI	R: Resistive
...etc.	Specified LCD	P: DVI/HDMI/DP	C: Surface capacitive
		S: VGA/DVI/S-video	P: Projective capacitive
			I: IR
			S: SAW

### Optional accessories

- \* Power adapter 100 ~ 240 Vac adapter with 12Vdc / 3A o/p
- \* Power cord 1.8M power cord, US / EU
- \* Signal cable 1.8M VGA cable, 1.8M DVI cable

### Product drawing (referenced only, to be renewed)

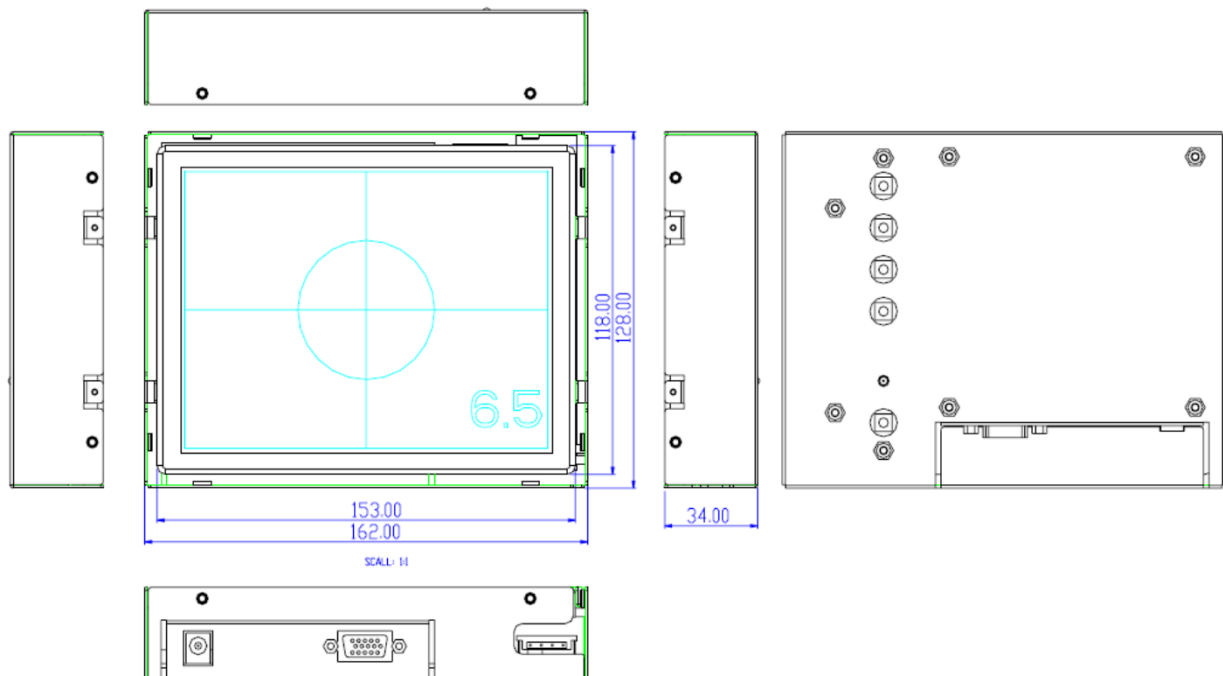

\* All specification and photos are subject to change without notice.