



Micro Commercial Components
21201 Itasca Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

Features

- High Power Surface Mount Package
- Super-Fast Recovery Time
- Low Forward Voltage Drop
- Integral Heat Sink/Locking Tabs
- Compatible with Automatic Insertion Equipment

Maximum Ratings

- Operating Temperature: -55°C to +150°C
- Storage Temperature: -55°C to +150°C
- Maximum Thermal Resistance; 30°C/W Junction To Tab
- Maximum Thermal Resistance; 10°C/W Junction To Bottom

MCC Catalog Number	Device Marking	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
UPR05	M/2UA	50 V	35V	50V
UPR10	M/2UB	100V	70V	100V
UPR15	M/2UC	150V	105V	150V
UPR20	M/2UD	200V	140V	200V

Remark: M= Date Code

Electrical Characteristics @ 25°C Unless Otherwise Specified



Average Forward Current	$I_{F(AV)}$	2.5A	$T_J = 75^\circ\text{C}$
Peak Forward Surge Current	I_{FSM}	25A	8.3ms, half sine
Maximum Instantaneous Forward Voltage	V_F	.975V	$I_{FM} = 2.0A$; $T_J = 25^\circ\text{C}^*$
Maximum DC Reverse Current At Rated DC Blocking Voltage	I_R	2.0 μA 50 μA	$T_J = 25^\circ\text{C}$ $T_J = 125^\circ\text{C}$
Maximum Reverse Recovery Time	T_{rr}	25 ns	$I_F=0.5A$, $I_R=6.0A$, $I_{rr}=0.25A$

*Pulse test: Pulse width 200 μsec , Duty cycle 2%

UPR05 THRU UPR20

2.5 Amp Super Fast Recovery Silicon Rectifier 50 to 200 Volts


DO-216AA (POWERMITE™)

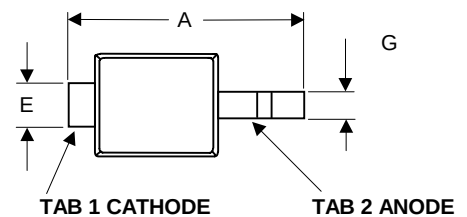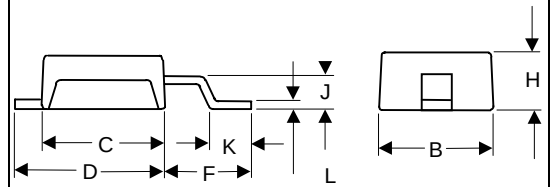

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.143	.153	3.63	3.89	
B	.070	.080	1.78	2.03	
C	.070	.080	1.78	2.03	
D	.087	.097	2.21	2.46	
E	.029	.039	0.74	0.99	
F	.051	.061	1.30	1.55	
G	----	.026	----	0.66	
H	.035	.045	0.89	1.14	
J	.021	.031	0.53	0.79	
K	----	.025	----	0.64	
L	----	.006	----	0.15	


NOTE: POWERMITE™ package is patental by microsemi corp.

Figure 1
Typical Forward Characteristics

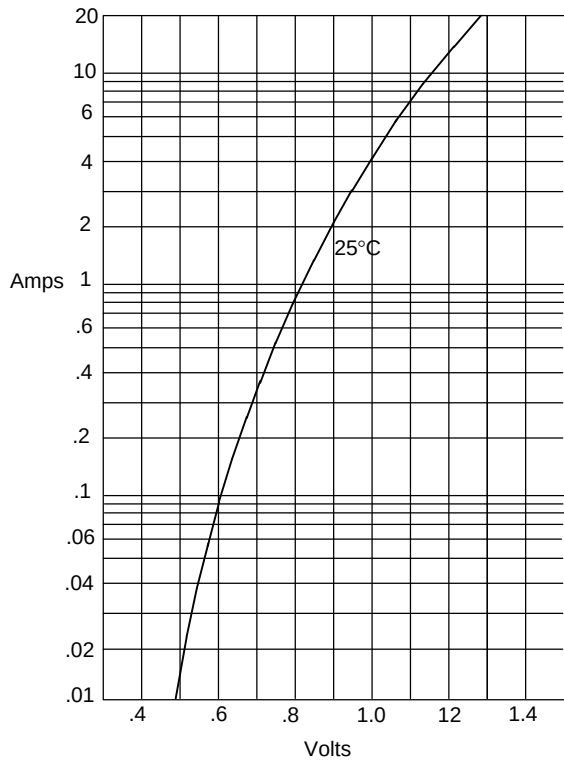


Instantaneous Forward Current - Amperes *versus*
Instantaneous Forward Voltage - Volts

Figure 2
Forward Derating Curve

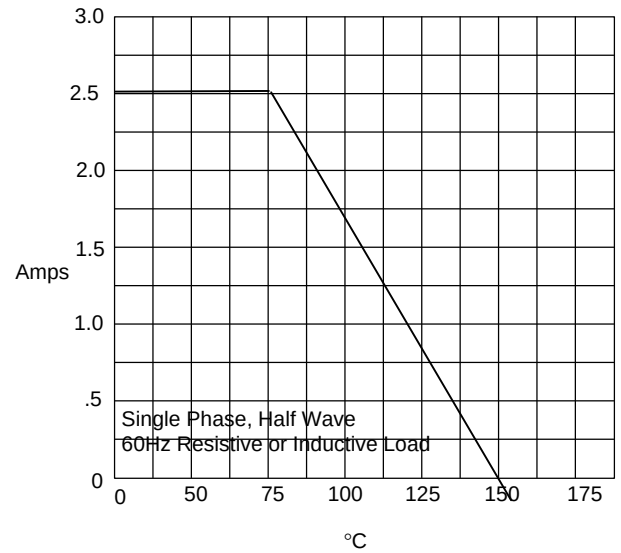

Average Forward Rectified Current - Amperes *versus*
Ambient Temperature - °C

Figure 3
Maximum Non-Repetitive Forward Surge Current

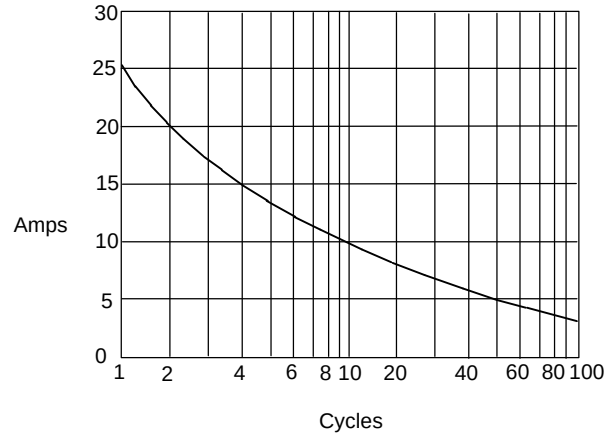

Peak Forward Surge Current - Amperes *versus*
Number Of Cycles At 60Hz - Cycles