DDTA (R1 = R2 SERIES) KA


PNP PRE-BIASED SMALL SIGNAL SURFACE MOUNT TRANSISTOR

Features

- Epitaxial Planar Die Construction
- Complementary NPN Types Available (DDTC)
- Built-In Biasing Resistors, R1 = R2
- **Lead Free/RoHS Compliant (Note 2)**
- **"Green" Device, Note 3 and 4**


Mechanical Data

- Case: SC-59
- Case Material: Molded Plastic, "Green" Molding Compound, Note 4. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020C
- Terminals: Solderable per MIL-STD-202, Method 208
- Lead Free Plating (Matte Tin Finish annealed over Copper leadframe).
- Terminal Connections: See Diagram
- Marking Information: See Table Below & Page 4
- Ordering Information: See Page 4
- Weight: 0.008 grams (approximate)

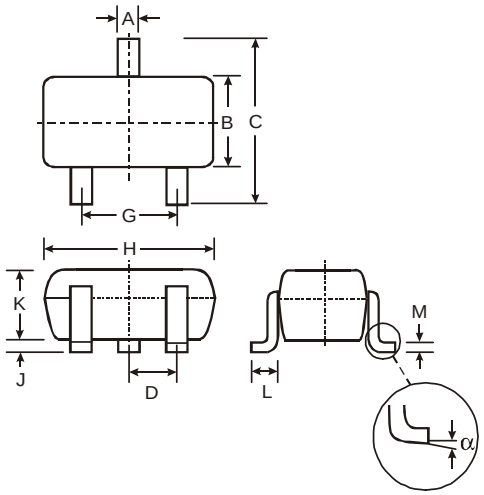


SC-59		
Dim	**Min**	**Max**
A	0.35	0.50
B	1.50	1.70
C	2.70	3.00
D	0.95	
G	1.90	
H	2.90	3.10
J	0.013	0.10
K	1.00	1.30
L	0.35	0.55
M	0.10	0.20
α	0°	8°
All Dimensions in mm		

P/N	R1, R2 (NOM)	Type Code
DDTA123EKA	2.2KΩ	P04
DDTA143EKA	4.7KΩ	P08
DDTA114EKA	10KΩ	P13
DDTA124EKA	22KΩ	P17
DDTA144EKA	47KΩ	P20
DDTA115EKA	100KΩ	P24



Schematic and Pin Configuration



Equivalent Inverter Circuit

Maximum Ratings @T_A = 25°C unless otherwise specified

Characteristic		Symbol	Value	Unit
Supply Voltage, (3) to (2)		V_{CC}	-50	V
Input Voltage, (1) to (2)	DDTA123EKA	V_{IN}	+10 to –12	V
	DDTA143EKA		+10 to –30	
	DDTA114EKA		+10 to –40	
	DDTA124EKA		+10 to –40	
	DDTA144EKA		+10 to –40	
	DDTA115EKA		+10 to -40	
Output Current	DDTA123EKA	I_O	-100	mA
	DDTA143EKA		-100	
	DDTA114EKA		-50	
	DDTA124EKA		-30	
	DDTA144EKA		-100	
	DDTA115EKA		-20	
Output Current	All	I_C (Max)	-100	mA
Power Dissipation		P_d	200	mW
Thermal Resistance, Junction to Ambient Air (Note 1)		$R_{\theta JA}$	625	°C/W
Operating and Storage Temperature Range		T_j, T_{STG}	-55 to +150	°C

Notes:
1. Mounted on FR4 PC Board with recommended pad layout at http://www.diodes.com/datasheets/ap02001.pdf.
2. No purposefully added lead.
3. Diodes Inc.'s "Green" policy can be found on our website at http://www.diodes.com/products/lead_free/index.php.
4. Product manufactured with Date Code 0627 (week 27, 2006) and newer are built with Green Molding Compound. Product manufactured prior to Date Code 0627 are built with Non-Green Molding Compound and may contain Halogens or Sb2O3 Fire Retardants.

© Diodes Incorporated

Electrical Characteristics @T_A = 25°C unless otherwise specified

Characteristic		Symbol	Min	Typ	Max	Unit	Test Condition
Input Voltage		$V_{I(off)}$	-0.5	-1.1	—	V	V_{CC} = -5V, I_O = -100μA
		$V_{I(on)}$	—	-1.9	-3		V_O = -0.3V, I_O = -20mA, DDTA123EKA V_O = -0.3V, I_O = -20mA, DDTA143EKA V_O = -0.3V, I_O = -10mA, DDTA114EKA V_O = -0.3V, I_O = -5mA, DDTA124EKA V_O = -0.3V, I_O = -2mA, DDTA144EKA V_O = -0.3V, I_O = -1mA, DDTA115EKA
Output Voltage		$V_{O(on)}$	—	-0.1	-0.3	V	I_O/I_I = -10mA/-0.5mA, DDTA123EKA I_O/I_I = -10mA/-0.5mA, DDTA143EKA I_O/I_I = -10mA/-0.5mA, DDTA114EKA I_O/I_I = -10mA/-0.5mA, DDTA124EKA I_O/I_I = -10mA/-0.5mA, DDTA144EKA I_O/I_I = -5mA/-0.25mA, DDTA115EKA
Input Current	DDTA123EKA DDTA143EKA DDTA114EKA DDTA124EKA DDTA144EKA DDTA115EKA	I_I	—	—	-3.8 -1.8 -0.88 -0.36 -0.18 -0.15	mA	V_I = -5V
Output Current		$I_{O(off)}$	—	—	-0.5	μA	V_{CC} = -50V, V_I = 0V
DC Current Gain	DDTA123EKA DDTA143EKA DDTA114EKA DDTA124EKA DDTA144EKA DDTA115EKA	G_I	20 20 30 56 68 82	—	—	—	V_O = -5V, I_O = -20mA V_O = -5V, I_O = -10mA V_O = -5V, I_O = -5mA V_O = -5V, I_O = -5mA V_O = -5V, I_O = -5mA V_O = -5V, I_O = -5mA
Input Resistor (R_1) Tolerance		ΔR_1	-30	—	+30	%	—
Resistance Ratio		R_2/R_1	0.8	1	1.2	—	—
Gain-Bandwidth Product*		f_T	—	250	—	MHz	V_{CE} = -10V, I_E = 5mA, f = 100MHz

* Transistor - For Reference Only

© Diodes Incorporated

Typical Curves – DDTA143EKA

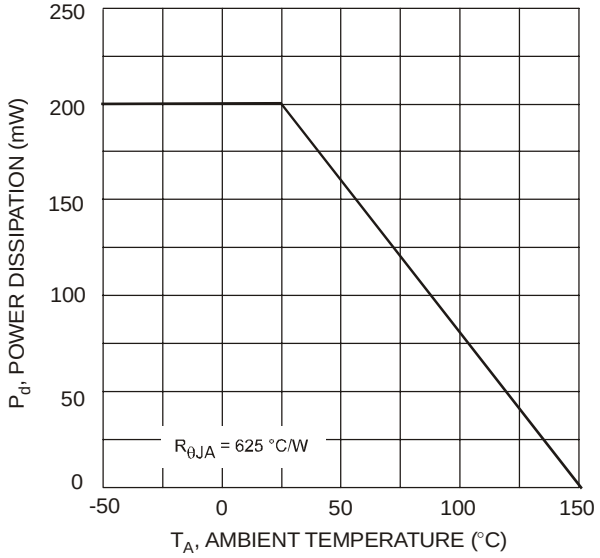


Fig. 1 Derating Curve

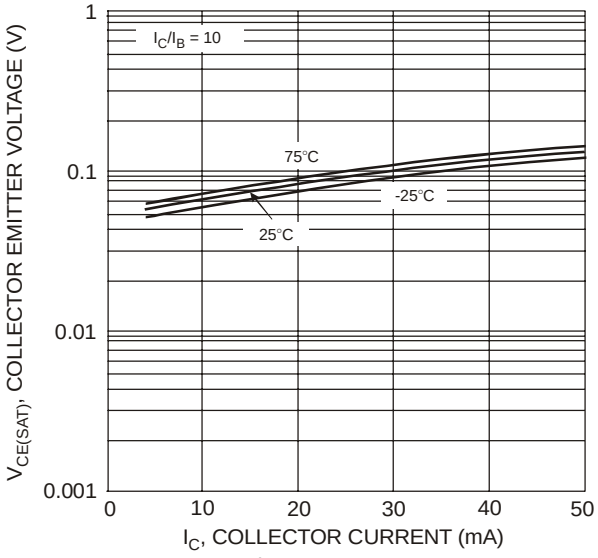


Fig. 2 $V_{CE(SAT)}$ vs. I_C

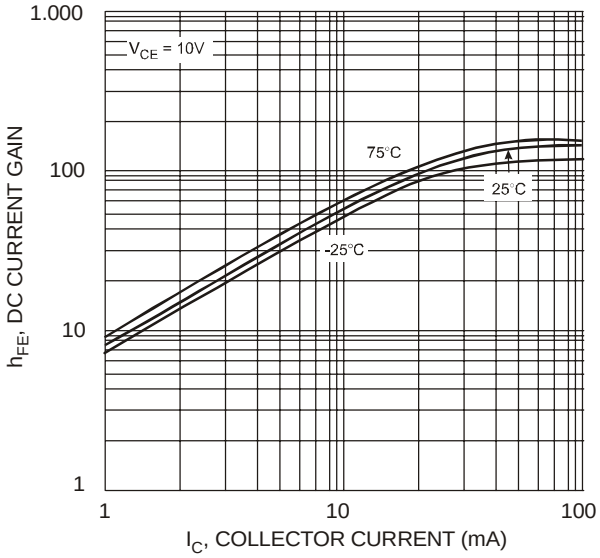


Fig. 3 DC Current Gain

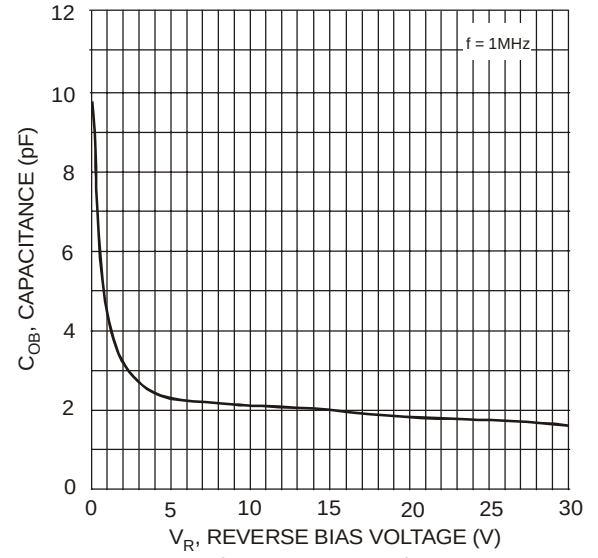


Fig. 4 Output Capacitance

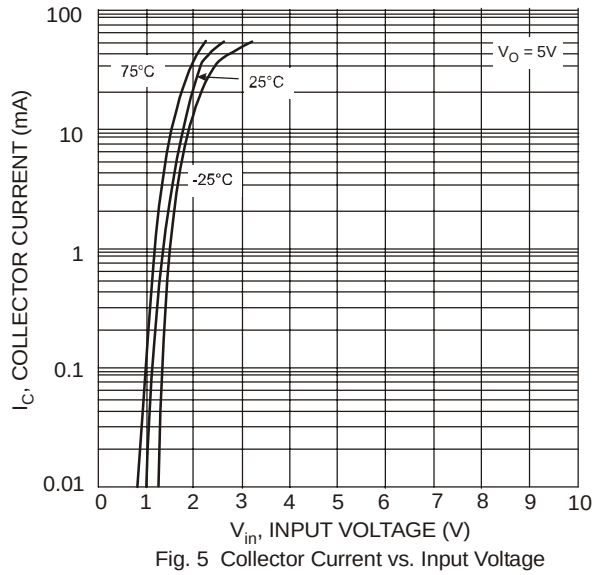


Fig. 5 Collector Current vs. Input Voltage

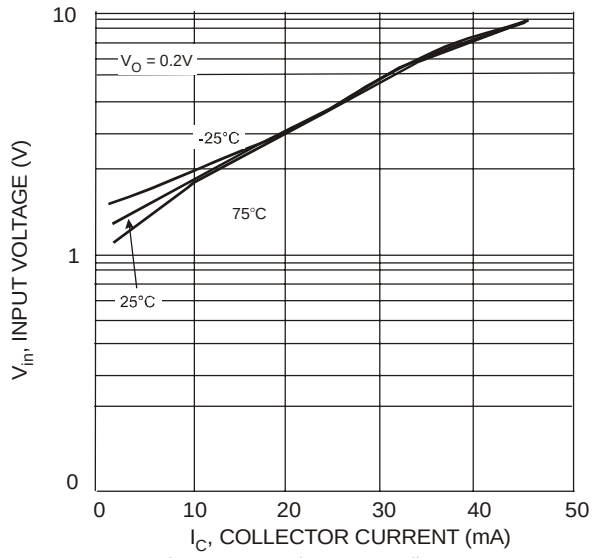


Fig. 6 Input Voltage vs. Collector Current


© Diodes Incorporated

Ordering Information (Note 4 & 5)

Device	Packaging	Shipping
DDTA123EKA-7-F	SC-59	3000/Tape & Reel
DDTA143EKA-7-F	SC-59	3000/Tape & Reel
DDTA114EKA-7-F	SC-59	3000/Tape & Reel
DDTA124EKA-7-F	SC-59	3000/Tape & Reel
DDTA144EKA-7-F	SC-59	3000/Tape & Reel
DDTA115EKA-7-F	SC-59	3000/Tape & Reel

Notes: 5. For packaging details, go to our website at http://www.diodes.com/datasheets/ap02007.pdf.

Marking Information



PXX = Product Type Marking Code, See Table on Page 1
YM = Date Code Marking
Y = Year ex: T = 2006
M = Month ex: 9 = September

Date Code Key

Year	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012
Code	N	P	R	S	T	U	V	W	X	Y	Z

Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	O	N	D

IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.

© Diodes Incorporated