


Slide —



Features/Benefits

- **Ultraminiature surface mount**
- **Low profile**
- **SPDT & SP3T models**
- **RoHS compliant**

Typical Applications

- **Computer peripherals & network products**
- **Telecommunication products**
- **Test & measurement equipment**

Specifications

CONTACT RATING: 0.3A @ 6 VDC.
MECHANICAL LIFE: 10,000 cycles.
CONTACT RESISTANCE: 70 m Ω max.
INSULATION RESISTANCE: 100 M Ω min. @ 500V.
DIELECTRIC STRENGTH: 500 VAC min.
OPERATING TEMPERATURE: -10°C to +85°C.
SOLDERABILITY: 255C max. solder temperature.
PACKAGING: Tape & reel.

Materials

CASE: PPA
COVER: Stainless steel.
SLIDER: Nylon 4/6
BRUSH: Copper alloy silver clad.
TERMINALS: Copper alloy, silver plated.


NOTE: All models RoHS compliant and compatible with all options.

NOTE: Specifications and materials listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.


How To Order

Complete part numbers for PCM Series Ultraminiature Surface Mount Slide Switches are shown below and on page I-45.

PC MOUNTING

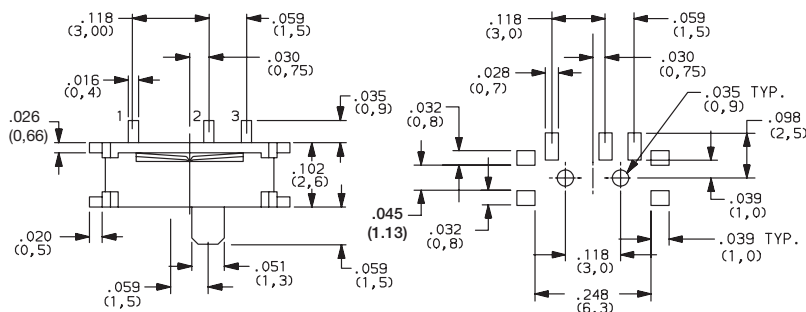

PCM12SMTR
SPDT

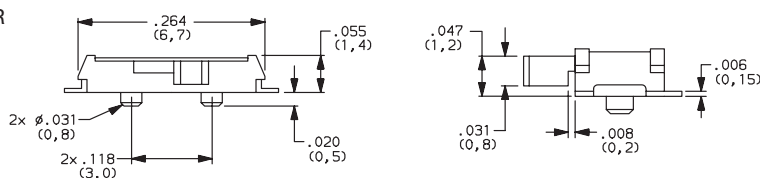

Actuator shown in pos. 2

PART NUMBER	SWITCH FUNCTION	
	POS. 1	POS. 2
		
PCM12SMTR	ON	ON
CONN. TERMINALS	1-2	2-3

SCHEMATIC




SPDT

TAPE & REEL

For part number PCM12SMTR

Quantity per reel 3500

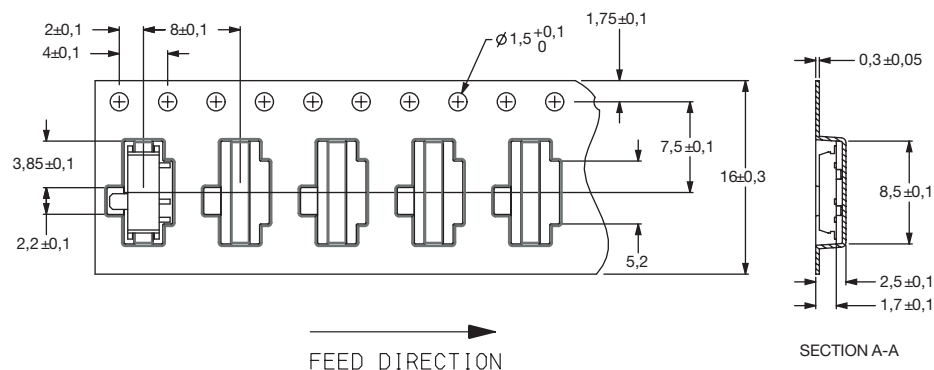


PCM Series

Ultraminiature Surface Mount Slide Switches


PART NUMBER	SWITCH FUNCTION		
	POS. 1	POS. 2	POS. 3
PCM13SMTR	ON	ON	ON
CONN. TERMINALS	1-3	2-3	3-4

SCHEMATIC

SP3T

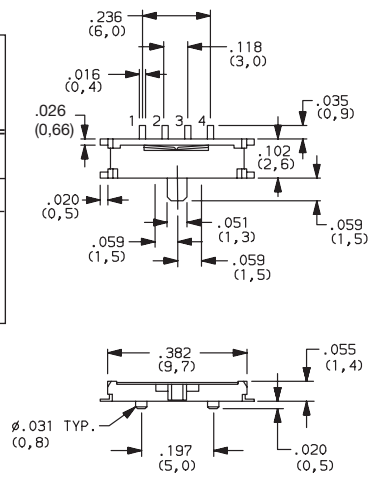

Actuator shown in pos. 2

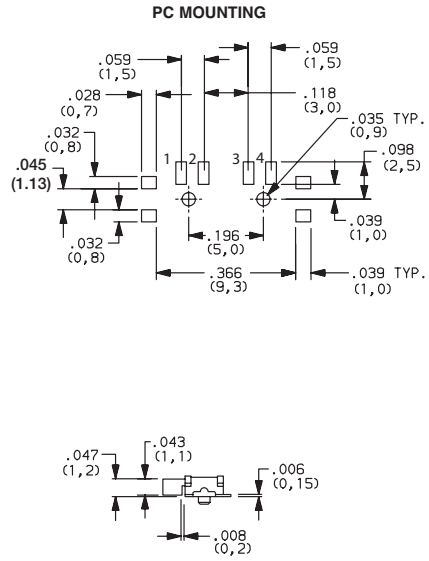

PCM13SMTR
SP3T





Slide

TAPE & REEL

For part number PCM13SMTR

Quantity per reel 3500

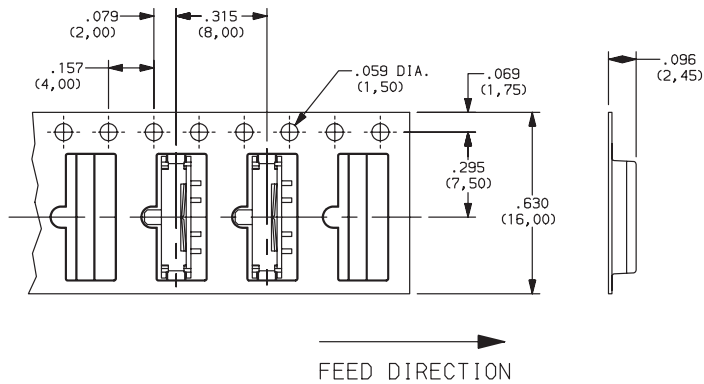

Third Angle Projection

Dimensions are shown: Inches (mm)
Specifications and dimensions subject to change