DATA DISPLAY GROUP

Datasheet

LG Display

LP156WF4-SLB5

HD-10-094

The information contained in this document has been carefully researched and is, to the best of our knowledge, accurate. However, we assume no liability for any product failures or damages, immediate or consequential, resulting from the use of the information provided herein. Our products are not intended for use in systems in which failures of product could result in personal injury. All trademarks mentioned herein are property of their respective owners. All specifications are subject to change without notice.

SPECIFICATION
FOR
APPROVAL

( ) **Preliminary Specification**
(◆) **Final Specification**

Title	15.6” Full HD TFT LCD

Customer	
MODEL	

SUPPLIER	LG Display Co., Ltd.
*MODEL	LP156WF4
Suffix	SLB5

*When you obtain standard approval,
please use the above model name without suffix

APPROVED BY	SIGNATURE
/	
/	
/	

Please return 1 copy for your confirmation with your signature and comments.

APPROVED BY	SIGNATURE
S.R.Kim / S.Manager	
REVIEWED BY	
M.J.Lee / Manager	
PREPARED BY	
S. B. Park / Engineer S. I. Joo / Engineer	

Products Engineering Dept.
LG Display Co., Ltd

Contents


No	ITEM	Page
	COVER	1
	CONTENTS	2
	RECORD OF REVISIONS	3
1	GENERAL DESCRIPTION	4
2	ABSOLUTE MAXIMUM RATINGS	5
3	ELECTRICAL SPECIFICATIONS	
3-1	ELECTRICAL CHARACTREISTICS	6-7
3-2	INTERFACE CONNECTIONS	8
3-3	LVDS SIGNAL TIMING SPECIFICATION	9-10
3-4	SIGNAL TIMING SPECIFICATIONS	11
3-5	SIGNAL TIMING WAVEFORMS	11
3-6	COLOR INPUT DATA REFERNECE	12
3-7	POWER SEQUENCE	13
4	OPTICAL SFECIFICATIONS	14-16
5	MECHANICAL CHARACTERISTICS	17-19
6	RELIABLITY	20
7	INTERNATIONAL STANDARDS	
7-1	SAFETY	21
7-2	EMC	21
7-3	Environment	21
8	PACKING	
8-1	DESIGNATION OF LOT MARK	22
8-2	PACKING FORM	22
8-3	Label Description	23
9	PRECAUTIONS	24-25
A	APPENDIX. Enhanced Extended Display Identification Data	26-28

RECORD OF REVISIONS

Revision No	Revision Date	Page	Description	EDID ver
0.0	Dec. 21. 2011	-	First Draft (Preliminary Specification)	-
0.1	Feb. 22. 2012	11	Update the Timing Spec. (Add appendix about low refresh rate)	0.1
		14	Change the Optical Spec. (R, G, B Color Coordinates)	
		26~28	Update the EDID data	
1.0	Apr. 19. 2012	18-19	Update Mechanic Drawing	1.0
		23	Update Label description	

1. General Description

The LP156WF4 is a Color Active Matrix Liquid Crystal Display with an integral LED backlight system. The matrix employs a-Si Thin Film Transistor as the active element. It is a transmissive type display operating in the normally black mode. This TFT-LCD has 15.6 inches diagonally measured active display area with FHD resolution (1920 horizontal by 1080 vertical pixel array). Each pixel is divided into Red, Green and Blue sub-pixels or dots which are arranged in vertical stripes. Gray scale or the brightness of the sub-pixel color is determined with a 6-bit gray scale signal for each dot, thus, presenting a palette of more than 262,144 colors. The LP156WF4 has been designed to apply the interface method that enables low power, high speed, low EMI. The LP156WF4 is intended to support applications where thin thickness, low power are critical factors and graphic displays are important. In combination with the vertical arrangement of the sub-pixels, the LP156WF4 characteristics provide an excellent flat display for office automation products such as Notebook PC.

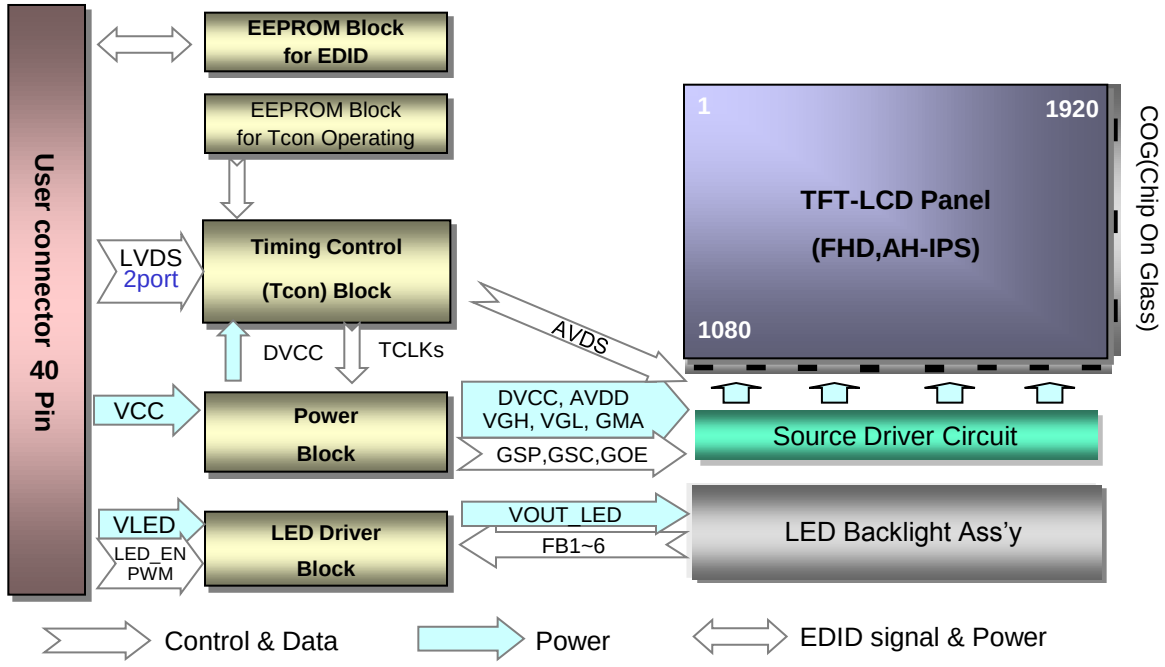

General Features

Active Screen Size	15.6 inches diagonal
Outline Dimension	359.5(H, typ.) × 224.1(V, typ.) × 3.4(D,max) [mm] (with Bracket & PCB Board)
Pixel Pitch	0.17925 mm x 0.17925 mm
Pixel Format	1920 horiz. By 1080 vert. Pixels RGB strip arrangement
Color Depth	6-bit, 262,144 colors
Luminance, White	300 cd/m^2 (Typ.5 point)
Power Consumption	Total 7.0 W(Typ.) Logic : 1.4W (Typ.@ Mosaic), B/L : 5.6W (Typ.@VLED12V)
Weight	330g (Max.) / 320g (Typ.)
Display Operating Mode	Normally Black
Surface Treatment	Anti glare treatment (3H) of the front Polarizer
RoHS Compliance	Yes
BFR / PVC / As Free	Yes for all


2. Absolute Maximum Ratings

The following are maximum values which, if exceeded, may cause faulty operation or damage to the unit.

Table 1. ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Values		Units	Notes
		Min	Max		
Power Input Voltage	VCC	-0.3	4.0	Vdc	at 25 ± 5°C
Operating Temperature	TOP	0	50	°C	1
Storage Temperature	HST	-20	60	°C	1
Operating Ambient Humidity	HOP	10	90	%RH	1
Storage Humidity	HST	10	90	%RH	1

Note : 1. Temperature and relative humidity range are shown in the figure below.
Wet bulb temperature should be 39°C Max, and no condensation of water.
Note : 2. Storage Condition is guaranteed under packing condition.

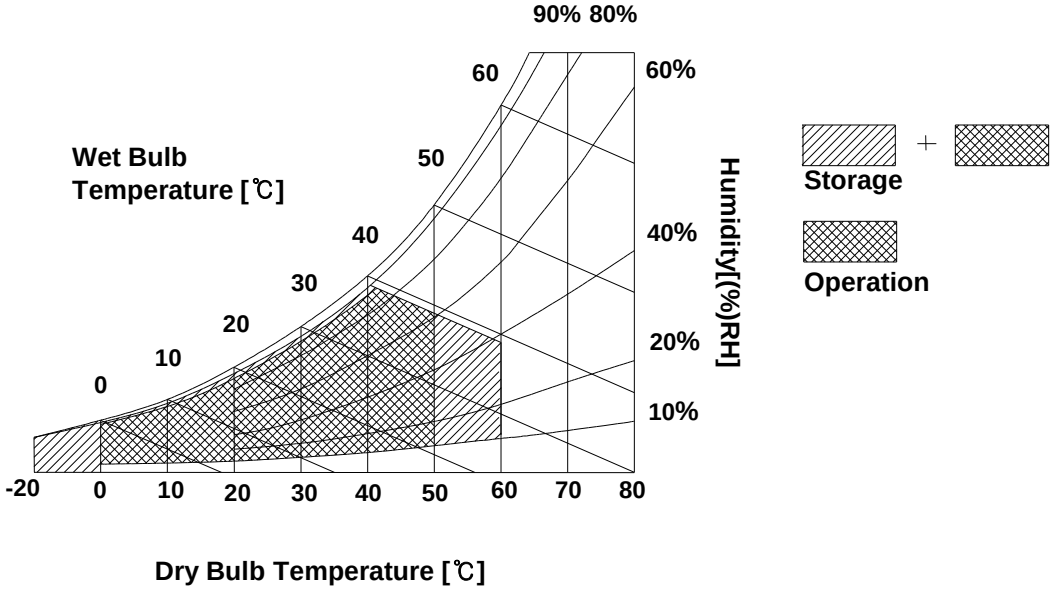

3. Electrical Specifications

3-1. Electrical Characteristics


The LP156WF4 requires two power inputs. The first logic is employed to power the LCD electronics and to drive the TFT array and liquid crystal. The second backlight is the input about LED BL with LED Driver.

Table 2. ELECTRICAL CHARACTERISTICS


Parameter	Symbol	Values			Unit	Notes
		Min	Typ	Max		
LOGIC :						
Power Supply Input Voltage	V_{CC}	3.0	3.3	3.6	V	1
Power Supply Input Current Mosaic	I_{CC}	-	430	495	mA	2
Power Consumption	P_{CC}	-	1.4	1.6	W	2
Power Supply Inrush Current	I_{CC_P}	-	-	1500	mA	3
LVDS Impedance	Z_{LVDS}	90	100	110	Ω	4
BACKLIGHT : (with LED Driver)						
LED Power Input Voltage	V_{LED}	7.0	12.0	21.0	V	5
LED Power Input Current	I_{LED}	-	470	520	mA	6
LED Power Consumption	P_{LED}	-	5.6	6.2	W	6
LED Power Inrush Current	I_{LED_P}	-	-	1500	mA	7
PWM Duty Ratio		5	-	100	%	8
PWM Jitter	-	0	-	0.2	%	9
PWM Impedance	Z_{PWM}	20	40	60	kΩ	
PWM Frequency	F_{PWM}	200	-	1000	Hz	10
PWM High Level Voltage	V_{PWM_H}	3.0	-	5.3	V	
PWM Low Level Voltage	V_{PWM_L}	0	-	0.3	V	
LED_EN Impedance	Z_{PWM}	20	40	60	kΩ	
LED_EN High Voltage	$V_{LED_EN_H}$	3.0	-	5.3	V	
LED_EN Low Voltage	$V_{LED_EN_L}$	0	-	0.3	V	
Life Time		12,000	-	-	Hrs	11


Note)

1. The measuring position is the connector of LCM and the test conditions are under 25℃, fv = 60Hz, Black pattern.
2. The specified Icc current and power consumption are under the Vcc = 3.3V , 25℃, fv = 60Hz condition and Mosaic pattern.

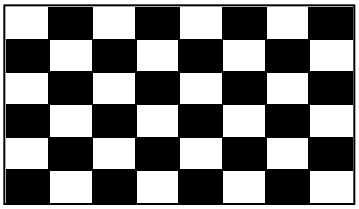


3. This Spec. is the max load condition for the cable impedance designing.
4. The below figures are the measuring Vcc condition and the Vcc control block LGD used. The Vcc condition is same as the minimum of T1 at Power on sequence.

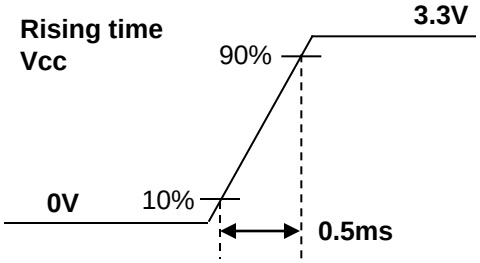

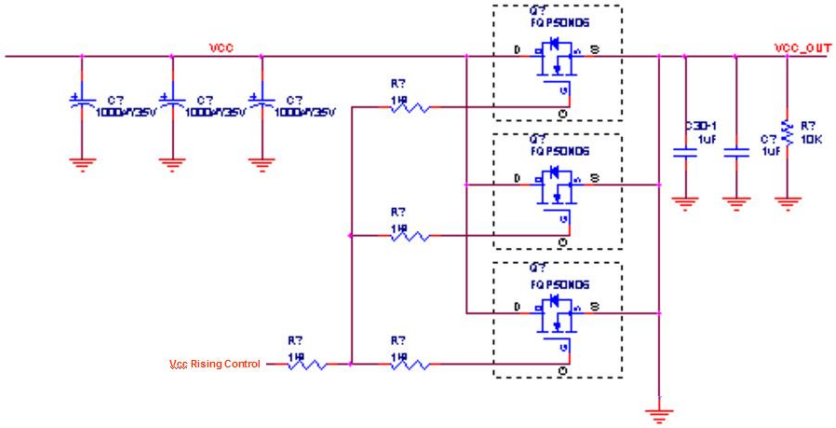

5. This impedance value is needed for proper display and measured form LVDS Tx to the mating connector.
6. The measuring position is the connector of LCM and the test conditions are under 25℃.
7. The current and power consumption with LED Driver are under the Vled = 12.0V , 25℃, Dimming of Max luminance and White pattern with the normal frame frequency operated(60Hz).
8. The below figures are the measuring Vled condition and the Vled control block LGD used. VLED control block is same with Vcc control block.

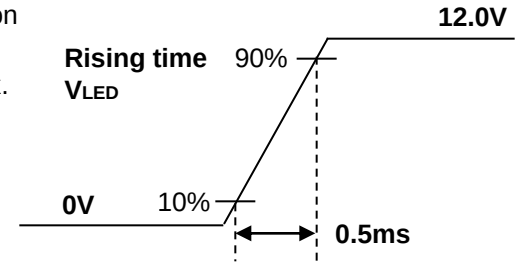


9. The operation of LED Driver below minimum dimming ratio may cause flickering or reliability issue.
10. If Jitter of PWM is bigger than maximum, it may induce flickering.
11. This Spec. is not effective at 100% dimming ratio as an exception because it has DC level equivalent to 0Hz. In spite of acceptable range as defined, the PWM Frequency should be fixed and stable for more consistent brightness control at any specific level desired.
12. The life time is determined as the time at which brightness of LCD is 50% compare to that of minimum value specified in table 7. under general user condition.

3-2. Interface Connections


This LCD employs two interface connections, a 40 pin connector used for the module electronics interface and the other connector used for the integral backlight system.

Table 3. MODULE CONNECTOR PIN CONFIGURATION (CN1)

Pin	Symbol	Description	Notes
1	NC	No Connection	**[Interface Chip]** 1. LCD : SiW, SW0636A (LCD Controller) Including LVDS Receiver. 2. System : SiW LVDSRx or equivalent * Pin to Pin compatible with LVDS **[Connector]** UJU IS050-L40B-C10 LSMtron GT05Q-40S-H10 or equivalent **[Mating Connector]** 20453-040T-## series or equivalent **[Connector pin arrangement]**  [LCD Module Rear View]
2	VCC	LCD Logic and driver power (3.3V Typ.)	
3	VCC	LCD Logic and driver power (3.3V Typ.)	
4	V EEDID	DDC Power (3.3V)	
5	NC	No Connection	
6	Clk EEDID	DDC Clock	
7	DATA EEDID	DDC Data	
8	ORX0-	Negative LVDS differential data input	
9	ORX0+	Positive LVDS differential data input	
10	GND	High Speed Ground	
11	ORX1-	Negative LVDS differential data input	
12	ORX1+	Positive LVDS differential data input	
13	GND	High Speed Ground	
14	ORX2-	Negative LVDS differential data input	
15	ORX2+	Positive LVDS differential data input	
16	GND	High Speed Ground	
17	ORXC-	Negative LVDS differential clock input	
18	ORXC+	Positive LVDS differential clock input	
19	GND	High Speed Ground	
20	ERX0-	Negative LVDS differential data input	
21	ERX0+	Positive LVDS differential data input	
19	GND	High Speed Ground	
23	ERX1-	Negative LVDS differential data input	
24	ERX1+	Positive LVDS differential data input	
19	GND	High Speed Ground	
26	ERX2-	Negative LVDS differential data input	
27	ERX2+	Positive LVDS differential data input	
19	GND	High Speed Ground	
29	ERXC-	Negative LVDS differential clock input	
30	ERXC+	Positive LVDS differential clock input	
31	GND	LED Backlight Ground	
32	GND	LED Backlight Ground	
33	GND	LED Backlight Ground	
34	NC	No Connection	
35	PWM	System PWM Signal input for dimming	
36	LED_EN	LED Backlight On/Off	
37	NC	No Connection	
38	VLED	LED Backlight Power (7V-21V)	
39	VLED	LED Backlight Power (7V-21V)	
40	VLED	LED Backlight Power (7V-21V)	


3-3. LVDS Signal Timing Specifications

3-3-1. DC Specification

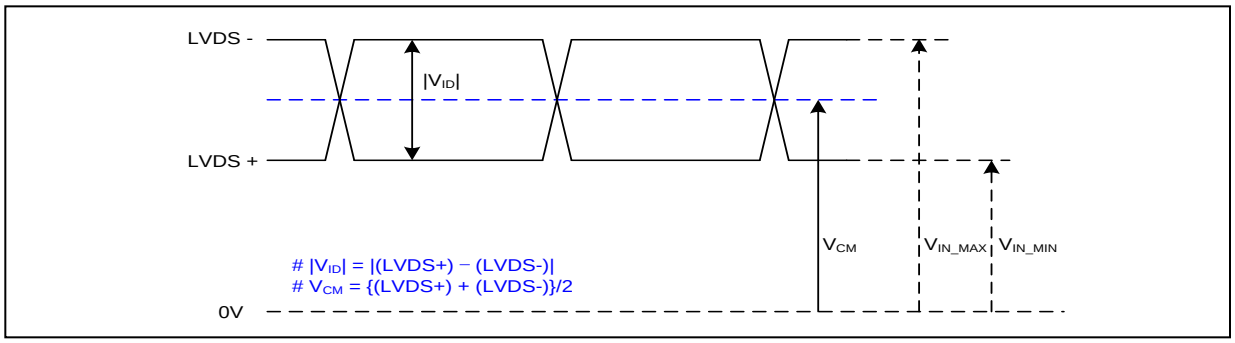


Description	Symbol	Min	Max	Unit	Notes
LVDS Differential Voltage	$\|V_{ID}\|$	100	600	mV	-
LVDS Common mode Voltage	V_{CM}	0.6	1.8	V	-
LVDS Input Voltage Range	V_{IN}	0.3	2.1	V	-


3-3-2. AC Specification

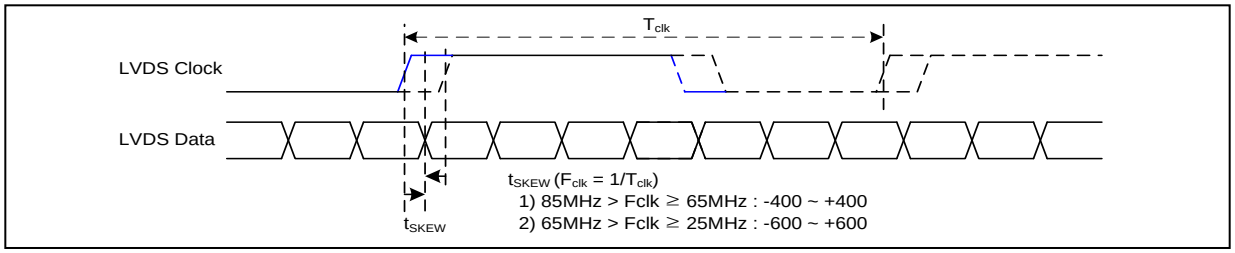

Description	Symbol	Min	Max	Unit	Notes
LVDS Clock to Data Skew Margin	t_{SKEW}	- 400	+ 400	ps	85MHz > Fclk ≥ 65MHz
	t_{SKEW}	- 600	+ 600	ps	65MHz > Fclk ≥ 25MHz
LVDS Clock to Clock Skew Margin (Even to Odd)	t_{SKEW_EO}	- 1/7	+ 1/7	T_{clk}	-
Maximum deviation of input clock frequency during SSC	F_{DEV}	-	± 3	%	-
Maximum modulation frequency of input clock during SSC	F_{MOD}	-	200	KHz	-

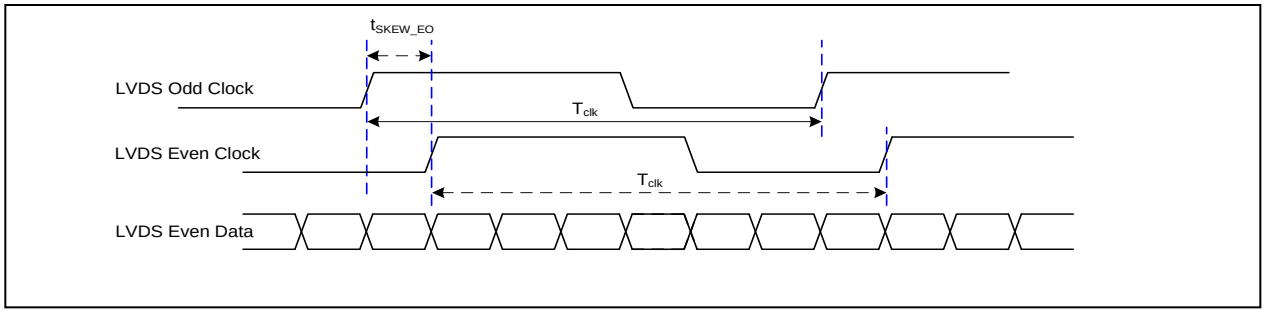


< Clock skew margin between channel >

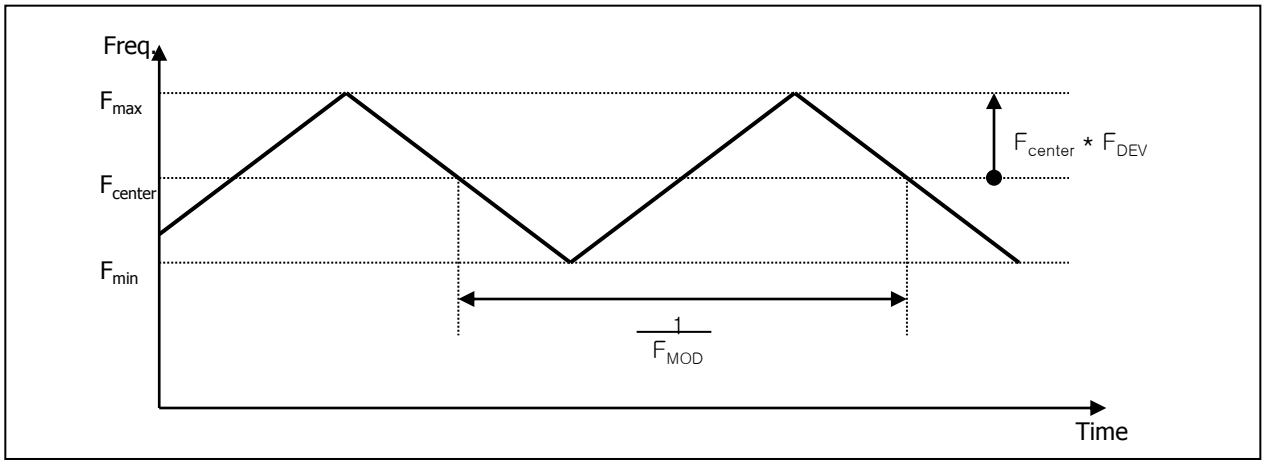

< Spread Spectrum >

3-3-3. Data Format

1) LVDS 2 Port

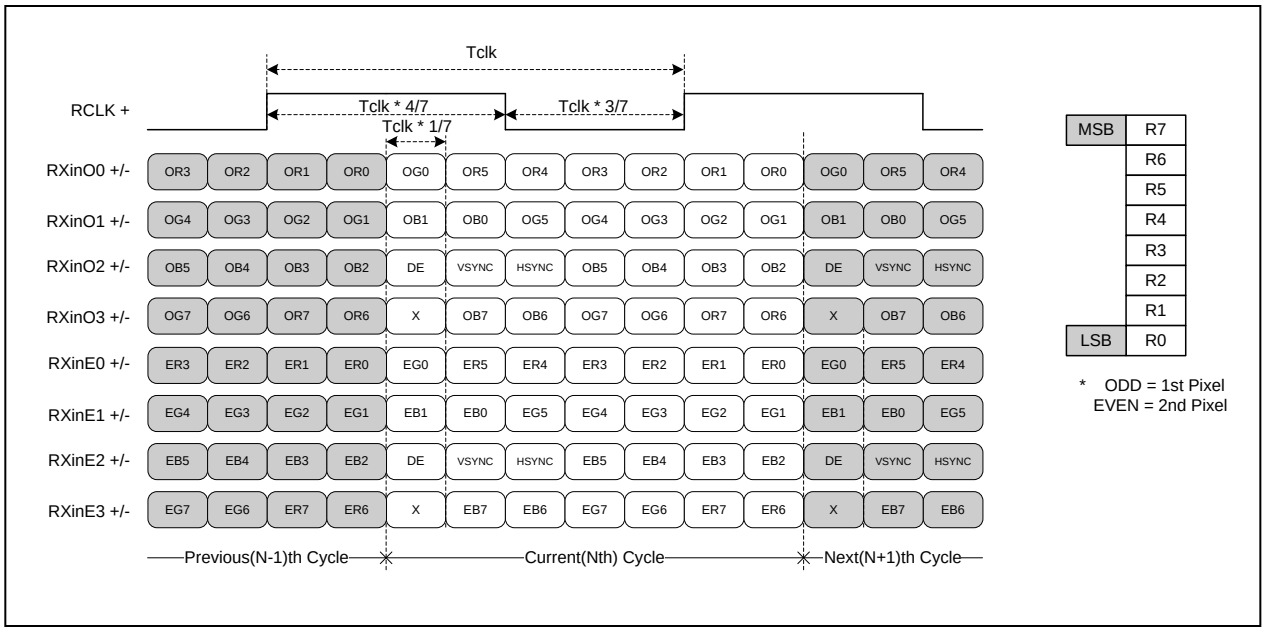

< LVDS Data Format >

3-4. Signal Timing Specifications


This is the signal timing required at the input of the User connector. All of the interface signal timing should be satisfied with the following specifications and specifications of LVDS Tx/Rx for its proper operation.

Table 6. TIMING TABLE

ITEM	Symbol		Min	Typ	Max	Unit	Note
DCLK	Frequency	f_{CLK}	68.6	74.5	77.3	MHz	LVDS 2 port (60Hz)
Hsync	Period	t_{HP}	1032	1104	1138	tCLK	
	Width	t_{WH}	32	36	36		
	Width-Active	t_{WHA}	960	960	960		
Vsync	Period	t_{VP}	1108	1124	1132	tHP	
	Width	t_{WV}	5	5	5		
	Width-Active	t_{WVA}	1080	1080	1080		
Data Enable	Horizontal back porch	t_{HBP}	24	84	90	tCLK	
	Horizontal front porch	t_{HFP}	16	24	52		
	Vertical back porch	t_{VBP}	20	36	38	tHP	
	Vertical front porch	t_{VFP}	3	3	9		

Appendix) all reliabilities are specified for timing specification based on refresh rate of 60Hz. However, LP156WF4 has a good actual performance even at lower refresh rate (e.g. 40Hz or 50Hz) for power saving mode, whereas LP156WF4 is secured only for function under lower refresh rate. 60Hz at Normal mode, 50Hz, 40Hz at Power save mode. Don't care Flicker level (power save mode).

3-5. Signal Timing Waveforms

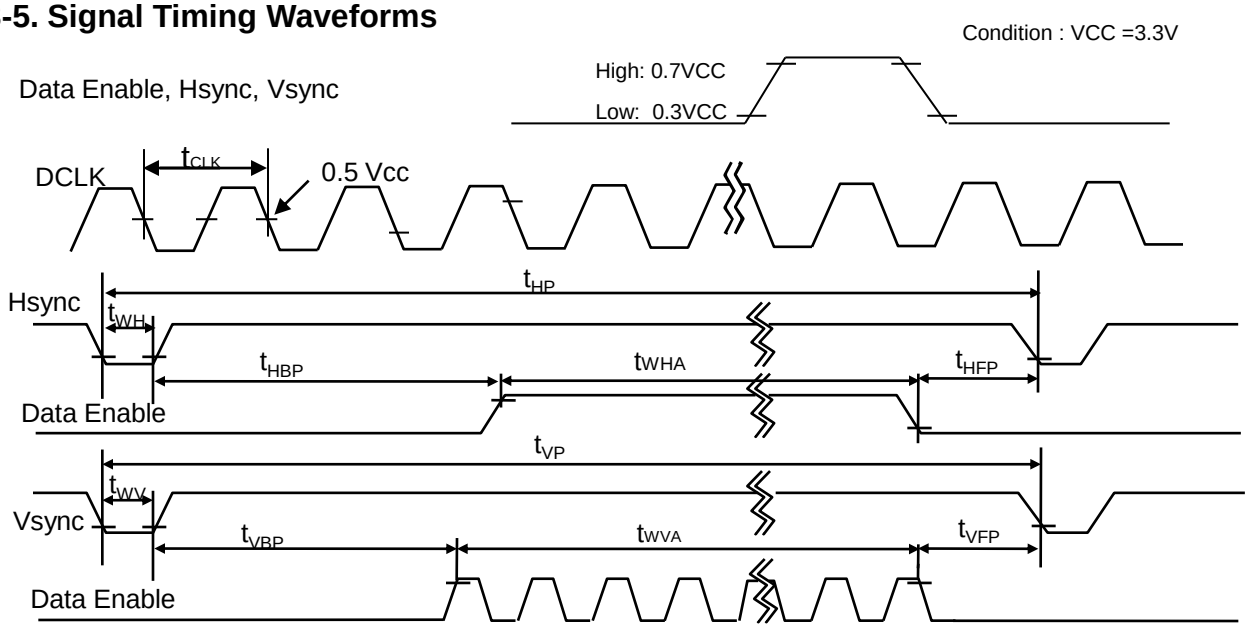

3-6. Color Input Data Reference

The brightness of each primary color (red, green and blue) is based on the 6-bit gray scale data input for the color ; the higher the binary input, the brighter the color. The table below provides a reference for color versus data input.

Table 5. COLOR DATA REFERENCE

Color		Input Color Data																	
		RED						GREEN						BLUE					
		MSB					LSB	MSB					LSB	MSB					LSB
		R 5	R 4	R 3	R 2	R 1	R 0	G 5	G 4	G 3	G 2	G 1	G 0	B 5	B 4	B 3	B 2	B 1	B 0
Basic Color	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
	Cyan	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
RED	RED (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED (01)	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0
	…			…						…						…			
	RED (62)	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED (63)	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
GREEN	GREEN (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	GREEN (01)	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0
	...			...						...						...			
	GREEN (62)	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	0	0
	GREEN (63)	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
BLUE	BLUE (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	BLUE (01)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	…			…						…						…			
	BLUE (62)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	0
	BLUE (63)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1

3-7. Power Sequence

Power Supply Input
VCC

Interface Signal, V_i
LVDS

LED BL
On/Off Control Signal
LED_EN

LED BL
Dimming Control Signal
PWM

LED Driver Input Voltage
VLED

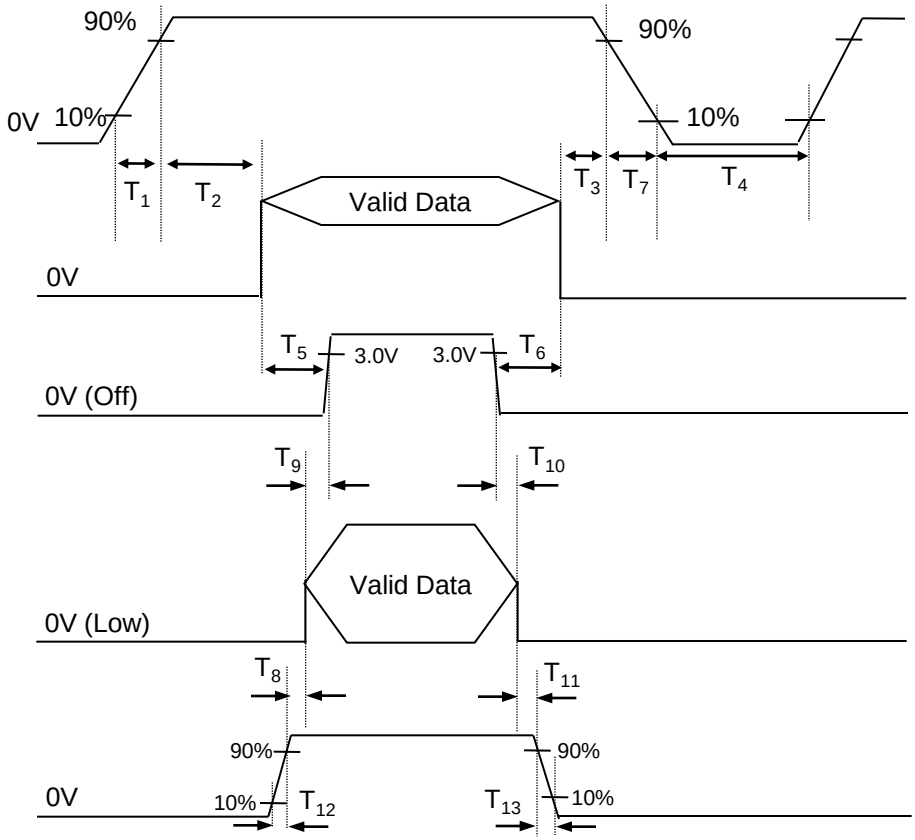


Table 6. POWER SEQUENCE TABLE

Logic Parameter	Value			Units
	Min.	Typ.	Max.	
T_1	0.5	-	10	ms
T_2	0	-	50	ms
T_3	0	-	50	ms
T_4	400	-	-	ms
T_5	200	-	-	ms
T_6	200	-	-	ms
T_7	3	-	10	ms

LED Parameter	Value			Units
	Min.	Typ.	Max.	
T_8	10	-	-	ms
T_9	0	-	-	ms
T_{10}	0	-	-	ms
T_{11}	10	-	-	ms
T_{12}	0.5	-	-	ms
T_{13}	0	-	5000	ms

Note)
1. Do not insert the mating cable when system turn on.
2. Valid Data have to meet "3-3. LVDS Signal Timing Specifications"
3. LVDS, LED_EN and PWM need to be on pull-down condition on invalid status.
4. LGD recommend the rising sequence of VLED after the Vcc and valid status of LVDS turn on.

4. Optical Specification

Optical characteristics are determined after the unit has been 'ON' and stable for approximately 30 minutes in a dark environment at 25°C. The values specified are at an approximate distance 50cm from the LCD surface at a viewing angle of Φ and Θ equal to 0°.
FIG. 1 presents additional information concerning the measurement equipment and method.

FIG. 1 Optical Characteristic Measurement Equipment and Method

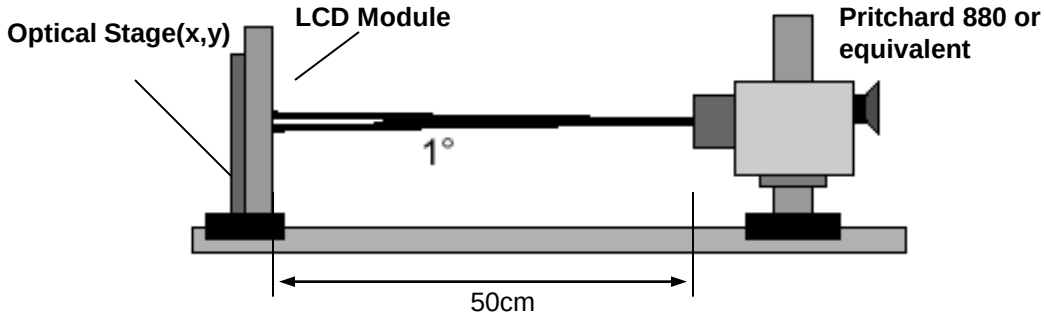


Table 9. OPTICAL CHARACTERISTICS

Ta=25°C, VCC=3.3V, fv=60Hz, f_{CLK}= 74.5MHz

Parameter	Symbol	Values			Units	Notes
		Min	Typ	Max		
Contrast Ratio	CR	400	-	-		1
Surface Luminance, white	L_{WH}	255	300	-	cd/m^2	2
Luminance Variation	δ_{WHITE}	-	1.4	1.6		3
Response Time	$Tr_R + Tr_D$	-	35	50	ms	4
Color Coordinates						
RED	RX	0.599	0.629	0.659		
	RY	0.320	0.350	0.380		
GREEN	GX	0.319	0.349	0.379		
	GY	0.584	0.614	0.644		
BLUE	BX	0.124	0.154	0.184		
	BY	0.082	0.112	0.142		
WHITE	WX	0.283	0.313	0.343		
	WY	0.299	0.329	0.359		
Viewing Angle						5
x axis, right(Φ=0°)	Θr	80	-	-	degree	
x axis, left (Φ=180°)	Θl	80	-	-	degree	
y axis, up (Φ=90°)	Θu	80	-	-	degree	
y axis, down (Φ=270°)	Θd	80	-	-	degree	
Gray Scale						6

Note)

1. Contrast Ratio(CR) is defined mathematically as

$$\text{Contrast Ratio} = \frac{\text{Surface Luminance with all white pixels}}{\text{Surface Luminance with all black pixels}}$$

2. Surface luminance is the average of 5 point across the LCD surface 50cm from the surface with all pixels displaying white. For more information see FIG 1.

LWH = Average(L1,L2, … L5)

3. The variation in surface luminance , The panel total variation (δ WHITE) is determined by measuring LN at each test position 1 through 13 and then defined as following numerical formula. For more information see FIG 2.

δ WHITE = Maximum(L1,L2, … L13) / Minimum(L1,L2, … L13)

4. Response time is the time required for the display to transition from white to black (rise time, TrR) and from black to white(Decay Time, TrD). For additional information see FIG 3.


5. Viewing angle is the angle at which the contrast ratio is greater than 10. The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to the LCD surface. For more information see FIG 4.

6. Gray scale specification * fV = 60Hz

Gray Level	Luminance [%] (Typ)
L0	0.13
L7	0.93
L15	4.53
L23	10.8
L31	20.3
L39	33.0
L47	49.0
L55	73.0
L63	100.0

FIG. 2 Luminance

<Measuring point for Average Luminance & measuring point for Luminance variation>

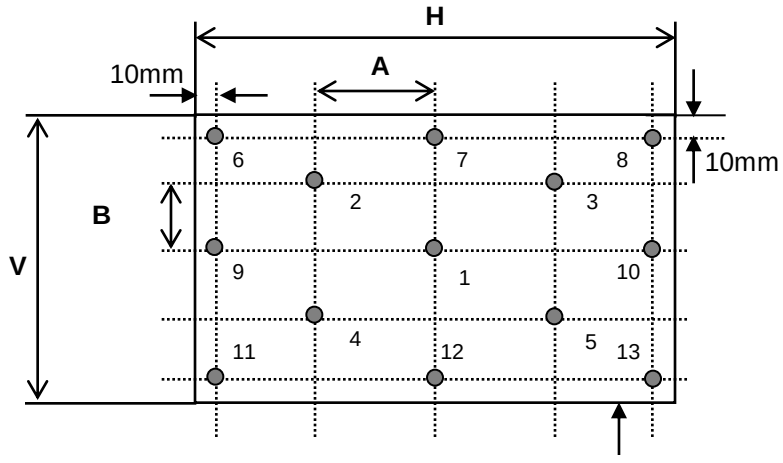

H,V : ACTIVE AREA
A : H/4 mm
B : V/4 mm
POINTS: 13 POINTS

FIG. 3 Response Time

The response time is defined as the following figure and shall be measured by switching the input signal for “black” and “white”.


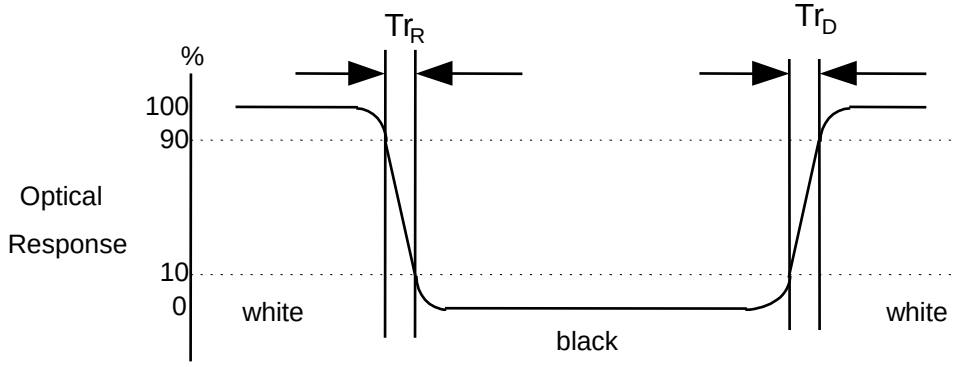


FIG. 4 Viewing angle

<Dimension of viewing angle range>

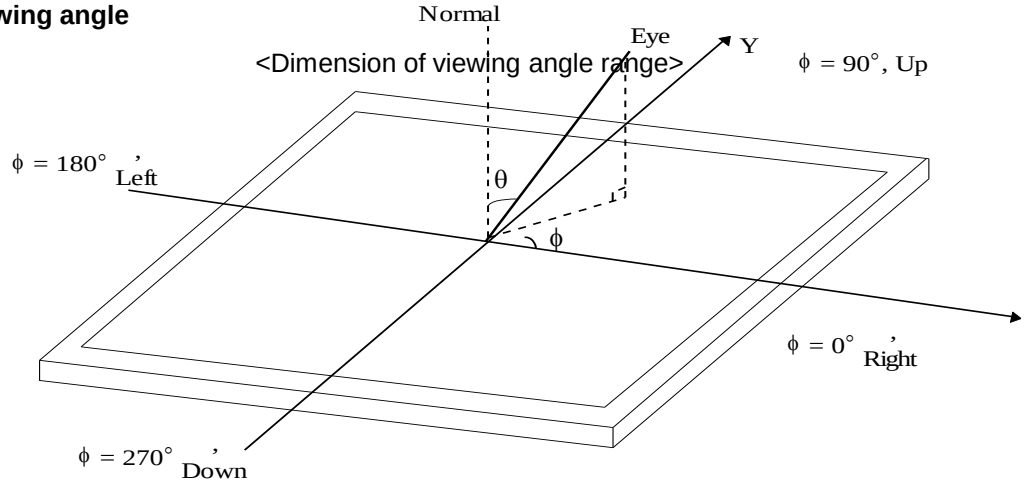


5. Mechanical Characteristics

The contents provide general mechanical characteristics for the model LP156WF4. In addition the figures in the next page are detailed mechanical drawing of the LCD.

Outline Dimension	Horizontal	359.5 ± 0.5mm
	Vertical	207.7 ± 0.5mm
	Thickness	3.4mm (max)
Bezel Area	Horizontal	347.55 ± 0.5mm
	Vertical	196.9 ± 0.5mm
Active Display Area	Horizontal	344.16 ± 0.3 mm
	Vertical	193.59 ± 0.3 mm
Weight	330g (Max.) / 320g (Typ.)	
Surface Treatment	Hard coating(3H), Anti-Glare treatment of the front polarizer	


<FRONT VIEW>

Note) Unit:[mm], General tolerance: ± 0.5mm

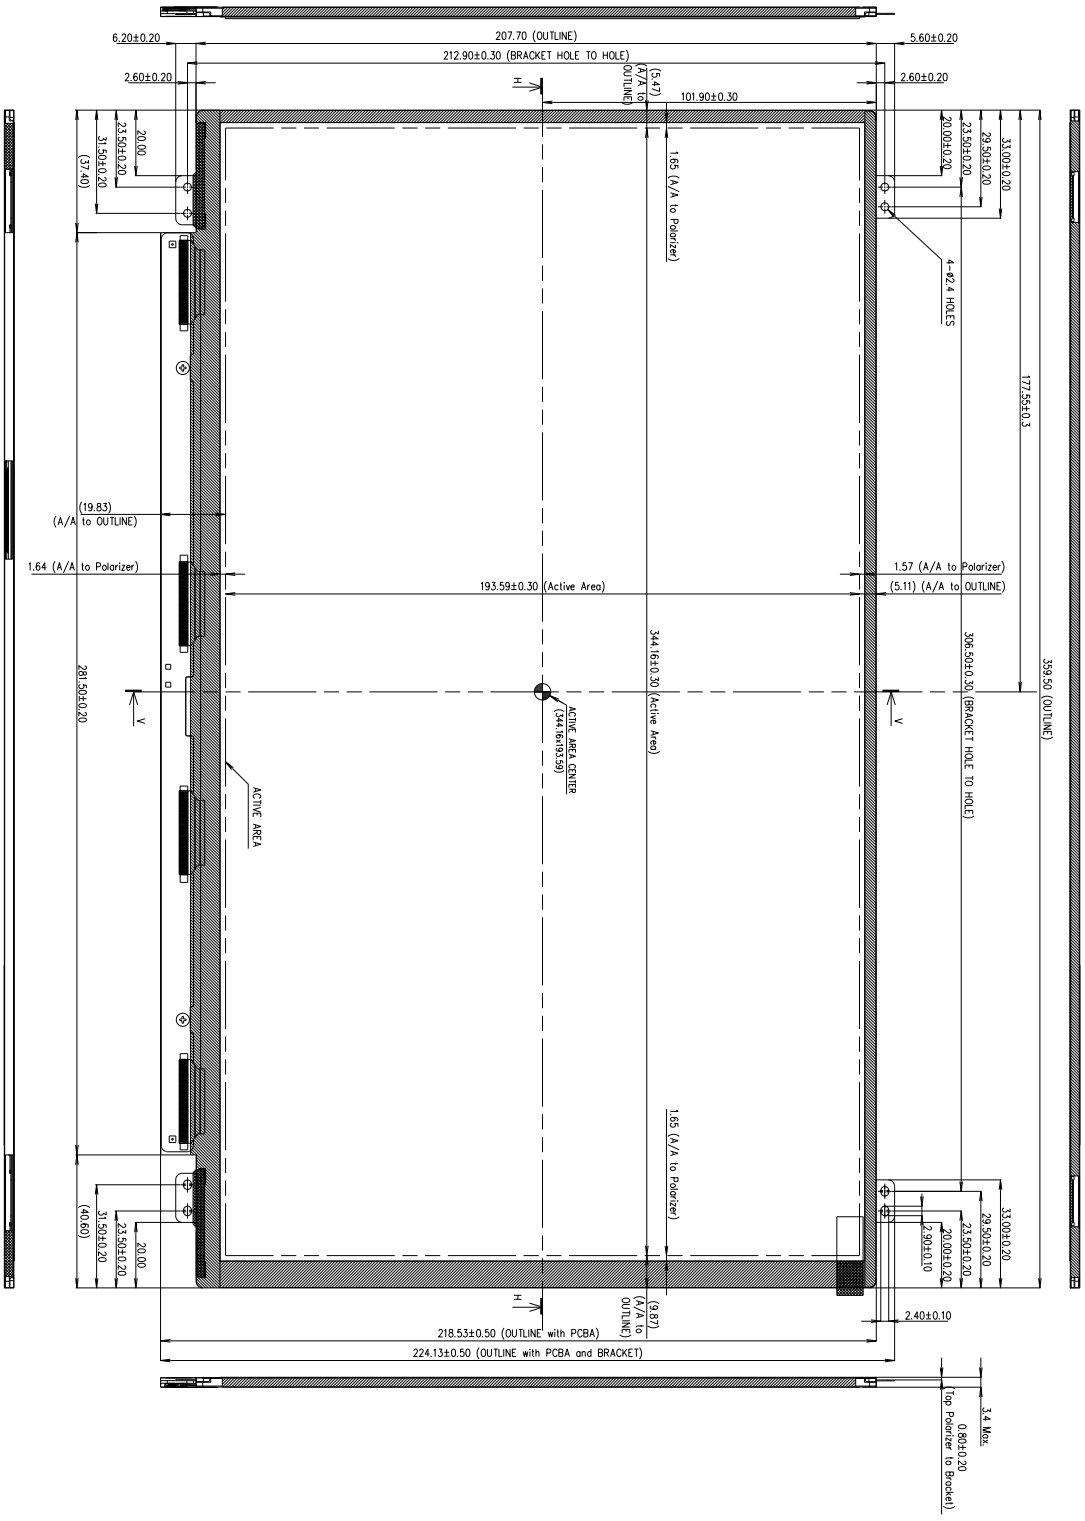

<REAR VIEW>

Note) Unit:[mm], General tolerance: ± 0.5mm

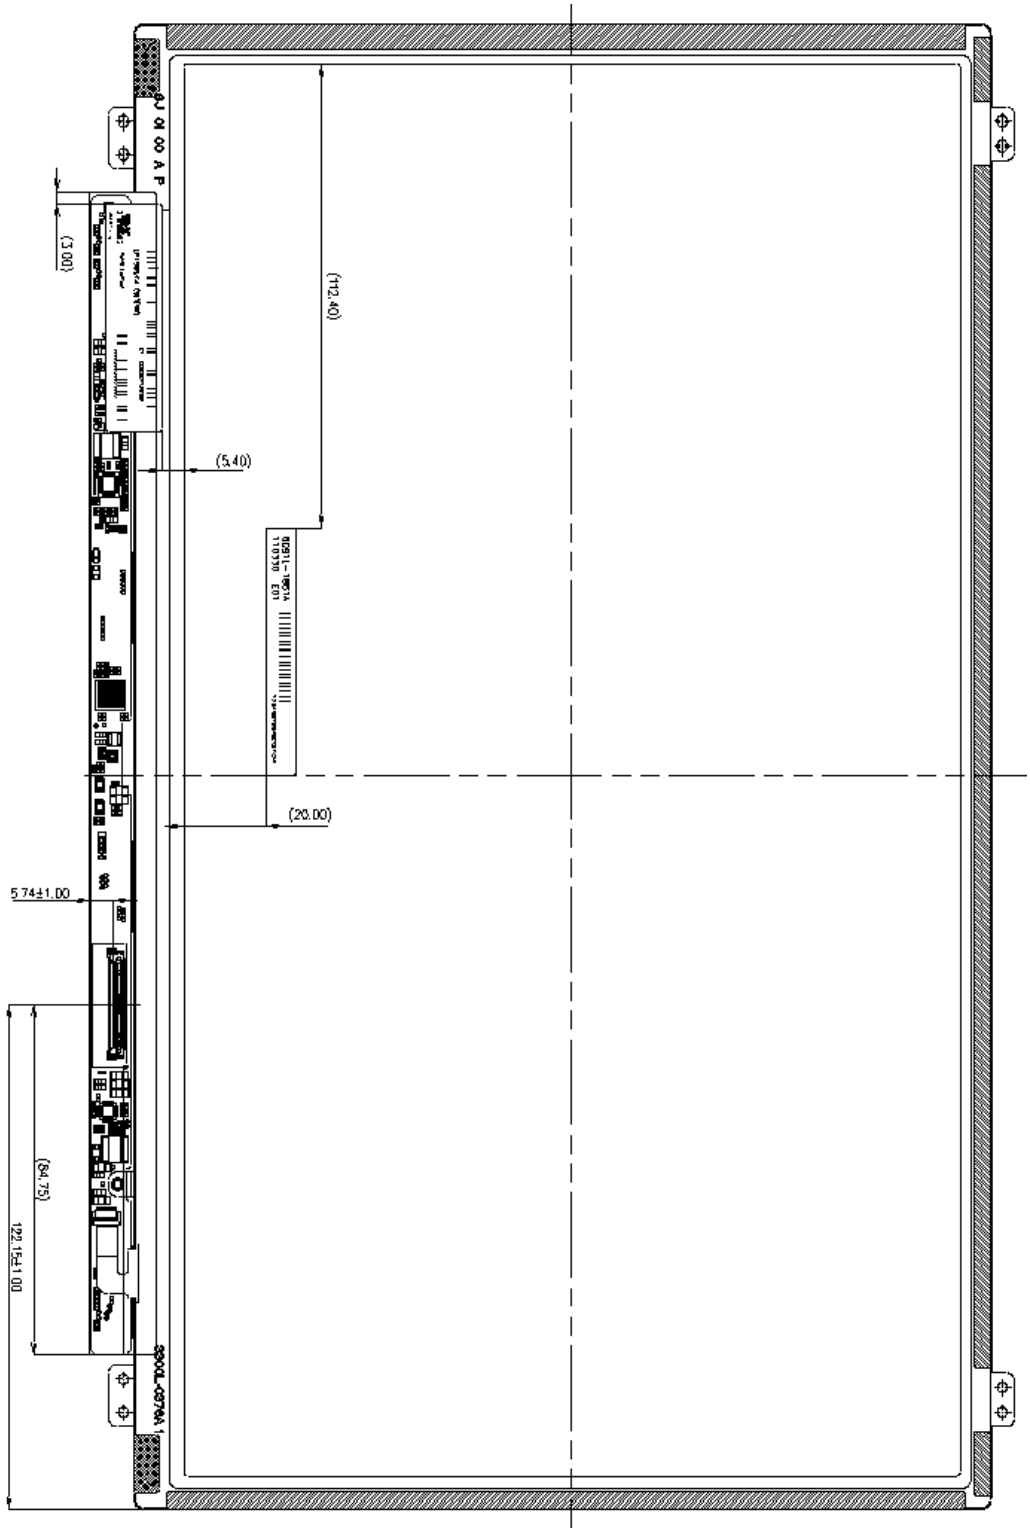

6. Reliability

Environment test condition

No.	Test Item	Conditions
1	High temperature storage test	Ta= 60°C, 240h
2	Low temperature storage test	Ta= -20°C, 240h
3	High temperature operation test	Ta= 50°C, 50%RH, 240h
4	Low temperature operation test	Ta= 0°C, 240h
5	Vibration test (non-operating)	Sine wave, 5 ~ 150Hz, 1.5G, 0.37oct/min 3 axis, 30min/axis
6	Shock test (non-operating)	- No functional or cosmetic defects following a shock to all 6 sides delivering at least 180 G in a half sine pulse no longer than 2 ms to the display module - No functional defects following a shock delivering at least 200 g in a half sine pulse no longer than 2 ms to each of 6 sides. Each of the 6 sides will be shock tested with one each display, for a total of 6 displays
7	Altitude operating storage / shipment	0 ~ 10,000 feet (3,048m) 24Hr 0 ~ 40,000 feet (12,192m) 24Hr

{ Result Evaluation Criteria }
There should be no change which might affect the practical display function when the display quality test is conducted under normal operating condition.

7. International Standards

7-1. Safety

a) UL 60950-1, Second Edition, Underwriters Laboratories Inc.
Information Technology Equipment - Safety - Part 1 : General Requirements.

b) CAN/CSA C22.2 No.60950-1-07, Second Edition, Canadian Standards Association.
Information Technology Equipment - Safety - Part 1 : General Requirements.

c) EN 60950-1:2006 + A11:2009, European Committee for Electrotechnical Standardization (CENELEC).
Information Technology Equipment - Safety - Part 1 : General Requirements.

d) IEC 60950-1:2005, Second Edition, The International Electrotechnical Commission (IEC).
Information Technology Equipment - Safety - Part 1 : General Requirements.

7-2. EMC

a) ANSI C63.4 “American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.” American National Standards Institute (ANSI), 2003.

b) CISPR 22 “Information technology equipment – Radio disturbance characteristics – Limit and methods of measurement." International Special Committee on Radio Interference (CISPR), 2005.

c) CISPR 13 “Sound and television broadcast receivers and associated equipment – Radio disturbance characteristics – Limits and method of measurement." International Special Committee on Radio Interference (CISPR), 2006.

7-3. Environment

a) RoHS, Directive 2002/95/EC of the European Parliament and of the council of 27 January 2003

8. Packing

8-1. Designation of Lot Mark

a) Lot Mark

A	B	C	D	E	F	G	H	I	J	K	L	M

A,B,C : SIZE(INCH)
E : MONTH
D : YEAR
F ~ M : SERIAL NO.

Note

1. YEAR

Year	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020
Mark	A	B	C	D	E	F	G	H	J	K

2. MONTH

Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Mark	1	2	3	4	5	6	7	8	9	A	B	C

b) Location of Lot Mark

Serial No. is printed on the label. The label is attached to the backside of the LCD module.
This is subject to change without prior notice.


8-2. Packing Form

a) Package quantity in one box : 20 pcs

b) Box Size : 478 x 365 x 328

8-3. Label Description

Model Name

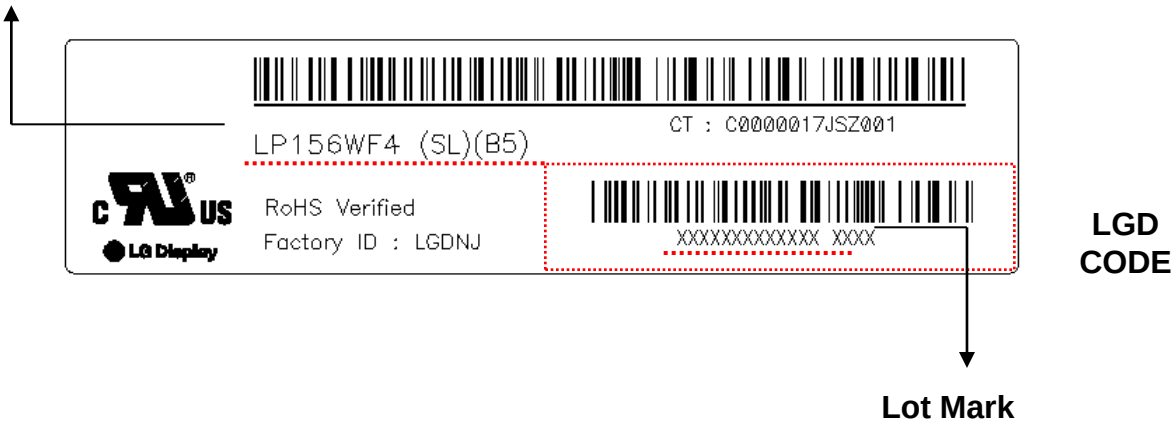

LGD Code

(1) Model Name : **L P 1 5 6 W F 4 - S L B 5**

- Revision Code
- Product Type
- Display Mode
- Basic Model Serial No.
- Resolution : FHD
- Size (inch) : 15.6”
- Application : NBPC
- LGD Brand Initial: L

(2) Lot Mark : **1 5 6 A B K Z 5 0 0 0 V K**

- SERIAL NO.
- MONTH
- YEAR
- SIZE

9. PRECAUTIONS

Please pay attention to the followings when you use this TFT LCD module.

9-1. MOUNTING PRECAUTIONS

(1) You must mount a module using holes arranged in four corners or four sides.
(2) You should consider the mounting structure so that uneven force (ex. Twisted stress) is not applied to the module. And the case on which a module is mounted should have sufficient strength so that external force is not transmitted directly to the module.
(3) Please attach the surface transparent protective plate to the surface in order to protect the polarizer. Transparent protective plate should have sufficient strength in order to the resist external force.
(4) You should adopt radiation structure to satisfy the temperature specification.
(5) Acetic acid type and chlorine type materials for the cover case are not desirable because the former generates corrosive gas of attacking the polarizer at high temperature and the latter causes circuit break by electro-chemical reaction.
(6) Do not touch, push or rub the exposed polarizers with glass, tweezers or anything harder than HB pencil lead. And please do not rub with dust clothes with chemical treatment.
Do not touch the surface of polarizer for bare hand or greasy cloth.(Some cosmetics are detrimental to the polarizer.)
(7) When the surface becomes dusty, please wipe gently with absorbent cotton or other soft materials like chamois soaks with petroleum benzene. Normal-hexane is recommended for cleaning the adhesives used to attach front / rear polarizers. Do not use acetone, toluene and alcohol because they cause chemical damage to the polarizer.
(8) Wipe off saliva or water drops as soon as possible. Their long time contact with polarizer causes deformations and color fading.
(9) Do not open the case because inside circuits do not have sufficient strength.
(10) When handling the LCD module, it needs to handle with care not to give mechanical stress to the PCB and Mounting Hole area."

9-2. OPERATING PRECAUTIONS

(1) The spike noise causes the mis-operation of circuits. It should be lower than following voltage :
V=± 200mV(Over and under shoot voltage)

(2) Response time depends on the temperature.(In lower temperature, it becomes longer.)
(3) Brightness depends on the temperature. (In lower temperature, it becomes lower.)
And in lower temperature, response time(required time that brightness is stable after turned on) becomes longer.
(4) Be careful for condensation at sudden temperature change. Condensation makes damage to polarizer or electrical contacted parts. And after fading condensation, smear or spot will occur.
(5) When fixed patterns are displayed for a long time, remnant image is likely to occur.
(6) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimized the interference.

9-3. ELECTROSTATIC DISCHARGE CONTROL

Since a module is composed of electronic circuits, it is not strong to electrostatic discharge. Make certain that treatment persons are connected to ground through wrist band etc. And don't touch interface pin directly.

9-4. PRECAUTIONS FOR STRONG LIGHT EXPOSURE

Strong light exposure causes degradation of polarizer and color filter.

9-5. STORAGE

When storing modules as spares for a long time, the following precautions are necessary.

(1) Store them in a dark place. Do not expose the module to sunlight or fluorescent light. Keep the temperature between 5°C and 35°C at normal humidity.
(2) The polarizer surface should not come in contact with any other object.
It is recommended that they be stored in the container in which they were shipped.

9-6. HANDLING PRECAUTIONS FOR PROTECTION FILM

(1) When the protection film is peeled off, static electricity is generated between the film and polarizer. This should be peeled off slowly and carefully by people who are electrically grounded and with well ion-blown equipment or in such a condition, etc.
(2) The protection film is attached to the polarizer with a small amount of glue. If some stress is applied to rub the protection film against the polarizer during the time you peel off the film, the glue is apt to remain on the polarizer.
Please carefully peel off the protection film without rubbing it against the polarizer.
(3) When the module with protection film attached is stored for a long time, sometimes there remains a very small amount of glue still on the polarizer after the protection film is peeled off.
(4) You can remove the glue easily. When the glue remains on the polarizer surface or its vestige is recognized, please wipe them off with absorbent cotton waste or other soft material like chamois soaked with normal-hexane.

APPENDIX A. Enhanced Extended Display Identification Data (EEDID™) 1/3

	Byte (Dec)	Byte (Hex)	Field Name and Comments	Value (Hex)	Value (Bin)
Header	0	**00**	Header	**00**	00000000
	1	**01**	Header	**FF**	11111111
	2	**02**	Header	**FF**	11111111
	3	**03**	Header	**FF**	11111111
	4	**04**	Header	**FF**	11111111
	5	**05**	Header	**FF**	11111111
	6	**06**	Header	**FF**	11111111
	7	**07**	Header	**00**	00000000
Vendor / Product EDID Version	8	**08**	EISA manufacture code (3 Character ID) LGD	**30**	00110000
	9	**09**	EISA manufacture code (Compressed ASCII)	**E4**	11100100
	10	**0A**	Panel Supplier Reserved - Product Code 037Eh	**7E**	01100100
	11	**0B**	(Hex. LSB first)	**03**	00000011
	12	**0C**	LCD Module Serial No - Preferred but Optional ("0" If not used)	**00**	00000000
	13	**0D**	LCD Module Serial No - Preferred but Optional ("0" If not used)	**00**	00000000
	14	**0E**	LCD Module Serial No - Preferred but Optional ("0" If not used)	**00**	00000000
	15	**0F**	LCD Module Serial No - Preferred but Optional ("0" If not used)	**00**	00000000
	16	**10**	Week of Manufacture 00 weeks	**00**	00000000
	17	**11**	Year of Manufacture 2011 years	**15**	00010101
	18	**12**	EDID structure version # = 1	**01**	00000001
	19	**13**	EDID revision # = 3	**03**	00000011
Display Parameters	20	**14**	Video input Definition = Digital signal	**80**	10000000
	21	**15**	Max H image size (Rounded cm) = 35 cm	**23**	00100011
	22	**16**	Max V image size (Rounded cm) = 19 cm	**13**	00010011
	23	**17**	Display gamma = (gamma*100)-100 = Example:(2.2*100)-100=120 = 2.2 Gamma	**78**	01111000
	24	**18**	Feature Support (no_DPMS, no_Active Off/Very Low Power, RGB color display, Timing BLK 1,no_ GTF)	**0A**	00001010
Panel Color Coordinates	25	**19**	Red/Green Low Bits (RxRy/GxGy)	**25**	10110110
	26	**1A**	Blue/White Low Bits (BxBy/WxWy)	**B5**	00100101
	27	**1B**	Red X Rx = 0.629	**A1**	10011110
	28	**1C**	Red Y Ry = 0.350	**59**	01011110
	29	**1D**	Green X Gx = 0.349	**59**	01011000
	30	**1E**	Green Y Gy = 0.614	**9D**	10011011
	31	**1F**	Blue X Bx = 0.154	**27**	00100110
	32	**20**	Blue Y By = 0.112	**1C**	00011101
	33	**21**	White X Wx = 0.313	**50**	01010000
	34	**22**	White Y Wy = 0.329	**54**	01010100
Established Timings	35	**23**	Established timing 1 (00h if not used)	**00**	00000000
	36	**24**	Established timing 2 (00h if not used)	**00**	00000000
	37	**25**	Manufacturer's timings (00h if not used)	**00**	00000000
Standard Timing ID	38	**26**	Standard timing ID1 (01h if not used)	**01**	00000001
	39	**27**	Standard timing ID1 (01h if not used)	**01**	00000001
	40	**28**	Standard timing ID2 (01h if not used)	**01**	00000001
	41	**29**	Standard timing ID2 (01h if not used)	**01**	00000001
	42	**2A**	Standard timing ID3 (01h if not used)	**01**	00000001
	43	**2B**	Standard timing ID3 (01h if not used)	**01**	00000001
	44	**2C**	Standard timing ID4 (01h if not used)	**01**	00000001
	45	**2D**	Standard timing ID4 (01h if not used)	**01**	00000001
	46	**2E**	Standard timing ID5 (01h if not used)	**01**	00000001
	47	**2F**	Standard timing ID5 (01h if not used)	**01**	00000001
	48	**30**	Standard timing ID6 (01h if not used)	**01**	00000001
	49	**31**	Standard timing ID6 (01h if not used)	**01**	00000001
	50	**32**	Standard timing ID7 (01h if not used)	**01**	00000001
	51	**33**	Standard timing ID7 (01h if not used)	**01**	00000001
	52	**34**	Standard timing ID8 (01h if not used)	**01**	00000001
	53	**35**	Standard timing ID8 (01h if not used)	**01**	00000001

APPENDIX A. Enhanced Extended Display Identification Data (EEDID™) 2/3

	Byte (Dec)	Byte (Hex)	Field Name and Comments	Value (Hex)	Value (Bin)
Timing Descriptor #1	54	**36**	Pixel Clock/10,000 (LSB) 149 MHz @ 60Hz	**34**	00110100
	55	**37**	Pixel Clock/10,000 (MSB)	**3A**	00111010
	56	**38**	Horizontal Active (lower 8 bits) 1920 Pixels	**80**	10000000
	57	**39**	Horizontal Blanking(Thp-HA) (lower 8 bits) 288 Pixels	**20**	00100000
	58	**3A**	Horizontal Active / Horizontal Blanking(Thp-HA) (upper 4:4bits)	**71**	01110001
	59	**3B**	Vertical Avtive 1080 Lines	**38**	00111000
	60	**3C**	Vertical Blanking (Tvp-HA) (DE Blanking typ.for DE only panels) 44 Lines	**2C**	00101100
	61	**3D**	Vertical Active : Vertical Blanking (Tvp-HA) (upper 4:4bits)	**40**	01000000
	62	**3E**	Horizontal Sync. Offset (Thfp) 48 Pixels	**30**	00110000
	63	**3F**	Horizontal Sync Pulse Width (HSPW) 72 Pixels	**48**	01001000
	64	**40**	Vertical Sync Offset(Tvfp) : Sync Width (VSPW) 3 Lines : 5 Lines	**35**	00110101
	65	**41**	Horizontal Vertical Sync Offset/Width (upper 2bits)	**00**	00000000
	66	**42**	Horizontal Image Size (mm) 345 mm	**59**	01011001
	67	**43**	Vertical Image Size (mm) 194 mm	**C2**	11000010
	68	**44**	Horizontal Image Size / Vertical Image Size	**10**	00010000
	69	**45**	Horizontal Border = 0 (Zero for Notebook LCD)	**00**	00000000
	70	**46**	Vertical Border = 0 (Zero for Notebook LCD)	**00**	00000000
	71	**47**	Non-Interlace, Normal display, no stereo, Digital Separate (Vsync_NEG, Hsync_NEG), DE only note : LSB is set to '1' if panel is DE-timing only. H/V can be ignored.	**19**	00011001
Timing Descriptor #2	72	**48**	Flag	**00**	00000000
	73	**49**	Flag	**00**	00000000
	74	**4A**	Flag	**00**	00000000
	75	**4B**	Data Type Tag (Descriptor Defined by manufacturer)	**00**	00000000
	76	**4C**	Flag	**00**	00000000
	77	**4D**	Descriptor Defined by manufacturer	**00**	00000000
	78	**4E**	Descriptor Defined by manufacturer	**00**	00000000
	79	**4F**	Descriptor Defined by manufacturer	**00**	00000000
	80	**50**	Descriptor Defined by manufacturer	**00**	00000000
	81	**51**	Descriptor Defined by manufacturer	**00**	00000000
	82	**52**	Descriptor Defined by manufacturer	**00**	00000000
	83	**53**	Descriptor Defined by manufacturer	**00**	00000000
	84	**54**	Descriptor Defined by manufacturer	**00**	00000000
	85	**55**	Descriptor Defined by manufacturer	**00**	00000000
	86	**56**	Descriptor Defined by manufacturer	**00**	00000000
	87	**57**	Descriptor Defined by manufacturer	**00**	00000000
	88	**58**	Descriptor Defined by manufacturer	**00**	00000000
	89	**59**	Descriptor Defined by manufacturer	**00**	00000000
Timing Descriptor #3	90	**5A**	Flag	**00**	00000000
	91	**5B**	Flag	**00**	00000000
	92	**5C**	Flag	**00**	00000000
	93	**5D**	Data Type Tag (ASCII String)	**FE**	11111110
	94	**5E**	Flag	**00**	00000000
	95	**5F**	ASCII String L	**4C**	01001100
	96	**60**	ASCII String G	**47**	01000111
	97	**61**	ASCII String	**20**	00100000
	98	**62**	ASCII String D	**44**	01000100
	99	**63**	ASCII String i	**69**	01101001
	100	**64**	ASCII String s	**73**	01110011
	101	**65**	ASCII String p	**70**	01110000
	102	**66**	ASCII String l	**6C**	01101100
	103	**67**	ASCII String a	**61**	01100001
	104	**68**	ASCII String y	**79**	01111001
	105	**69**	Manufacturer P/N(If<13 char--> 0Ah, then terminate with ASCⅡ code 0Ah,set remaining char = 2(	**0A**	00001010
	106	**6A**	Manufacturer P/N(If<13 char--> 0Ah, then terminate with ASCⅡ code 0Ah,set remaining char = 2(	**20**	00100000
	107	**6B**	Manufacturer P/N(If<13 char--> 0Ah, then terminate with ASCⅡ code 0Ah,set remaining char = 2(	**20**	00100000

APPENDIX A. Enhanced Extended Display Identification Data (EEDID™) 3/3

	Byte (Dec)	Byte (Hex)	Field Name and Comments		Value (Hex)	Value (Bin)
Timing Descriptor #4	108	**6C**	Flag		**00**	00000000
	109	**6D**	Flag		**00**	00000000
	110	**6E**	Flag		**00**	00000000
	111	**6F**	Data Type Tag (ASCII String)		**FE**	11111110
	112	**70**	Flag		**00**	00000000
	113	**71**	ASCII String	L	**4C**	01001100
	114	**72**	ASCII String	P	**50**	01010000
	115	**73**	ASCII String	1	**31**	00110001
	116	**74**	ASCII String	5	**35**	00110101
	117	**75**	ASCII String	6	**36**	00110110
	118	**76**	ASCII String	W	**57**	01010111
	119	**77**	ASCII String	F	**46**	01000110
	120	**78**	ASCII String	4	**34**	00110100
	121	**79**	ASCII String	-	**2D**	00101101
	122	**7A**	ASCII String	S	**53**	01010011
	123	**7B**	ASCII String	L	**4C**	01001100
	124	**7C**	ASCII String	B	**42**	01000010
	125	**7D**	ASCII String	5	**35**	00110100
Checksum	126	**7E**	Extension flag (# of optional 128 panel ID extension block to follow, Typ = 0)		**00**	00000000
	127	**7F**	Check Sum (The 1-byte sum of all 128 bytes in this panel ID block shall = 0)		**30**	01001011

Our company network supports you worldwide with offices in Germany, Great Britain, Italy, Turkey and the USA. For more information please contact:

DATA DISPLAY GROUP

Distec GmbH
Augsburger Str. 2b
82110 Germering
Germany

Phone: +49 (0)89 / 89 43 63-0
Fax: +49 (0)89 / 89 43 63-131
E-Mail: info@datadisplay-group.de
Internet: www.datadisplay-group.de

Display Technology Ltd.
5 The Oaks Business Village
Revenge Road, Lordswood
Chatham, Kent, ME5 8LF
United Kingdom
Phone: +44 (0)1634 / 67 27 55
Fax: +44 (0)1634 / 67 27 54
E-Mail: info@datadisplay-group.co.uk
Internet: www.datadisplay-group.co.uk

Apollo Display Technologies, Corp.
87 Raynor Avenue, Unit 1Ronkonkoma, NY
11779
United States of America
Phone: +1 631 / 580-43 60
Fax: +1 631 / 580-43 70
E-Mail: info@datadisplay-group.com
Internet: www.datadisplay-group.com

Sales Partner:

REM Italy s.a.s.
di Michieletto Flavio & C.
Via Obbia Bassa, 10
I-35010 Trebaseleghe (PD)
Italy
Phone: +39 335 521 37 89
E-Mail: info@remitaly.com
Internet:www.remitaly.com

Sales Partner:

DATA DISPLAY BİLİŞİM TEKNOLOJİLERİ İÇ VE DIŞ TİCARET LİMİTED ŞİRKETİ
Barbaros Mh Ak Zamabak Sk A Blok
D:143 Ataşehir/İstanbul
Turkey
Phone: +90 (0)216 / 688 04 68
Fax: +90 (0)216 / 688 04 69
E-Mail: info@data-display.com.tr
Internet:www.data-display.com.tr