
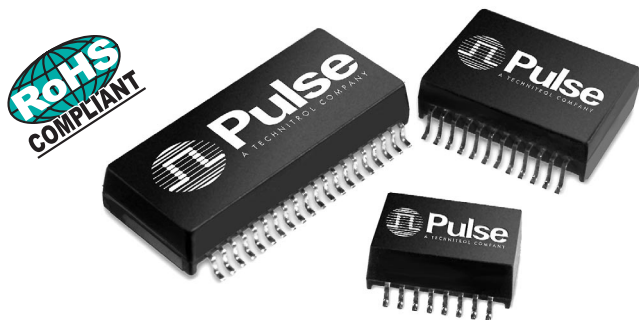


# Star Magnetics™ Gigabit Transformer Modules with PoE\* Option

\*Power over Ethernet

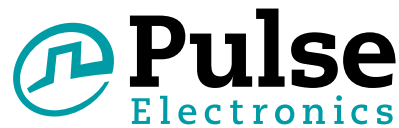

- RoHS reflow temperature rating 245° C
- Meets IEEE 802.3 specification
- Compact footprint

## Electrical Specifications @ 25°C — Operating Temperature 0°C to 70°C


| RoHS Compliant Part Number | PoE | Turns Ratio |     | Number of Ports | Insertion Loss (dB MAX) |         |         | Return Loss (Zout = 100 Ω ±15%) |        |        |         | Crosstalk (adjacent channels dB MIN) |        |         | Hipot (Vrms MIN) |
|----------------------------|-----|-------------|-----|-----------------|-------------------------|---------|---------|---------------------------------|--------|--------|---------|--------------------------------------|--------|---------|------------------|
|                            |     | Tx          | Rx  |                 | 0.1 MHz                 | 100 MHz | 125 MHz | 30 MHz                          | 60 MHz | 80 MHz | 100 MHz | 30 MHz                               | 60 MHz | 100 MHz |                  |
| H5062NL <sup>2a</sup>      | No  | 1:1         | 1:1 | 1               | -1.1                    | -1.0    | -2.0    | -18                             | -12    | -12    | -10     | -43                                  | -37    | -33     | 1500             |
| H6062NL <sup>2a</sup>      | Yes | 1:1         | 1:1 | 1               | -1.1                    | -1.0    | -2.0    | -18                             | -12    | -12    | -10     | -43                                  | -37    | -33     | 1500             |
| H6080NL <sup>2a</sup>      | Yes | 1:1         | 1:1 | 2               | -1.1                    | -1.0    | -2.0    | -18                             | -12    | -12    | -10     | -43                                  | -37    | -33     | 1500             |

1. For Tape & Reel packaging add a "T" suffix to the end of the part number when ordering, e.g. H5062NLT

2. MSL = Moisture Sensitivity Level a=1 b=2 c=3 d=4 e=5

## Mechanicals

### H5062NL

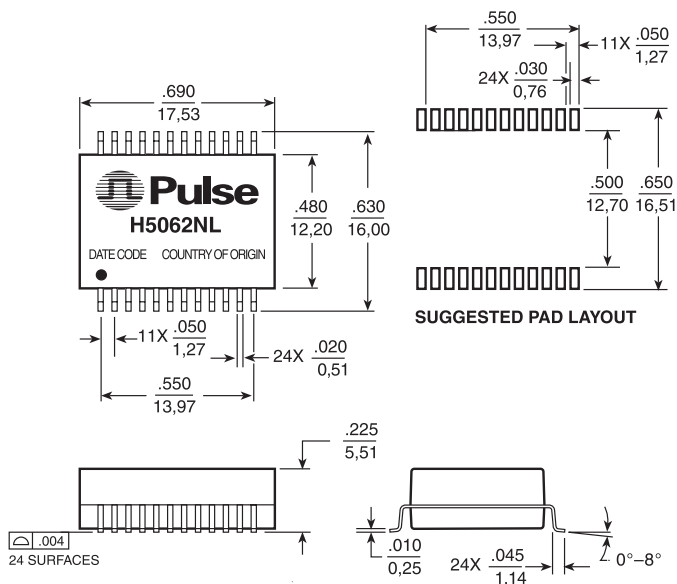


Weight ..... 2.7 grams  
Tape & Reel ..... 300/reel  
Tube ..... 25/tube

Dimensions:  $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified, all tolerances are  $\pm \frac{.010}{0.25}$

### H6062NL

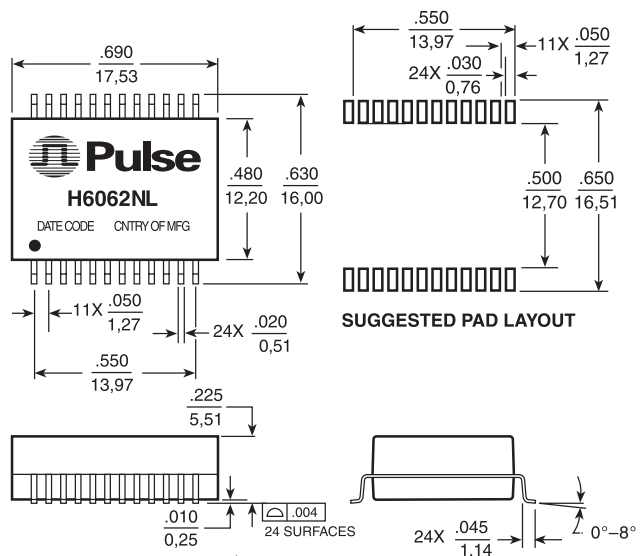

Weight ..... 2.63 grams  
Tape & Reel ..... 300/reel  
Tube ..... 25

\*Power over Ethernet



**H6080NL**

DATE CODE COUNTRY OF ORIGIN

**SUGGESTED LAND PATTERN**

**Weight** . . . . . 4.0 grams  
**Tape & Reel** . . . . . 250/reel  
**Tube** . . . . . 15/tube

Figure 1 shows four schematic diagrams of transformer-based power supply units (TCT1, TCT2, TCT3, TCT4) for a 100 W LED lamp. Each diagram illustrates a 1:1 transformer with a primary winding connected to a 220 V AC source and a secondary winding connected to a full-bridge rectifier. The rectifier output is connected to a filter capacitor and a load. The output voltages are labeled as MCT1, MX1+, MX1-, MCT2, MX2+, MX2-, MCT3, MX3+, MX3-, and MCT4, MX4+, MX4-.

**CHANNEL 1**

TD1+ 2

TCT1 1

TD1- 3

23 MX1+

24 MCT1

22 MX1-

1:1

**CHANNEL 2**

TD2+ 5

TCT2 4

TD2- 6

20 MX2+

21 MCT2

19 MX2-

1:1

**CHANNEL 3**

TD3+ 8

TCT3 7

TD3- 9

17 MX3+

18 MCT3

16 MX3-

1:1

**CHANNEL 4**

TD4+ 11

TCT4 10

TD4- 12

14 MX4+

15 MCT4

13 MX4-


1:1

**LEGEND**

|      |    |   |    |
|------|----|---|----|
| CHIP | Td | ↔ | Mx |
|      | Td | ↔ | Mx |
| SIDE | Td | ↔ | Mx |
|      | Td | ↔ | Mx |


# Star Magnetics™ Gigabit Transformer Modules with PoE\* Option

\*Power over Ethernet

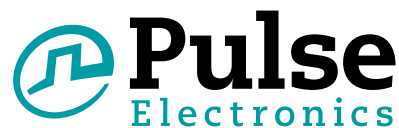

## Schematics (continued)

### H6080NL

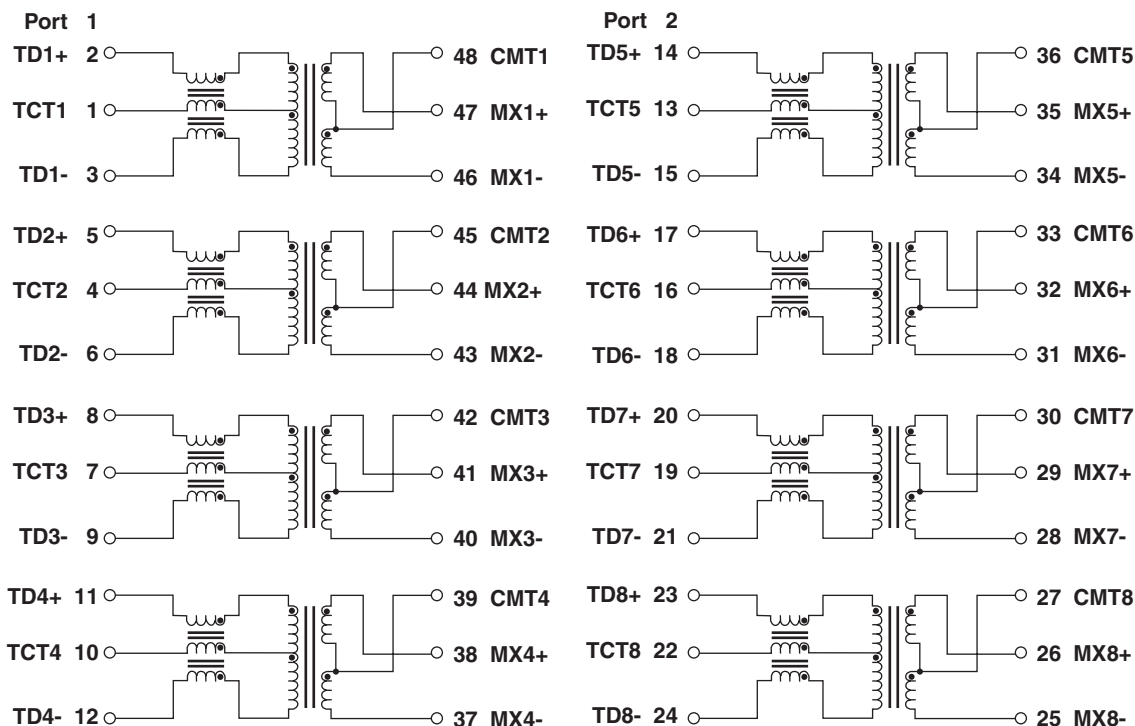

## For More Information:

### Pulse Worldwide Headquarters

12220 World Trade Dr.  
San Diego, CA 92128  
U.S.A.

Tel: 858 674 8100  
Fax: 858 674 8262

### Pulse Europe

Zeppelinstrasse 15  
D-71083 Herrenberg  
Germany

Tel: 49 7032 7806 0  
Fax: 49 7032 7806 135

### Pulse China Headquarters

B402, Shenzhen Academy of  
Aerospace Technology Bldg.  
10th Kejinan Rd.  
High-Tech Zone  
Nanshan District  
Shenzhen, PR China 518057

Tel: 86 755 33966678  
Fax: 86 755 33966700

### Pulse North China

Room 2704/2705  
Super Ocean Finance Ctr.  
2067 Yan An Rd. West  
Shanghai 200336  
China

Tel: 86 21 62787060  
Fax: 86 2162786973

### Pulse South Asia

135 Joo Seng Rd.  
#03-02  
PM Industrial Bldg.  
Singapore 368363

Tel: 65 6287 8998  
Fax: 65 6287 8998

### Pulse North Asia

3F, No. 198  
Zhongyuan Rd.  
Zhongli City  
Taoyuan County 320  
Taiwan R. O. C.

Tel: 886 3 4356768  
Fax: 886 3 4356823 (Pulse)  
Fax: 886 3 4356820 (FRE)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2011. Pulse Engineering, Inc. All rights reserved.