

SD101A, SD101B, SD101C

1N17630

BKC International
Electronics Inc.6 Lake Street
PO Box 1436
Lawrence, MA 01841
(617) 681-0392
(508) 681-0392

Gold Bond Germanium Diodes

TYPE GL607

FEATURES Low forward voltage drop
 --low power consumption
 Thirty years of proven reliability
 --one million hours mean time between failures (MTBF)
 Very low noise level
 Metallurgically bonded

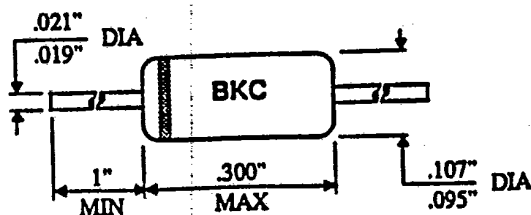
ABSOLUTE MAXIMUM RATINGS

Peak Inverse Voltage -	10V	@ 25 C
Peak Forward Current -	300mA	unless
Operating Temperature Range -	50 C to 75 C	otherwise
Average Power Dissipation -	80 mW	specified

ELECTRICAL
CHARACTERISTICS

	Symbol	Condition	Min.	Max.	Unit	T C
Peak Inverse	PIV	100uA	10		volts	25 C
Reverse Current	I _r	1V		2	uA	25 C
Forward Voltage	V _f	1mA		.34	volts	25 C
Forward Voltage	V _f	10mA		.45	volts	25 C
Capacitance	C	0.1V, 1mHz		3	pf	25 C

MECHANICAL



Passes all mechanical and
 environmental requirements
 of MIL-S-19500, including
 shock and vibration.

BKC INTERNATIONAL ELECTRONICS, INC.
6 LAKE STREET, LAWRENCE, MA 01841
TEL NO. (508) 681-0392

TYPE
DA47
GOLD BONDED, GERMANIUM DIODE

ABSOLUTE MAXIMUM RATINGS

PEAK REVERSE VOLTAGE	25V
RECURRENT PEAK FORWARD	100mA
POWER DISSIPATION	80mW
OPERATING TEMPERATURE	-65 TO +75 DEGREES CELSIUS
STORAGE TEMPERATURE	+90 DEGREES CELSIUS

CHARACTERISTICS

PARA	VF	IR	PIV	Trr
COND	10mA	25V	100uA	*
TA	25C	25C	25C	25C
LIMITS				
MIN	-----	-----	25V	-----
MAX	.450V	100uA	-----	70nS

*Trr CONDITIONS ARE QS= 10mA, PC= 150 MAX

PACKAGE CONFIGURATION

GLASS CASE JEDEC DO-7
(INCHES)
LEAD LENGTH 1.065 MAX
LEAD DIAMETER .020 $\pm$.002
BODY LENGTH .275 MAX.
BODY DIAMETER .100 MAX.

MARKING

BLACK CATHODE BAND & BLACK DIGITAL PRINT

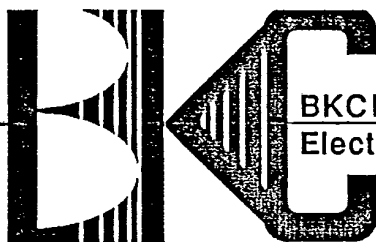
Type No. OA90

T-01-07

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841

Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



BKC International
Electronics Inc.

FEATURES

Low forward voltage drop—low power consumption

Thirty years of proven reliability—one million hours mean time between failures (MTBF)

Very low noise level

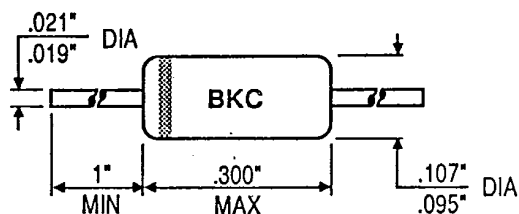
Metallurgically bonded

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	30 Volts
Peak Forward Current	500 mA
Operating Temperature	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	30		V	25 °C
Reverse Current	I _r	10 V		20	μA	25 °C
Forward Voltage	V _f	10 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. OA91

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841

Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



BKC International
Electronics Inc.

FEATURES

Low forward voltage drop—low power consumption

Thirty years of proven reliability—one million hours mean time between failures (MTBF)

Very low noise level

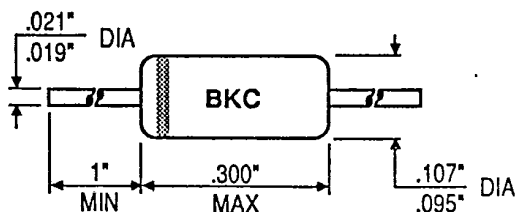
Metallurgically bonded

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	115 Volts
Peak Forward Current	500 mA
Operating Temperature	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	115		V	25 °C
Reverse Current	I _r	100 V		80	μA	25 °C
Forward Voltage	V _f	10 mA		1.2	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. OA95

T-01-07

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841

Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



BKC International
Electronics Inc.

FEATURES

Low forward voltage drop—low power consumption

Thirty years of proven reliability—one million hours mean time between failures (MTBF)

Very low noise level

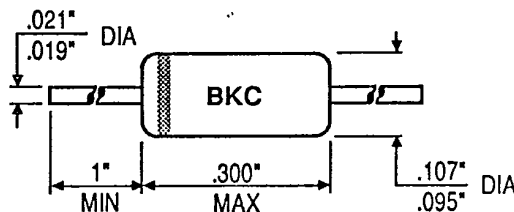
Metallurgically bonded

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	115 Volts
Peak Forward Current	500 mA
Operating Temperature	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	115		V	25 °C
Reverse Current	I _r	40 V		30	μA	25 °C
Forward Voltage	V _f	10 mA		1.05	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. OA180

T-03-07

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841

Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



BKC International
Electronics Inc.

FEATURES

Low forward voltage drop—low power consumption

Thirty years of proven reliability—one million hours mean time between failures (MTBF)

Very low noise level

Metallurgically bonded

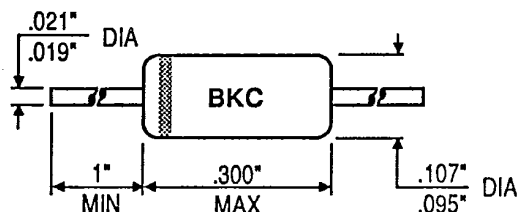
ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	20 Volts
Peak Forward Current	500 mA
Operating Temperature	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	20		V	25 °C
Reverse Current	I _r	10 V		20	μA	25 °C
Forward Voltage	V _f	100 mA		0.75	V	25 °C
Reverse Recovery	T _{rr}	See note		70		

NOTE: I_f = 10, V_r = 1, Recover to 10 mA.

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. OA1154

T-01-07

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841

Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



BKC International
Electronics Inc.

FEATURES

Low forward voltage drop—low power consumption

Thirty years of proven reliability—one million hours mean time between failures (MTBF)

Very low noise level

Metallurgically bonded

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage 55 Volts

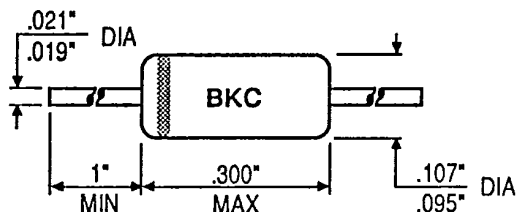
Peak Forward Current 500 mA

Operating Temperature - 65 °C to 85 °C

Average Power Dissipation 80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	55		V	25 °C
Reverse Current	I _r	40 V		30	μA	25 °C
Forward Voltage	V _f	10 mA		1.2	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. OA1161

T-01-07

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841

Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



BKC International
Electronics Inc.

FEATURES

Low forward voltage drop—low power consumption

Thirty years of proven reliability—one million hours mean time between failures (MTBF)

Very low noise level

Metallurgically bonded

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage 140 Volts

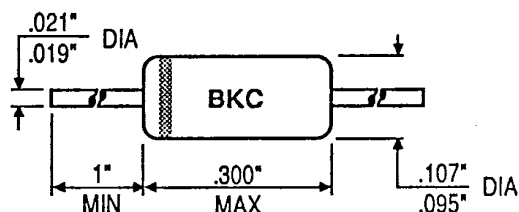
Peak Forward Current 500 mA

Operating Temperature - 65 °C to 85 °C

Average Power Dissipation 80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	140		V	25 °C
Reverse Current	I _r	100 V		55	μA	25 °C
Forward Voltage	V _f	10 mA		1.4	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. OA1180

T-01-07

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841

Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



BKC International
Electronics Inc.

FEATURES

Low forward voltage drop—low power consumption

Thirty years of proven reliability—one million hours mean time between failures (MTBF)

Very low noise level

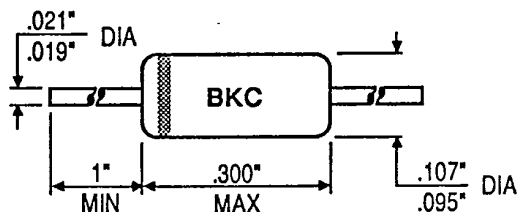
Metallurgically bonded

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	30 Volts
Peak Forward Current	500 mA
Operating Temperature	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	30		V	25 °C
Reverse Current	I _r	10 V		20	μA	25 °C
Forward Voltage	V _f	100 mA		0.75	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. OA1182

T-01-07

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841

Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



BKC International
Electronics Inc.

FEATURES

Low forward voltage drop—low power consumption

Thirty years of proven reliability—one million hours mean time between failures (MTBF)

Very low noise level

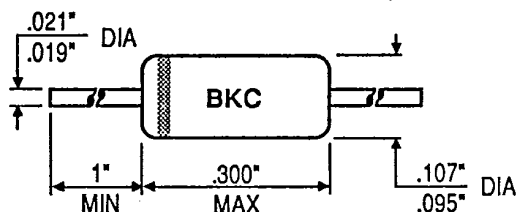
Metallurgically bonded

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	100 Volts
Peak Forward Current	500 mA
Operating Temperature	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	100		V	25 °C
Reverse Current	I _r	60 V		20	μA	25 °C
Forward Voltage	V _f	100 mA		0.85	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N34

T-01-07

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841

Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



BKC International
Electronics Inc.

FEATURES

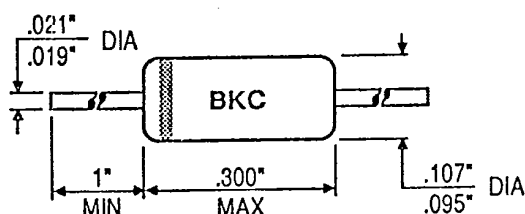
Low forward voltage drop—low power consumption
Thirty years of proven reliability—one million hours mean time between failures (MTBF)
Very low noise level
Metallurgically bonded

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	60 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	60		V	25 °C
Reverse Current	I _r	10 V		15	μA	25 °C
Reverse Current	I _r	50 V		800	μA	°C
Forward Voltage	V _f	8.5 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.