TAI-SAW TECHNOLOGY CO., LTD.
No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.
TEL: 886-3-4690038 FAX: 886-3-4697532
E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Product Specifications Approval Sheet

Product Name: SAW IF Filter 942 MHz(package 5.0mm x 7.0 mm)

TST Parts No.: TB0841A

Customer Parts No.:_____

Customer signature required

Company:_____

Division:_____

Approved by :_____

Date:_____

Checked by: Kazuma Lee

Approval by: Francis Chen

Date: 11 / 24 / 2010

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes.

TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.
TEL: 886-3-4690038 FAX: 886-3-4697532
E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

IF SAW Filter 942MHz SMD 5.0X7.0mm

MODEL NO.: TB0841A REV. NO.1

RoHS Compliant
Lead free
Lead-free soldering

A. MAXIMUM RATING:

1. 1. Operating temperature range: -40°C to 85°C
2. Storage temperature range: -40°C to 85°C
3. Input Power Level : 10 dBm
4. Maximum DC Voltage : 10V

B. Characteristics :

Characteristics		Value		
		Min.		Max.
Center frequency F_C	MHz	-	942	-
Maximum Insertion loss I.L.	dB	-	27.5	30.0
3dB Band Width	MHz	24.0	27.8	-
30B Band Width	MHz	-	30	33
Passband Ripple in F_C±10 MHz	dB	-	0.5	1.2
Group Delay in F_C±10 MHz	nsec	-	40	120
Absolute delay	usec	-	0.80	-
Single Input Impedance	Ohm	-	50	-
Single Output Impedance	Ohm	-	50	-
Temperature Coefficient	ppm/°C	-	-0.036	-

C. Frequency Responses:

1. Wide band response

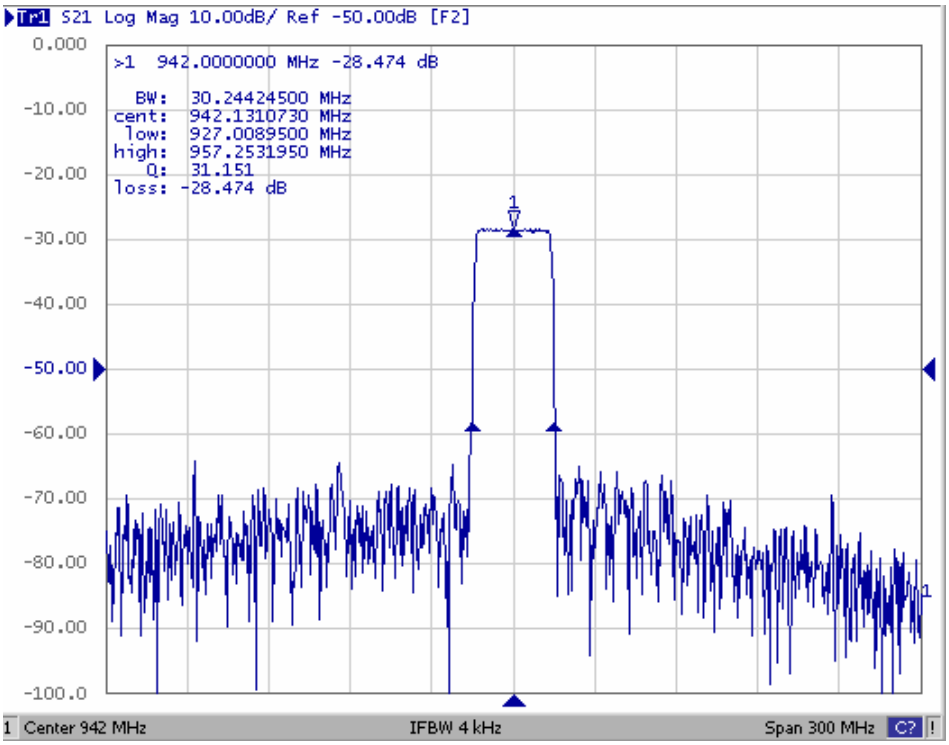


Fig1. Horizontal: 30MHz/Div Vertical: 10dB/Div

2. Pass band & Group Delay response


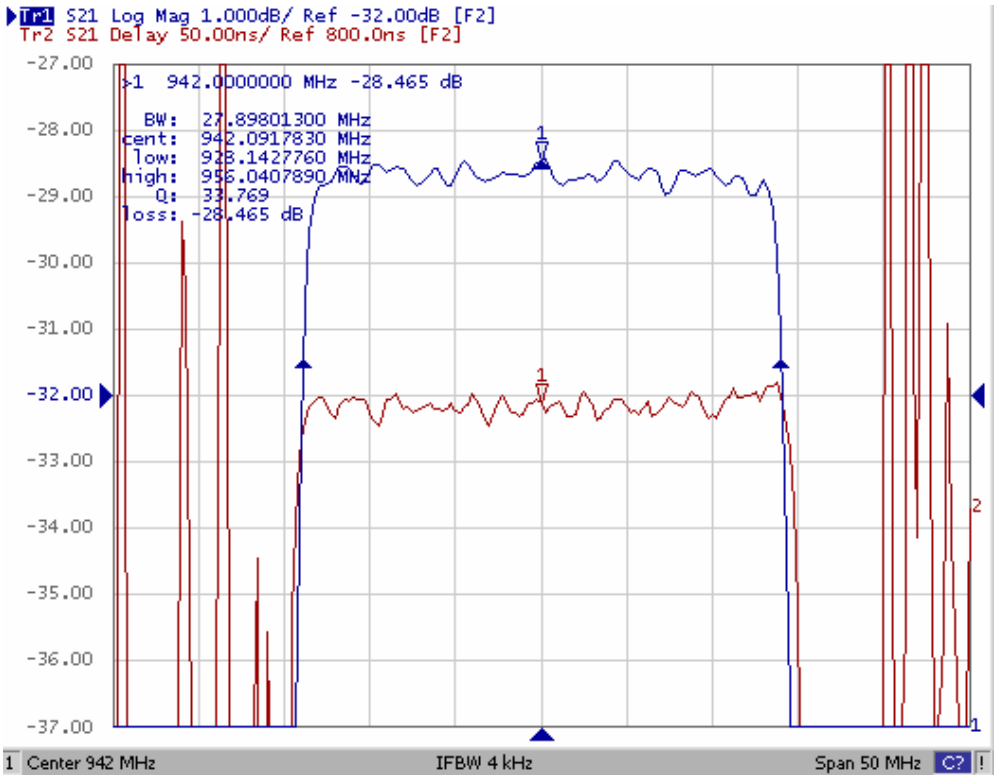


Fig2. Horizontal: 5MHz/Div Vertical: 1dB/Div
Vertical: 50ns/Div

D. Outline Drawing:

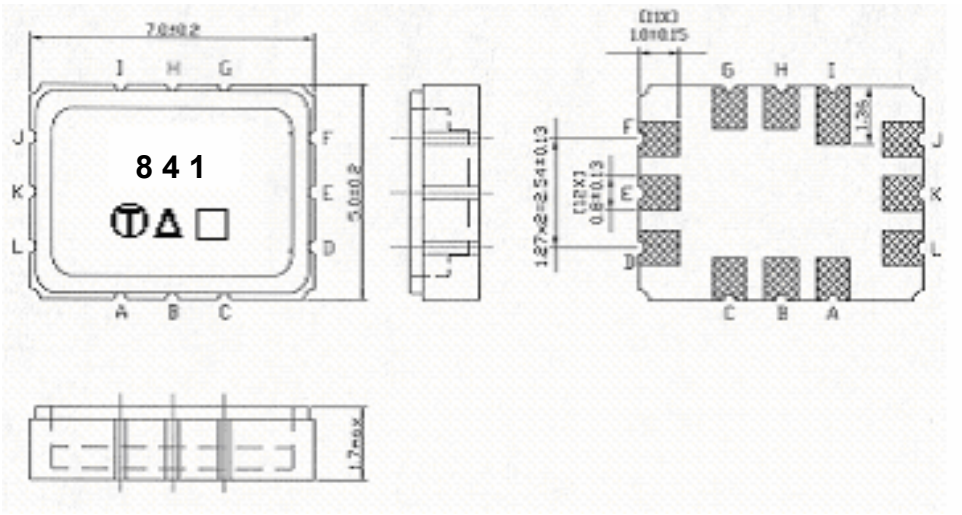

Pin J –RF input

Pin D –RF output

Pin A,B,C,E.F.G,H,I.K.L - Ground


□ : Week Code (Follow the table from planner each year)

Unit : mm

△ : Product / Year Code


Year	2009 2013	2010 2014	2011 2015	2012 2016
Product Code	B	b	B	b

E. Measurement Circuit:

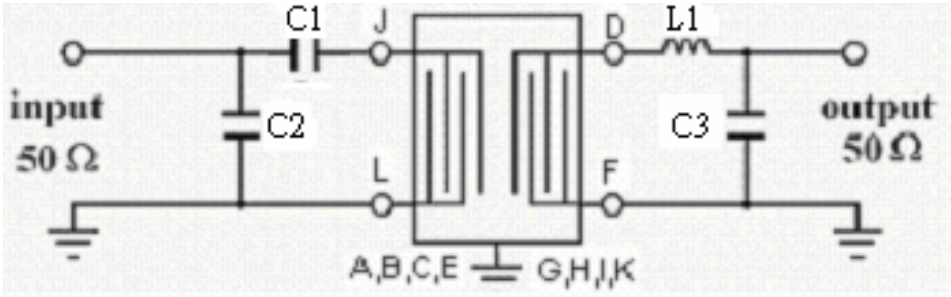


L1=3nH C1=27pF C2=9F C3=9F

F. PCB Footprint

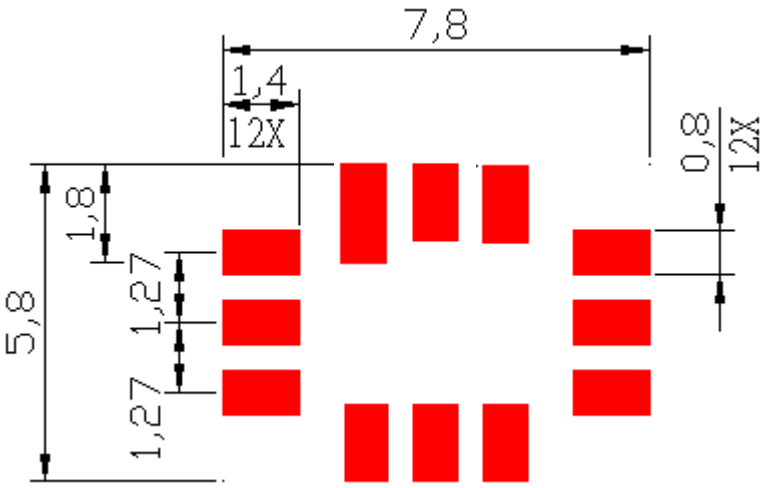


G. PACKING:

1. REEL DIMENSION

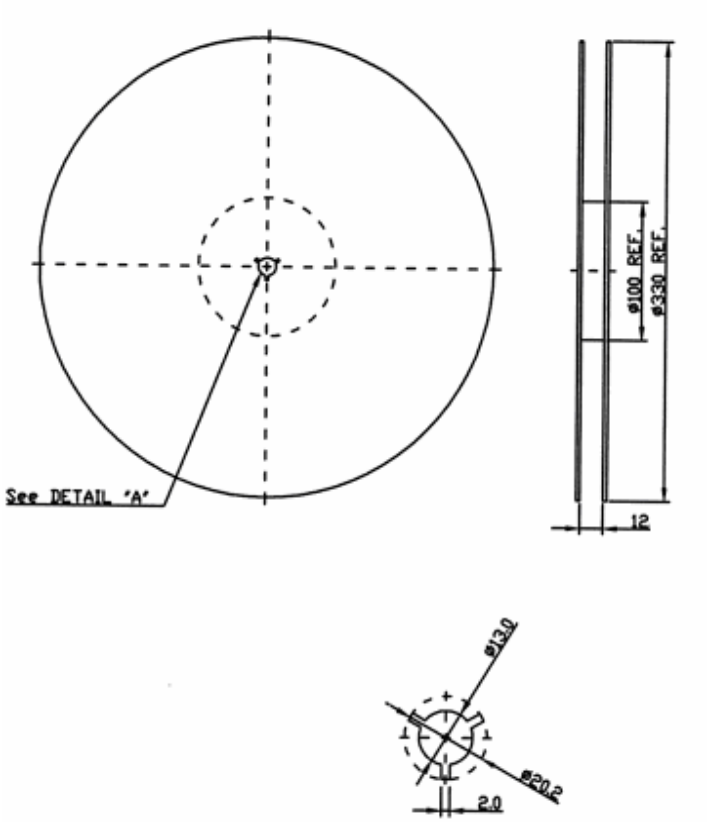

2. TAPE DIMENSION

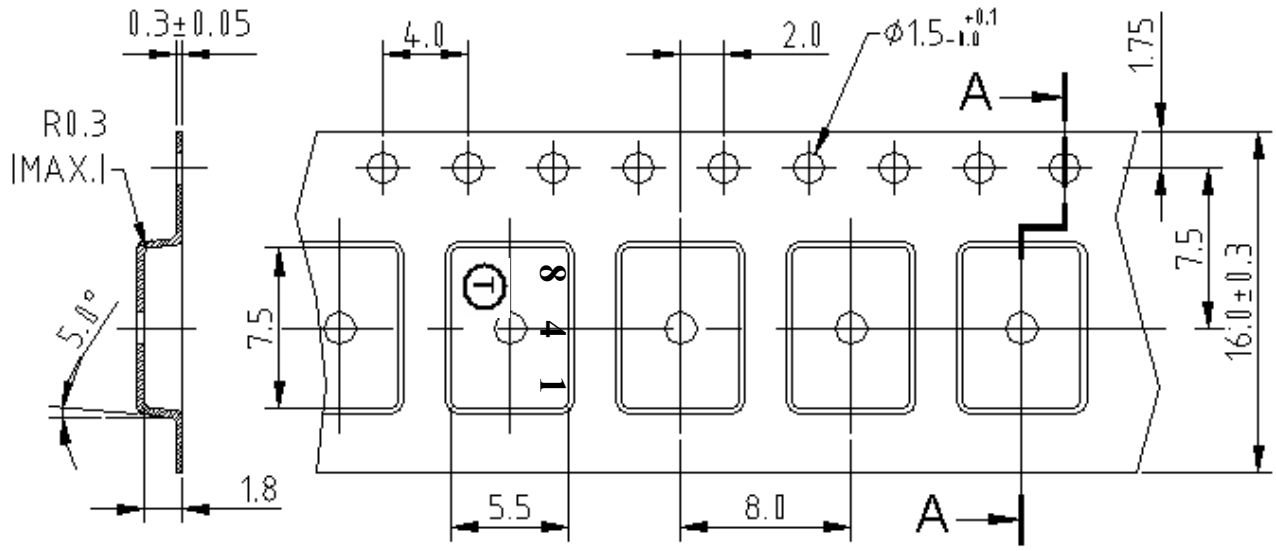

H. RECOMMENDED REFLOW PROFILE :

