


# REL-MR- 24DC/ 1IC

Order No.: 2961341



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2961341>

Pluggable miniature relays, with power contact for lamp loads and capacitive loads, 1 N/O contact, input voltage 24 V DC

Commercial data	
GTIN (EAN)	 4 017918 187569
sales group	G084
Pack	10 pcs.
Customs tariff	85364190
Catalog page information	Page 93 (IF-2009)

### Product notes

WEEE/RoHS-compliant since:  
04/11/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

Coil side	
Nominal input voltage $U_N$	24 V DC
Input voltage range in reference to $U_N$	(refer to the diagram)
Nominal input current at $U_{IN}$	17 mA
Typical response time	8 ms

Typical release time	3 ms
Coil resistance	1440 $\Omega \pm 10\%$ (at 20°C)

**Contact side**

Contact type	Single contact, 1 N/O contact
Contact material	AgSnO
Maximum switching voltage	250 V AC/DC
Minimum switching voltage	12 V (at 100 mA)
Maximum inrush current	80 A (20 ms)
	130 A (peak, at capacitive load, 230 V AC, 24 $\mu$ F)
Min. switching current	100 mA (for 12 V DC)
Limiting continuous current	16 A
Interrupting rating (ohmic load) max.	80 W (for 220 V DC)
	50 W (for 110 V DC)
	48 W (for 60 V DC)
	58 W (for 48 V DC)
	384 W (at 24 V DC)
	4000 VA (for 250 V AC)

**General data**

Width	12.7 mm
Height	29 mm
Depth	15.7 mm
Test voltage relay winding/relay contact	5 kV AC (50 Hz, 1 min.)
Ambient temperature (operation)	-40 °C ... 85 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Operating mode	100% operating factor
Mechanical service life	3 x 10 <sup>7</sup> cycles
Standards/regulations	IEC 60664
	EN 50178
	IEC 62103
Pollution degree	3
Surge voltage category	III
Mounting position	Any
Assembly instructions	Can be aligned without spacing (> 70 °C $\geq$ 2.5 mm)

**Certificates / Approvals**



Certification


CUL, GL, GOST, UL, VDE-PZI

**Additional products**

Item	Designation	Description
<b>General</b>		
2967837	PLC-BSC- 24DC/ 1IC/ACT	14 mm PLC-IC basic terminal blocks with screw connection method, input voltage 24 V DC(without relay or optocoupler)
2912400	PLC-BSP- 24DC/ 1IC/ACT	14 mm PLC basic terminal blocks with spring-cage connection method, input voltage 24 V DC(without relay or optocoupler)
2833518	PR1-BSC2/2X21	Relay socket PR1..., for miniature power relay or miniature switching relay with 1 or 2 PDT or solid-state relay of same construction, 2/2 level design, screw connections, connection facility for input/interference suppression modules
2833521	PR1-BSC3/2X21	Relay socket PR1..., for miniature power relay or miniature switching relay with 1 or 2 PDT or solid-state relay of same construction, 1/3 level design, screw connections, connection facility for input/interference suppression modules
2833534	PR1-BSP3/2X21	Relay socket PR1..., for miniature power relay or miniature switching relay with 1 or 2 PDT or solid-state relay of same construction, 1/3 level design, spring-cage connections, connection facility for input/interference suppression modules


**Diagrams/Drawings**

Drilling plan/solder pad geometry

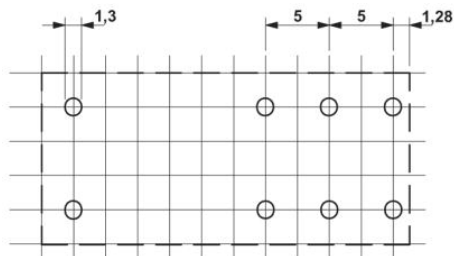


a = pitch division 2.5 mm


Diagram

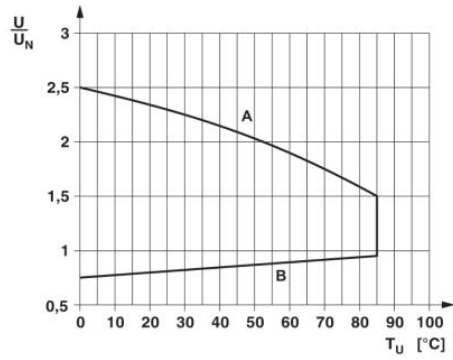

Dimensioned drawing

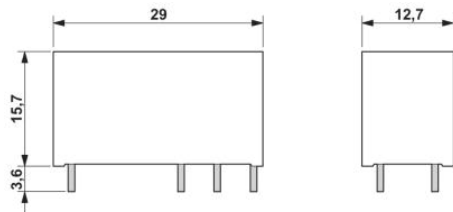

Circuit diagram

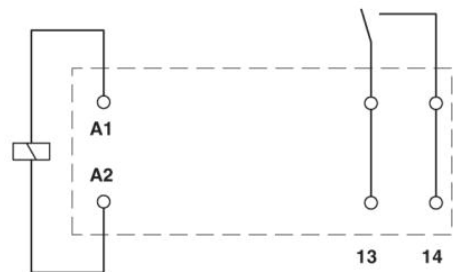

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact  
Technical modifications reserved;