


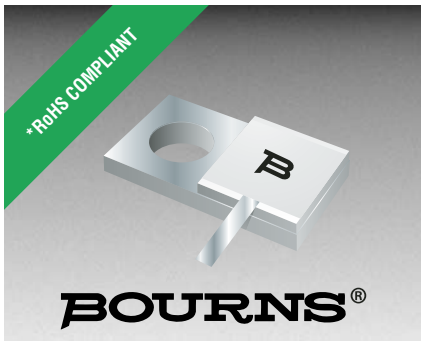

Features

- DC to 4 GHz
- Flanged model
- Low VSWR

Applications

- High power RF transmission

CHF5225CBF Series 60 W Power RF Flanged Chip Termination


General Specifications

SubstrateBeo
Resistive Film.....Thick Film
TabAg
Cover Substrate.....AL203
Mounting FlangeCu plated with Ni
Resistance.....50 Ω
Tolerance..... $\pm 5\%$
Packaging100 pcs./tray

Absolute Ratings


Power.....60 W
Frequency4.0 GHz
VSWR.....1.2 Maximum

Characteristic Curve

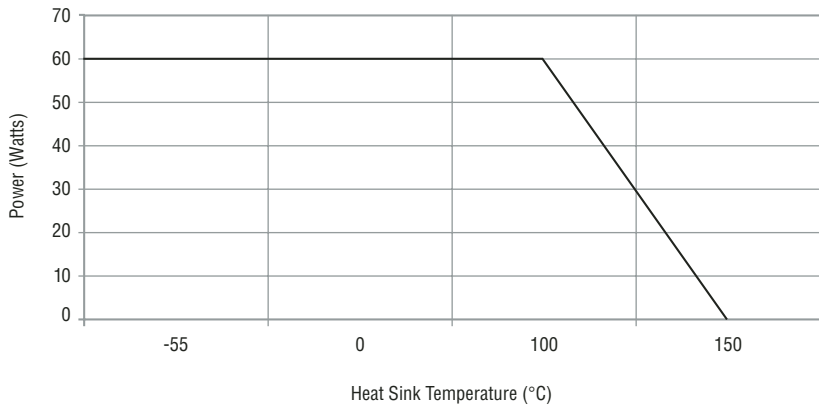


Product Dimensions


Version C

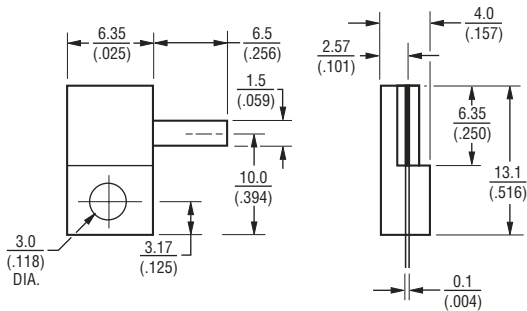

Version D



Version E



How To Order

CHF 5225 C B F 500 L

Model _____
Size _____
Version _____
Substrate _____
Mount _____
F = Flange
Value _____
500 = 50 Ohm
Function _____
L = Termination



Reliable Electronic Solutions

Asia-Pacific:

Tel: +886-2 2562-4117
Fax: +886-2 2562-4116

Europe:

Tel: +41-41 768 5555
Fax: +41-41 768 5510

The Americas:

Tel: +1-951 781-5500
Fax: +1-951 781-5700

www.bourns.com