


NOTES:

1. ROHS COMPLIANT
2. MATERIAL: LENS - POLYCARBONATE, UL 94-V2
3. MOISTURE SEAL - EPDM
4. MOUNTING: MOUNTS IN A $\phi .171" \pm .002$ [$\phi 4.34\text{mm} \pm .05$] PANEL HOLE ON .250" [6.35mm] CENTER
5. PANEL HOLE SHALL BE DEBURRED, BUT NOT CHAMFERED
6. PANEL THICKNESS: .031" [.8 mm] to .094" [2.39mm]
7. ASSEMBLY:
 - A.) INSERT LENS INTO PANEL HOLE
 - B.) SLIDE RNG 132 RETAINING RING ON BACK OF LENS
 - C.) INSERT LED INTO LENS
8. U.S. & FOREIGN PATENT ISSUED




REVISIONS					
ECN #	REV.	DESCRIPTION	DATE	INITIALS	CHK'D
353	000	INITIAL RELEASE	2/20/12	KH	AZ


RETAINING RING
(ORDER SEPARATELY)



RNG 132

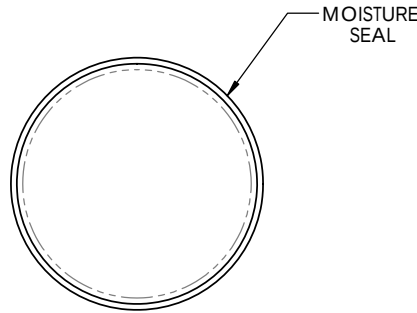


MOISTURE SEAL

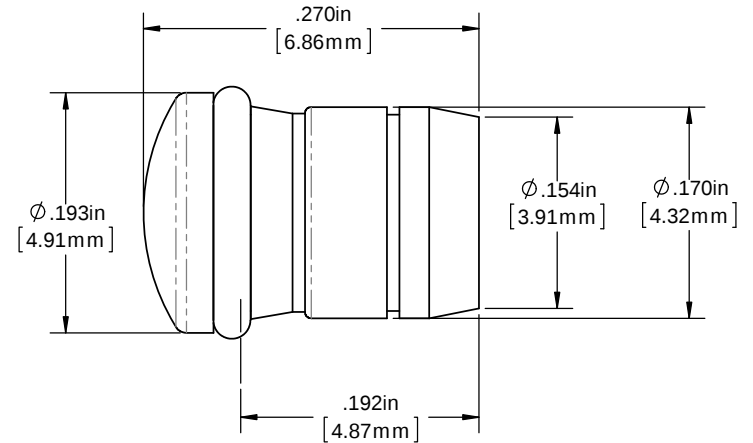

ORDERING CODE : **SMS 172 XXX**

MODEL

LENS COLOR	
RTP	RED TRANSPARENT
ATP	AMBER TRANSPARENT
GTP	GREEN TRANSPARENT
BTP	BLUE TRANSPARENT
YTP	YELLOW TRANSPARENT
CTP	CLEAR TRANSPARENT

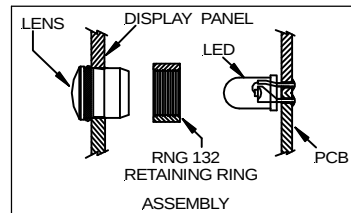

DIMENSION STYLE: INCHES (MM) GENERAL TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPROVAL	DATE	 12780 DANIELSON CT, SUITE A, POWAY, CA 92064 U.S.A PHONE: (800) 522-5546 EMAIL: vccsales@vccclite.com	
INCHES MM		DRAWN	KHOWARD		2/20/12
X ± .020 ± .508		CHECKED	AZANELLI		3/5/12
XX ± .010 ± .254 XXX ± .005 ± .127					
ANGLE ± 1°		MATERIAL		TITLE:	
		SEE NOTES		3MM FRESNEL LENS W/ MOISTURE SEAL, ROUND LOW PROFILE	
THIRD ANGLE PROJECTION		FINISH		SIZE DWG. NO.	
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VISUAL COMMUNICATIONS COMPANY, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF VISUAL COMMUNICATIONS COMPANY, INC IS PROHIBITED.		SEE NOTES		B SMS 172 XXX	
DO NOT SCALE DRAWING		SCALE: 10:1		REV 000 SHEET 1 OF 1	