

Preliminary

20 W DC-DC Converter P20E-Series

- Wide input range
- 3000 V_{DC} isolation
- Aluminium heat sink case
- Continuous short circuit protection
- Over current protection
- Over continuous short circuit protection
- Output over voltage protection
- Over temperature protection
- Wide operation temperature range -40...100 °C
- Adjustable output voltage
- On / Off remote control input
- EN 50155 standard



Model guide

Type	Input voltage		Input current		Output voltage [V _{DC}]	Output current		Efficiency [%] typ.	Capacitor load (note2) [μF] max.
	Nominal [V _{DC}]	Range [V _{DC}]	no load [mA] typ.	full load [mA] typ.		[mA] min.	[mA] max.		
Single									
P20E243R3SK	24	13...70	10	710	3.3	0	4500	87	7000
P20E2405SK	24	13...70	10	950	5.0	0	4000	88	5000
P20E2412SK	24	13...70	10	940	12.0	0	1670	89	850
P20E2415SK	24	13...70	10	930	15.0	0	1330	90	700
P20E1103R3SK	110	42...176	10	160	3.3	0	4500	86	7000
P20E11005SK	110	42...176	10	205	5.0	0	4000	89	5000
P20E11012SK	110	42...176	10	210	12.0	0	1670	86	850
P20E11015SK	110	42...176	10	210	15.0	0	1330	86	700
Dual									
P20E243R3DK	24	13...70	10	970	±3.3	0	±2000	86	2 x 1000
P20E2405DK	24	13...70	10	925	±5.0	0	±833	90	2 x 680
P20E2415DK	24	13...70	10	925	±15.0	0	±666	90	2 x 470
P20E1103R3DK	110	42...176	10	220	±3.3	0	±2000	84	2 x 1000
P20E11005DK	110	42...176	10	210	±5.0	0	±833	87	2 x 680
P20E11015DK	110	42...176	10	210	±15.0	0	±666	87	2 x 470

Specifications

Input	
Start up voltage	P20E24xxSK: 12.3 V _{DC}
	P110E24xxSK: 40.5 V _{DC}
Under voltage lockout	P20E24xxSK: 11.6 V _{DC}
	P110E24xxSK: 38.4 V _{DC}
Filter	PI Network
Start up time with R-load	30 ms, typ.
Reflected ripple current	20 mAp-p, (see figure 1)
ON / OFF Control threshold (see figures 6)	On: 3...12 V _{DC} or open input Off: 0...1.2 V _{DC} Standby idle current 3 mA, typ.
Isolation:	
Input / output voltage for 60 s	3000 V _{DC}
Input or output to case for 60 s	1600 V _{DC}
Resistance	10 ⁹ Ω
Capacitance	2000 pF, typ.
Output	
Voltage accuracy	± 1 %, max.
Line voltage regulation	± 0.5 %, max.
Load regulation 0...100 % load	P20ExxxSK ± 0.5 %, max. P20ExxxDK ± 1 %, max. @ balanced load
Voltage trim range (see fig. 5)	± 10 %, only single output type
Over voltage protection	140 % of nominal V _{out} , typ.
Over load protection	170 % of full load, typ.
Short circuit protection, hiccup	Indefinite, automatic restart
Transient recovery time @ 25 % load change steps	250 μs, typ.
Transient response deviation @ 25 % load change steps	P20Exx3R3SK ± 5 %, max. All other: ± 3 %, max.
Temperature coefficient	± 0.02 % / °C
Ripple and noise (at 20 MHz BW)	≤ 75 mVp-p, (see figure 2)
Cross deviation	5 %, typ. at 75 % load difference
General	
Switching frequency	P20E24xxx: 330 kHz, typ. P20E110xxx: 245 kHz, typ.
Safety Standard	EN 50155, EN-, IEC 60950-1
Reliability calculated MTBF MIL-HDBK-217F at 25 °C	190.000 h

EMC Characteristics	
Radiated Emissions, EN50121-3-2	40 dBμV at 20...230 MHz 47 dBμV at 230 MHz...1 GHz
Conducted Emissions EN 50121-3-2 (see figure 3)	99 dBμV at 150...500 kHz 93 dBμV at 500 kHz...30 MHz
ESD, EN 50121-3-2, perf. crit. A	Air ± 8 kV Contact ± 6 kV
RS, EN 50121-3-2 perf. crit. A	20 V/m
EFT, EN 50121-3-2, perf. crit. A (see figure 3)	2 kV
Surge, EN 50121-3-2, perf. crit. A (see figure 3)	2 kV
CS, EN 50121-3-2 perf. crit. A	10 V
PFMF, EN 61000-4-8 perf. crit. A	100 A/m
Environmental	
Operating ambient temperature (see derating diagram)	-40...61 °C, without derating -40...100 °C, with derating
Storage temperature	-55...125 °C
Case temperature	105 °C, max.
Over temperature protection	115 °C surface, typ.
Thermal impedance	11.5 K/W, typ.
Humidity	95 %, max. non condensing
Thermal shock	IEC 60068
Mechanical shock and vibration	EN 61373
Free air convection cooling	30...65 LFM (15...35 cm/s)
Physical	
Dimensions	27.6 x 27.6 x 16.9 mm
Weight	22.7 g
Case material	Copper
Potting material	Epoxy (UL94V-0 rated)
Absolute maximum ratings	
Input voltage ≤ 100 ms	P20E24xxSK 100 V _{DC} , max. P20E110xxSK 185 V _{DC} , max.
Pin soldering temperature	≤ 260 °C, ≤ 10 s, ≥ 1.5 mm distance from body

Preliminary 20 W DC-DC Converter P20E-Series

Notes:

1. All parameter are typical at 25 °C, nominal input voltage and full load specified, unless otherwise noted.
2. Capacitive load tested by minimal input voltage and constant resistive load.

Figure 1 Measure circuit for reflected input ripple current


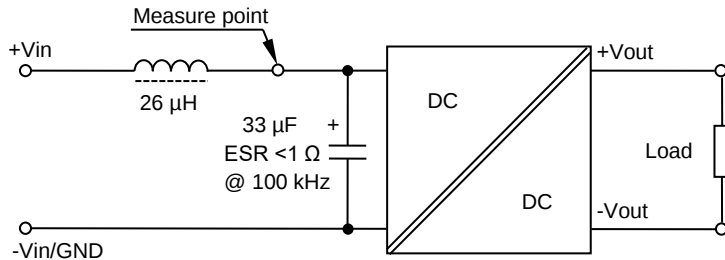


Figure 2 Measure circuit for output ripple & noise voltage, measure band wide 20 MHz

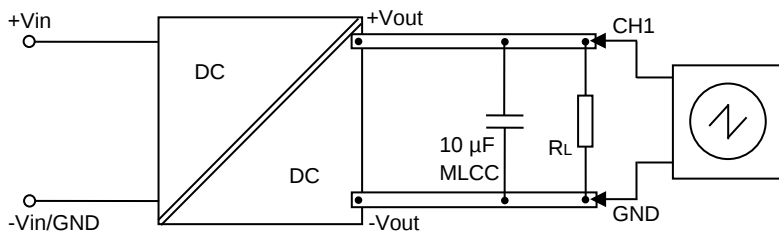

To meet the specified ripple and noise level are for the output filter circuit multilayer ceramic capacitors necessary.

Figure 3 Application circuit for ripple & noise reduction to meet conducted emission EN 50121-3-2 class A


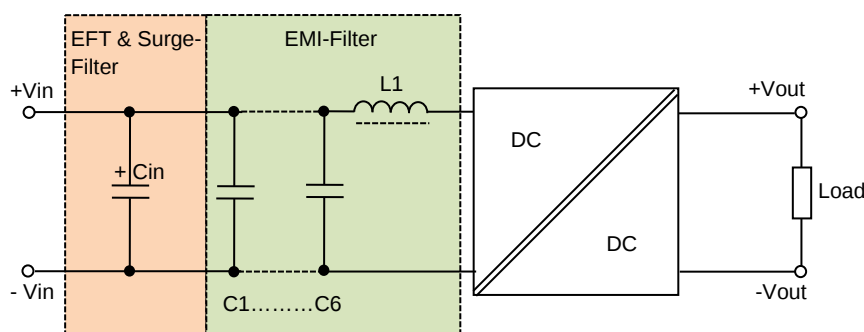



Table component for Figure 3			
Type	Cin	C1...C6	L1
P20E24xxx	330 µF, 100 V, Nippon Chemicon, EKY-101ELL331ML25S	None	None
P20E110xxx	100 µF, 250 V, Rubycon, 250BXF100M16x20-ND	1 µF, Ceramic, 250 V	12 µH

Preliminary **20 W DC-DC Converter P20E-Series**


Figure 4 Output voltage trimming application (only single output converter)

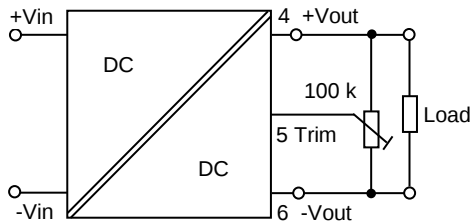


Figures 5 ON/OFF remote control application circuit

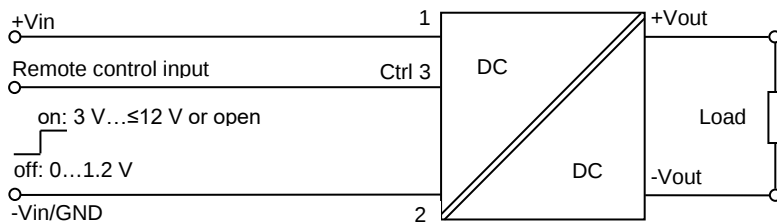

ON/OFF remote control application circuit for inverse logic and higher input level possibility




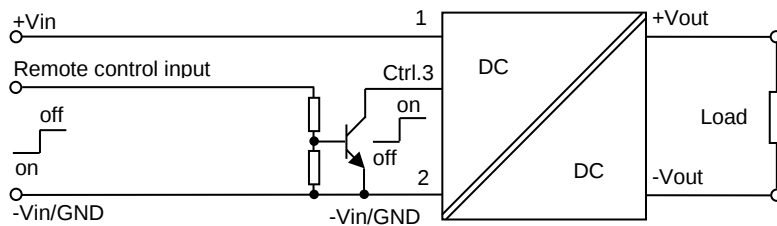


Derating diagram

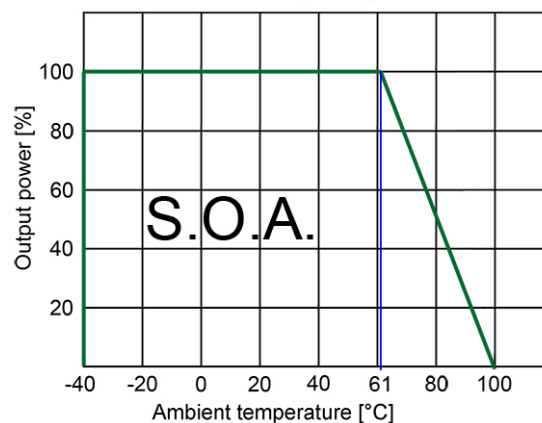

Preliminary 20 W DC-DC Converter P20E-Series

Mechanical dimensions

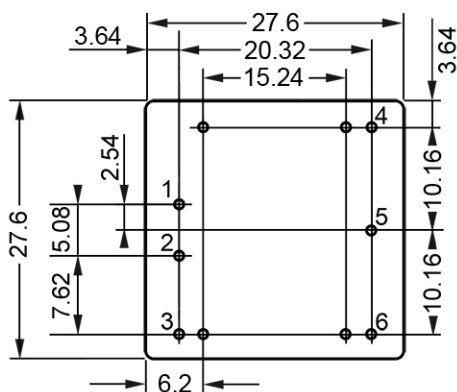

Note:

All dimensions in mm

1. Pin diameter tolerance ± 0.05 mm
2. Pin pitch and length tolerance ± 0.35 mm
3. Pin to case tolerance ± 0.5 mm
4. Case tolerance ± 0.5 mm
5. Stand off tolerance ± 0.1 mm
6. Recommended Pin hole diameter 1.5 mm

Pin assignment		
Pin	Single out	Dual out
1	+Vin	+Vin
2	-Vin	-Vin
3	Rem. Ctrl.	Rem. Ctrl.
4	+Vout	+Vout
5	Trim	Com
6	-Vout	-Vout

PHI-CON is a trademark of HY-LINE Holding GmbH.

Only for professional use by professionals! Not for resale or distribution to the general public in any way! Read the instructions carefully before using!

Life Support Policy: HY-LINE does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Rev: 20180910 f