

HC-B 24-KML-80/O1STM40

Order No.: 1644805

The illustration shows the version HC-B 16-KML-80/O1STM40



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1644805>

HEAVYCON coupling housing B24, with single locking latch, height 80 mm, without support 1xM40

Commercial data

GTIN (EAN)	 4 017918 907730
sales group	D002
Pack	10 pcs.
Customs tariff	85389099
Catalog page information	Page 497 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
03/01/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data


General data

Note	For contact inserts HC-B24, BB46, D64, DD108, M
Design	B24
Height	80 mm
Width	43 mm
Length	120 mm
Housing type	Coupling housings

Locking type	With single locking latch
Type of the screw connection	1x M40
Degree of protection	IP65
Ambient temperature (operation)	-40 °C ... 125 °C
Housing material	Aluminum, die-cast
Housing surface material	Powder-coated, gray
Seal material	NBR
Material lock	High-grade steel, handle: PA-GF
Material grip body interlock	PA-GF

Diagrams/Drawings

Dimensioned drawing

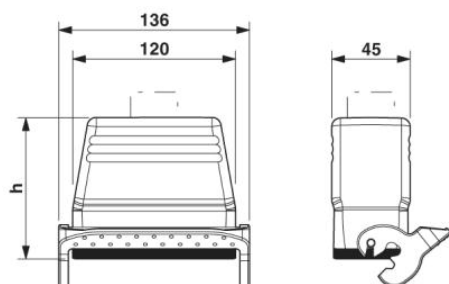

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;