

These products represent our selection of miniature tubular high frequency crystals. They feature outstanding shock/vibration resistance and environmental characteristics.

[Request a Sample](#)

ECS-3X10X, 3X9X



- Cost Effective
- Excellent Aging
- Wide Frequency Range
- Excellent Reliability
- Pb Free/RoHS Compliant

DIMENSIONS (mm)

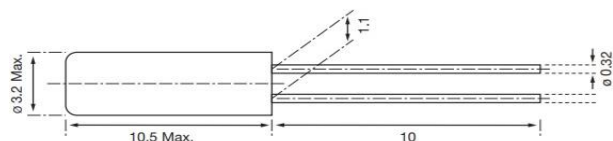


Figure 1) ECS-3x10X

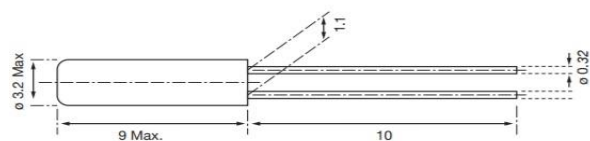


Figure 2) 3x9X

OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS

PARAMETERS	CONDITIONS	ECS-3X10X	ECS-3X9X	UNITS
Frequency	F ₀	3.50 ~ 9.83	4.00 ~ 70.00	MHz
Frequency Tolerance	@ +25°C	± 50		ppm
Frequency Stability	-10 ~ +60°C	± 50		ppm
Operating Temperature	T _{opr}	-10 ~ +60		°C
Storage Temperature	T _{stg}	-40 ~ +85		°C
Load Capacitance	C _L	16 pF typ. (Customer Specified)		pF
Shunt Capacitance	C ₀	5.0 max.		pF
Drive Level	DL	50 ~ 100		μW
Insulation Resistance	DC 100V±15V	500MΩ min.		MΩ
Aging (First Year)	@ +25°C ±3°C	±5 ppm max.		ppm

Frequency (MHz)	ESR Ω Max.	Mode
3.50 ~ 4.00	200	Fundamental
4.00 ~ 6.00	150	Fundamental
6.00 ~ 10.00	100	Fundamental
10.00 ~ 30.00	50	Fundamental
30.00 ~ 36.00	100	3 rd Overtone
36.00 ~ 70.00	80	3 rd Overtone

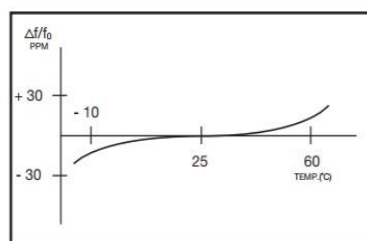


Figure 3) Frequency vs Temperature Curve

PART NUMBERING GUIDE:

Manufacturer	Frequency	Load Capacitance*	Package Type**
ECS	35	16	10X
ECS	160	16	9X

* Load capacitance (xx = xx pF, S = Series)

** Package type examples (10 = 3x10, 9X = 3x9)

SOLDER PROFILE
Peak solder Temp +260°C Max 10 sec Max.
2 Cycles Max.
MSL 1, Lead Finish Sn/Cu Matte

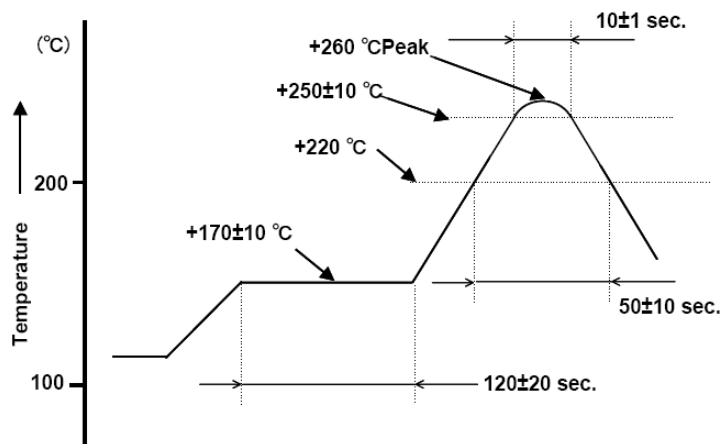


Figure 1) Suggested Reflow Profile

DEVELOPED FREQUENCIES ECS-3X10X	
Abbreviation	Frequency (MHZ)
035	3.579545
036	3.6864
040	4.000
049	4.9152
050	5.000
060	6.000
073	7.3728
080	8.000
081.92	8.192
098.3	9.8304

DEVELOPED FREQUENCIES ECS-3X9X	
Abbreviation	Frequency (MHZ)
100	10.000
110.5	11.0592
120	12.000
143	14.31818
147.4	14.7456
160	16.000
184	18.432
196.6	19.6608
200	20.000
240	24.000
245.7	24.576
250	25.000
270	27.000
320	32.000